


Miniature Pushbutton Switches

Specifications:



Contact rating:	30 V DC, 100 mA
Contact resistance:	< 20 mΩ
Insulation resistance:	> 100 MΩ
Dielectric strength:	500 V, 50 Hz for the duration of 1 minute
Operating temperature:	-10 °C to +60 °C
Electrical life:	minimum 10 000 operations
Contacts:	beryllium-copper, silver-plated
Terminals:	brass, silver-plated
Case:	base: PBT, cover: POM, actuator: POM
Mounting:	on pc-board
Timing:	non-shorting
Soldering conditions:	wave-soldering – max. 5 sec, 260 °C ± 5 °C

Models:

MPSA-22E08L-0
MPSA-22E08-0

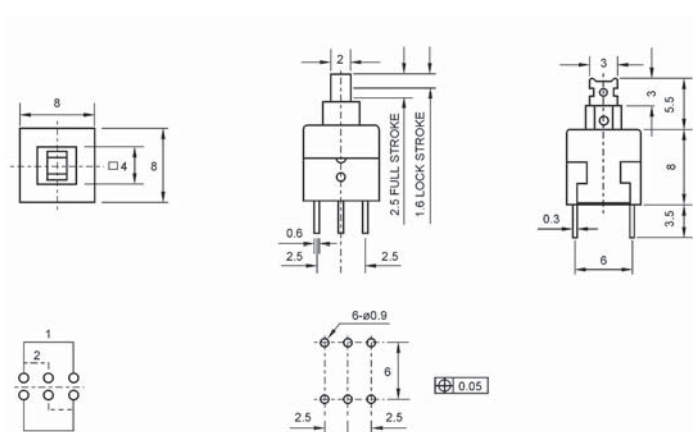

MPSA-42E06L-0
MPSA-42E06-0

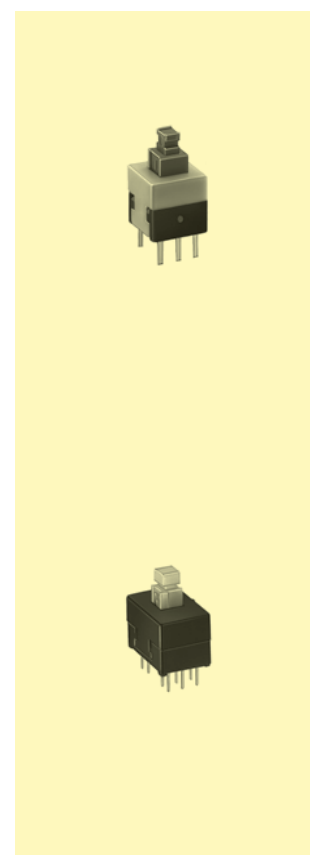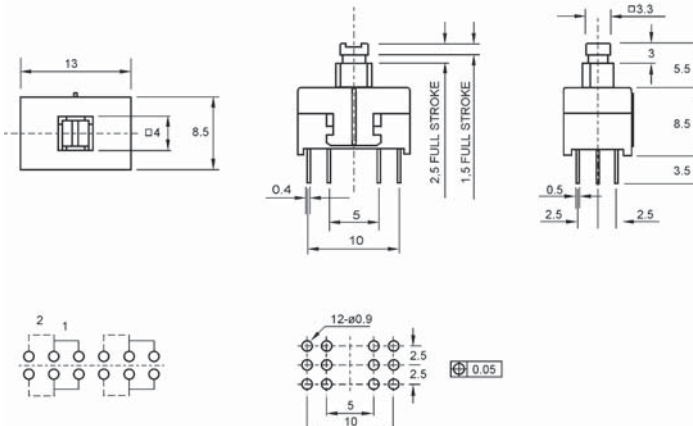

Minimum order quantity 1.000 pcs

Ordering code:

