



Feed through terminal blocks

Screw clamp to quick-connect, DIN 1-3

Quick
connect




M 4/6.2G




BAM2




FEM6G




SCF6G




CBM...




BJMI6



M 4/6.3G



BAM2



FEMG



BJMI6

M 4/6.2G - 4 mm² blocks - 6 mm .236" spacing

Characteristics

Wire size (Screw clamp) mm ² / AWG	Solid Stranded	IEC NFC DIN	UL	CSA
		0.5 - 4 mm ² 0.5 - 4 mm ²	22-10 AWG	24-12 AWG
Wire size (quick-connect) mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	750 V Gr.C	600	300
Current	A	25	20	25
Rated wire size	mm ² / AWG	4 mm ²	10 AWG	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.4-0.6 Nm / 3.5-5.3 lb.in		

Selection

Description	Type	Order P/N	Packaging
Terminal block with partition. Output : Screw clamp to horizontal quick connect tabs			
grey 	M 4/6.2G	0115 189.11	50
blue 	M 4/6.2G.N	0125 189.13	50
beige V0 	M 4/6.2G.V0	0195 189.12	50

Accessories

End stop		BAM2	9.9 mm	0206 351.16	50
End section	grey 	FEM6G	2.5 mm	0113 027.07	20
	blue 	FEM6G	2.5 mm	0123 027.01	10
	beige V0 	FEM6G	2.5 mm	0193 027.00	20
Separator end section	grey 	SCF6G	3 mm	0113 075.17	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10
Shield connector		CBM5	0.5 mm	0178 745.14	50
		CBM8	0.8 mm	0178 746.15	50

M 4/6.3G - 4 mm² blocks - 6 mm .236" spacing

Characteristics

Wire size (Screw clamp) mm ² / AWG	Solid Stranded	NFC DIN	UL	CSA
		0.2 - 4 mm ² 0.22 - 4 mm ²	—	20-12 AWG
Wire size (quick-connect) mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	500 V Gr.C	—	300
Current	A	25	—	25
Rated wire size	mm ² / AWG	4 mm ²	—	12 AWG
Wire stripping length	mm / inches	9.5 mm / .374"		
Recommended torque	Nm / lb.in	0.5-0.8 Nm / 4.4-7.1 lb.in		

Selection


Description	Type	Order P/N	Packaging
Terminal block with partition. Output : Screw clamp - vertical quick-connect tabs to vertical quick-connect tabs			
grey 	M 4/6.3G	0115 279.02	50

Accessories


End stop	grey	BAM2	9.9 mm	0206 351.16	50
End section	grey 	FEMG	1.5 mm	0114 144.12	25
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10

Quick-connect terminal blocks

Quick-connect to quick-connect, DIN 1-3



M 2,5/6.2G.2G

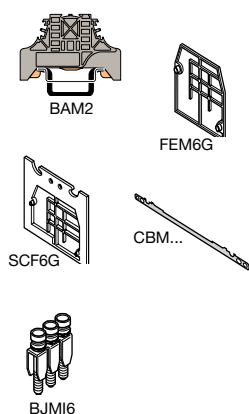

M 2,5/6.2G.2G - 2,5 mm² blocks - 6 mm .236" spacing

Characteristics

		IEC	UL	CSA
		NFC	DIN	
Wire size mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	630	600	300
Current	A	20	25	20
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG

Selection

Description	Type	Order P/N	Packaging
Standard block, outputs : horizontal quick-connect tabs to horizontal			
quick-connect tabs grey ☐	M 2,5/6.2G.2G	0115 191.03	50
beige V0 ☐	M 2,5/6.2G.2G.V0	0195 191.04	50

Accessories

End stop	grey ☐	BAM2	9.9 mm	0206 351.16	50
End section	grey ☐	FEM6G	2.5 mm	0113 027.07	20
	beige V0 ☐	FEM6G	2.5 mm	0193 027.00	20
Separator end section	grey ☐	SCF6G	3 mm	0113 075.17	20
	grey V0 ☐	SCF6G	3 mm	0193 075.10	20
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10
Shield connector		CBM5	0.5 mm	0178 745.14	50
		CBM8	0.8 mm	0178 746.15	50

M 2,5/6.4G.1 - 2,5 mm² blocks - 6 mm .236" spacing

Characteristics


		IEC	UL	CSA
		NFC	DIN	
Wire size mm ² / AWG	Quick-connect	2.8 x 0.8 mm series 110 - 1.5 mm ² max. 6.3 x 0.8 mm series 250 - 2.5 mm ² max.		
Voltage	V	630	600	300
Current	A	35	25	25
Rated wire size	mm ² / AWG	2.5 mm ²	10 AWG	12 AWG

Selection

Description	Type	Order P/N	Packaging
Terminal block with partition. Output : vertical quick-connect tabs to vertical			
quick-connect tabs grey ☐	M 2,5/6.4G.1	0115 280.20	50

Accessories

End stop	grey ☐	BAM2	9.9 mm	0206 635.16	50
End section	grey ☐	FEMG	1.5 mm	0114 144.12	25
Assembled jumper bar (with IP20 protection)	2 poles	BJMI6	32 A	0176 663.00	10
	3 poles	BJMI6	32 A	0176 664.01	10
	4 poles	BJMI6	32 A	0176 665.02	10
	5 poles	BJMI6	32 A	0176 666.03	10
	10 poles	BJMI6	32 A	0176 667.04	10



M 2,5/6.4G.1

