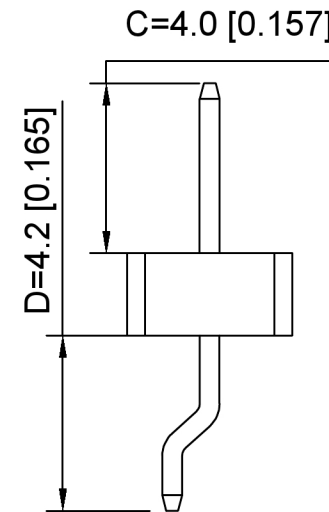
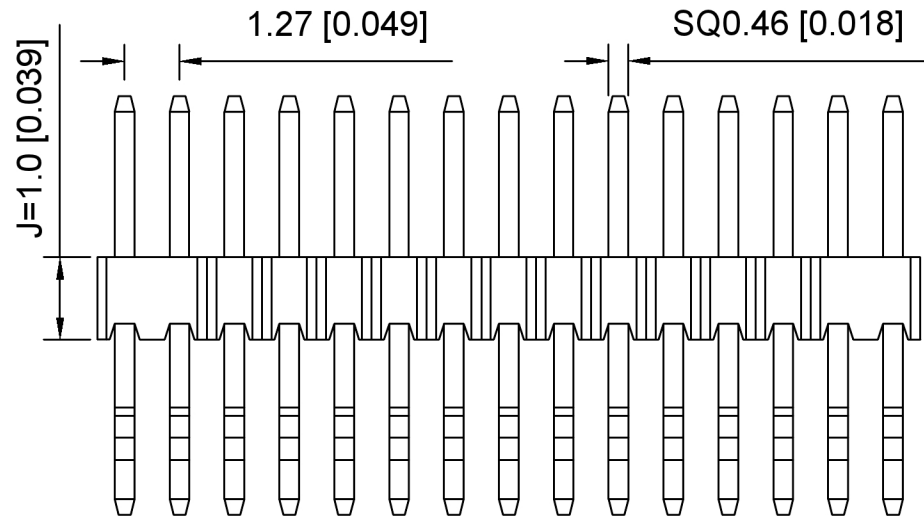
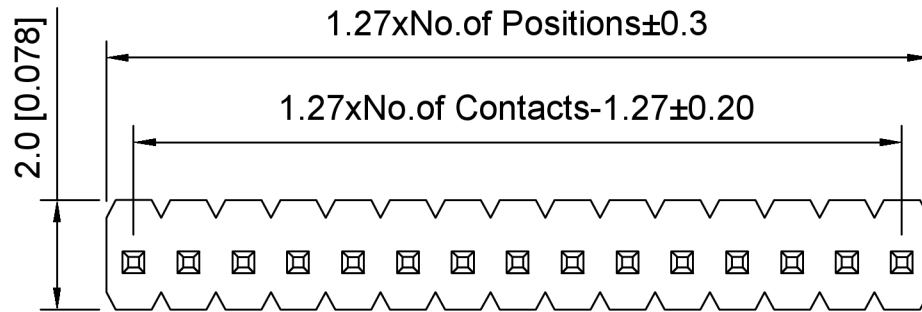


PCB LAYOUT

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:1A AC/DC

额定电流: 1A AC/DC

Withstanding voltage:300V AC/minute

耐受电压: 300V AC/分钟

Temperature range:-40℃-+105℃

温度范围: -40℃-+105℃

Insulation resistance:≥500MΩ

绝缘电阻: ≥500MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

Material:PA6T UL94V-0

材质: PA6T UL94V-0

Plating Category:1U"Gold

镀层: 1U"Gold

Reflow soldering temperature:260±5℃, 10S

回流焊温度: 260±5℃, 10S

X1311	W	R	S	XX	J	C40	D42
①	②	③	④	⑤	⑥	⑦	⑧

1.Series No.

2.Category:W-Water

3.Welding Board Angle:R-Stright 90°

4.Welding Way S-SMT

5.Row No -Pin No:XX Pin

6.Plastic height:J=1.0mm

7.Pin length: C=4.0mm

8.Pin length:D=4.2mm

X1311WRS-XXJ-C40D42	PA6T	Brass	X1311F
PART NO	Material	Material(Pin)	Suitable XKB Female

}	DSND		SCALE: N/A	MODEL TYPE: 1.27mm BTB Connector		
	DWN		VIEW: 	PART NO.: X1311WRS-XXJ-C40D42		
	CHKD		UNIT: mm/in	DWG NO.: X-X1311WRS-XXJ-C40D42		
	APPD		SIZE: A4			
	L PRECISION CO.,LIMITED			WEIGHT	SHEET	REVISION
				1/1	A0	

XKB

XKB INDUSTRIAL PRECISION CO.,LIMITED

广东星坤科技股份有限公司					
ΔX		日期			
ΔX		日期			
ΔX		日期			
MARK	DESCRIPTION	DATE	REVISED	APPROVED	
文件工程章					
REVISIONS					
UNSPECIFIED TOLERANCES					
www.helloxkb.com www.helloxkb.cn www.xk-dg.cn					

ANGLAR	±5°
L≤ 4	±0.2
4<L≤ 16	±0.3
16<L≤ 63	±0.4
L> 63	±0.5