Product data sheet

Specification





Indicating Bank, 70mm, illuminated lens unit, green, steady on, 10 W, 250 VAC/DC

XVBC33

Product availability: Stock - Normally stocked in distribution facility

Price*: 61.00 USD

Main

| Range of Product | Harmony XVB Universal |
|------------------------------------|--------------------------------------|
| Product or Component Type | Indicator bank |
| Beacon or indicator bank unit type | Illuminated unit |
| Signalling type | Steady |
| Mounting diameter | 2.8 in (70 mm) |
| Component name | XVBC |
| Material | Polycarbonate |
| Light source | Bulb not included, green |
| Bulb type | Incandescent BA 15d Protected LED |
| [Us] rated supply voltage | <= 250 V |

Complementary

| Assembly style | Customer assembly, up to 5 units |
|--|--|
| Maximum power dissipation in W | 7 W |
| Connections - terminals | Screw clamp terminals, <= 1 x 1.5 mm² with cable end |
| [Ui] rated insulation voltage | 250 V IEC 60947-1 |
| Nominal voltage limit | 0.851.1 Un IEC 60947-5-1 |
| [Uimp] rated impulse withstand voltage | 4 kV IEC 60947-1 |
| CAD overall width | 2.8 in (70 mm) |
| CAD overall height | 2.5 in (63 mm) |
| CAD overall depth | 2.8 in (70 mm) |

Environment

| Pollution degree | 2 |
|-------------------------------------|---|
| Product Certifications | CCC EAC CSA C22-2 No 14 UL 508 |
| Standards | EN/IEC 60947-5-1 |
| protective treatment | TC |
| Ambient Air Temperature for Storage | -40158 °F (-4070 °C) |

Price is "List Price" and may be subject to a trade discount – check with your local distributor or retailer for actual price.

| Ambient air temperature for operation | -13122 °F (-2550 °C) LED -13158 °F (-2570 °C) incandescent |
|---------------------------------------|--|
| Electrical shock protection class | Class I on support tube IEC 61140 Class II on base unit IEC 61140 |
| IP degree of protection | IP65 on fixing base XVBZ0. IEC 60529 IP66 on base unit IEC 60529 |
| NEMA degree of protection | Type 4X UL indoor) |

Ordering and shipping details

| Category | US100XV22611 |
|-------------------|---------------|
| Discount Schedule | 00XV |
| GTIN | 3389110845068 |
| Returnability | Yes |
| Country of origin | FR |

Packing Units

| Unit Type of Package 1 | PCE |
|------------------------------|----------------------------|
| Number of Units in Package 1 | 1 |
| Package 1 Height | 3.543 in (9.000 cm) |
| Package 1 Width | 3.543 in (9.000 cm) |
| Package 1 Length | 3.937 in (10.000 cm) |
| Package 1 Weight | 4.656 oz (132.000 g) |
| Unit Type of Package 2 | S03 |
| Number of Units in Package 2 | 36 |
| Package 2 Height | 11.811 in (30.000 cm) |
| Package 2 Width | 11.811 in (30.000 cm) |
| Package 2 Length | 15.748 in (40.000 cm) |
| Package 2 Weight | 12.421 lb(US) (5.634 kg) |
| Unit Type of Package 3 | P06 |
| Number of Units in Package 3 | 288 |
| Package 3 Height | 29.528 in (75.000 cm) |
| Package 3 Width | 23.622 in (60.000 cm) |
| Package 3 Length | 31.496 in (80.000 cm) |
| Package 3 Weight | 115.125 lb(US) (52.220 kg) |

Contractual warranty

Warranty 18 months



Green PremiumTM **label** is Schneider Electric's commitment to delivering products with best-inclass environmental performance. Green Premium promises compliance with the latest regulations, transparency on environmental impacts, as well as circular and low-CO₂ products.

Guide to assessing product sustainability is a white paper that clarifies global eco-label standards and how to interpret environmental declarations.

Learn more about Green Premium >

Guide to assess a product's sustainability >





Transparency RoHS/REACh

Well-being performance



Mercury Free



Rohs Exemption Information

Yes

Certifications & Standards


| Reach Regulation | REACh Declaration |
|---------------------------|---|
| Eu Rohs Directive | Pro-active compliance (Product out of EU RoHS legal scope) |
| China Rohs Regulation | China RoHS declaration |
| Environmental Disclosure | Product Environmental Profile |
| Weee | The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins. |
| Circularity Profile | No need of specific recycling operations |
| California Proposition 65 | WARNING: This product can expose you to chemicals including: Lead and lead compounds, which is known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to www.P65Warnings.ca.gov |

Dimensions Drawings

Indicator Bank without "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get \mathbf{b} dimension.




- (1) Base unit XVBC21, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) Cover (supplied with XVBC21 base unit)

| Number of illuminated or audible signalling units (no "flash") | b in mm | b in in. |
|--|---------|----------|
| 1 | 138 | 5.43 |
| 2 | 201 | 7.91 |
| 3 | 264 | 10.39 |
| 4 | 327 | 12.87 |
| 5 | 390 | 15.35 |

Indicator Bank with "Flash" Discharge Tube Unit

Dimensions

Below drawing shows the minimum configuration of the product. Select the number of stages according to the product characteristics in order to get **b** dimension.

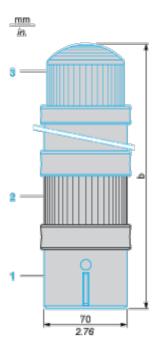

- (1) Base unit XVBC07, to be ordered separately
- (2) Illuminated or audible signalling unit
- (3) "Flash" unit, to be ordered separately

| Number of illuminated or audible signalling units other than "flash" tube | b in mm | b in in. |
|---|---------|----------|
| 1 | 295 | 11.61 |
| 2 | 358 | 14.09 |
| 3 | 421 | 16.57 |
| 4 | 484 | 19.06 |