
1-1969604-2 - ACTIVE

VAL-U-LOK

TE Internal #: 1-1969604-2 Housing, Plug, Wire-to-Wire, 12 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular Power Connectors

View on TE.com >



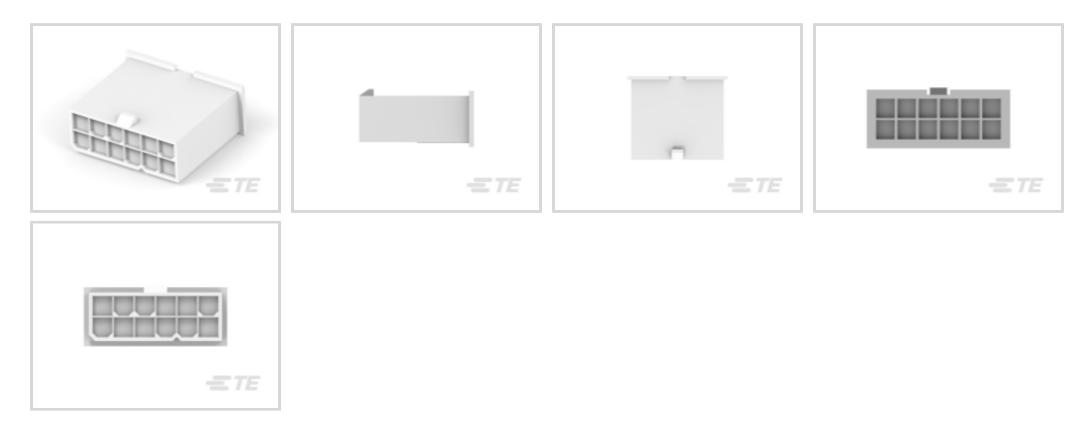

Rectangular Power Connector Type: Housing

Connector & Housing Type: Plug

Connector System: Wire-to-Wire

Number of Positions: 12

Centerline (Pitch): 4.2 mm [.165 in]

Features

E

Product Type Features

Rectangular Power Connector Type	Housing
Connector & Housing Type	Plug
Connector System	Wire-to-Wire
Sealable	No
Connector & Contact Terminates To	Wire & Cable
Configuration Features	
Number of Positions	12
Number of Rows	2
Electrical Characteristics	
Operating Voltage	600 VAC
Contact Features	
Contact Retention Within Housing	Without
Contact Type	Pin

Housing, Plug, Wire-to-Wire, 12 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular Power Connectors



Termination Features

Termination Method to Wire & Cable	Crimp
Mechanical Attachment	
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	4.2 mm[.165 in]
Housing Color	White
Housing Material	Polyamide
Dimensions	
Connector Height	9.6 mm[.937 in]
Product Width	23.8 mm[.937 in]
Product Length	26.4 mm[1.039 in]
Row-to-Row Spacing	4.2 mm[.165 in]
Usage Conditions	
Operating Temperature Range	-40 - 105 °C[-40 - 221 °F]
Operation/Application	
Circuit Application	Power & Signal

Industry Standards

CSA Rating	208567
UL Rating	Recognized
Compatible With Agency/Standards Products	CSA, UL
Compatible With Approved Standards Products	UL E28476
UL Flammability Rating	UL 94V-2
Glow Wire Rating	GWT 750°C (Without Flame)
Packaging Features	
Packaging Quantity	500
Packaging Method	Bag
Product Compliance	
For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant

Housing, Plug, Wire-to-Wire, 12 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular Power Connectors



China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2024 (241) Candidate List Declared Against: JUNE 2024 (241) Does not contain REACH SVHC
Halogen Content	Not Low Halogen - contains Br or Cl > 900 ppm.
Solder Process Capability	Not reviewed for solder process capability


Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

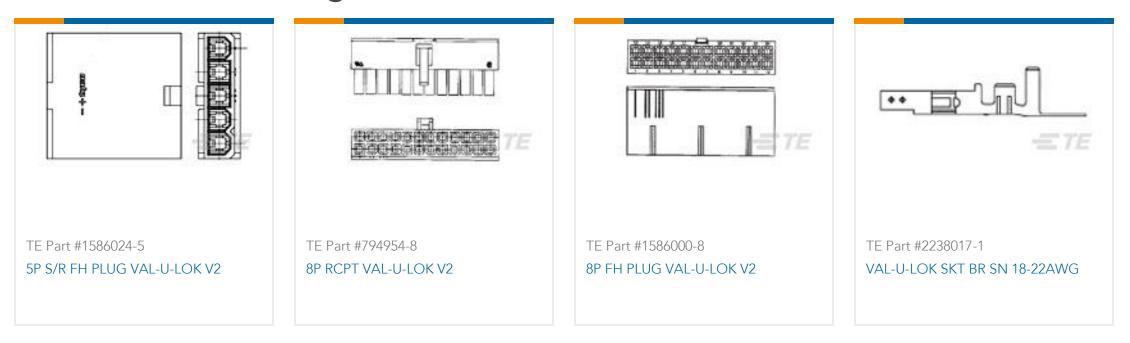

Housing, Plug, Wire-to-Wire, 12 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular Power Connectors







Documents

Product Drawings 12P FH PLUG VAL-U-LOK FH GW

English

CAD Files 3D PDF

3D

Customer View Model ENG_CVM_CVM_1-1969604-2_A_c-1-1969604-2-a.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-1969604-2_A_c-1-1969604-2-a.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_1-1969604-2_A_c-1-1969604-2-a.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages 1-1773730-3 VAL-U-LOK Connectors with TPA Flyer

English

Product Specifications

Engineering Report

English

Instruction Sheets

Instruction Sheet (U.S.)

S For support call+1 800 522 6752

Housing, Plug, Wire-to-Wire, 12 Position, 4.2 mm [.165 in] Centerline, Wire & Cable, UL 94V-2, GWT 750°C (Without Flame), Rectangular Power Connectors



English