
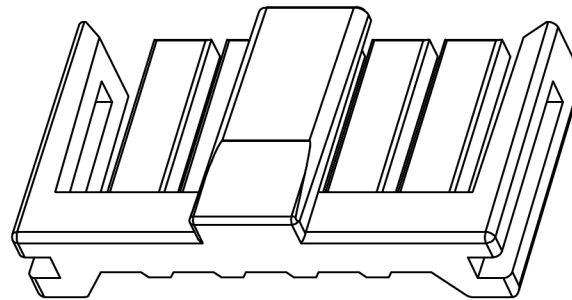
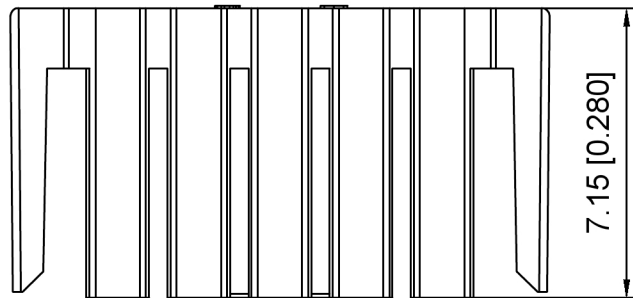

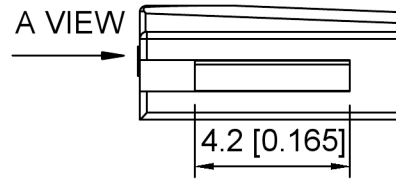


Specification:
 Volatage Rating:250V AC/DC
 Current Rating :3A AC/DC
 Withstaning Voltage:800V AC/Minute
 Temperature Range:-40°~+125°
 Insulation Resistance:≥1000MΩ
 Contact Resistance:≤10MΩ

K 201900 L - XX - PT
 ① ② ③ ④ ⑤

- 1.K:XKBTEK-Car Connector
- 2.XKB Series No
- 3.Special No:L-Lock catch
- 4.Row No.Pin No:XX-02~05
- 5.Material:PT-PBT

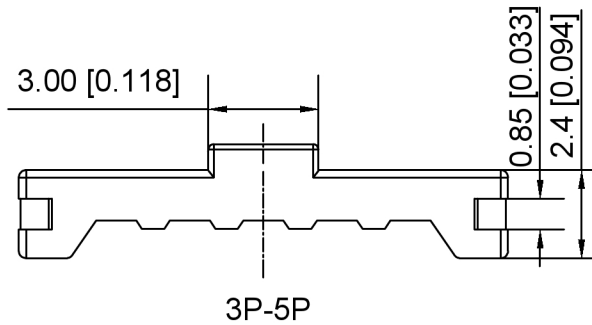

Poles	Dimensions(mm)	
	A	B
02	2.0	7.3
03	4.0	9.3
04	6.0	11.3
05	8.0	13.3

K201900L-XX-PT	PBT	K201900HM	K201900W
PART NO	Material	Suitable XKB Housing	Suitable XKB Wafer







DSND	SCALE: N/A	MODEL TYPE: 2.0mm automotive connector
DWN	VIEW:	PART NO.: K201900L-XX-PT
CHKD	UNIT: mm/in	DWG NO.: X-K201900L-XX-PT
APPD	SIZE: A4	WEIGHT SHEET REVISION



XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
ΔX					ANGLAR ±5°
ΔX					L ≤ 4 ±0.2
ΔX					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5

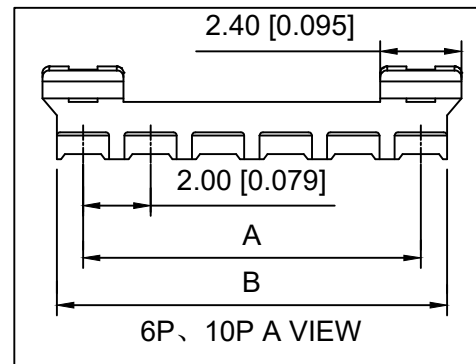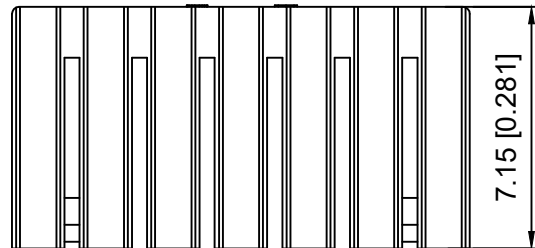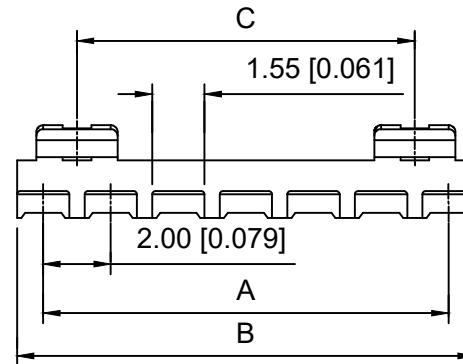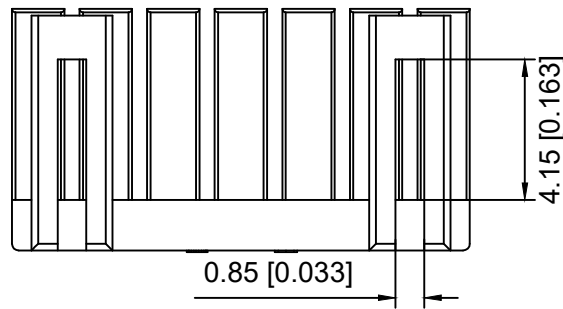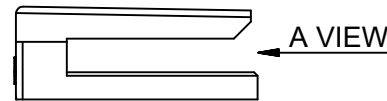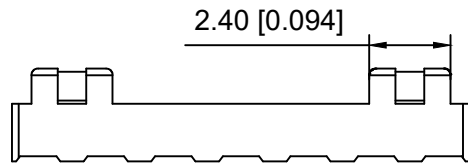

Specification:
 Volatage Rating:250V AC/DC
 Current Rating :3A AC/DC
 Withstaning Voltage:800V AC/Minute
 Temperature Range:-40°~+125°
 Insulation Resistance:≥1000MΩ
 Contact Resistance:≤10MΩ

K 201900 L - XX - 4T
 ① ② ③ ④ ⑤

- 1.K:XKBTEK-Car Connector
- 2.XKB Series No
- 3.Special No:L-Lock catch
- 4.Row No.Pin No:XX-06~15 Pin
- 5.Material:4T-PA4T

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
06	10.00	11.55	10.00	11	20.00	21.55	17.40
07	12.00	13.55	10.00	12	22.00	23.55	17.40
08	14.00	15.55	10.00	13	24.00	25.55	17.40
09	16.00	17.55	12.00	14	26.00	27.55	17.40
10	18.00	19.55	17.40	15	28.00	29.55	17.40

K201900L-XX-4T	PA4T	K201900HM	X2000W
PART NO	Material	Suitable XKB Housing	Suitable XKB Wafer

DSND		SCALE: N/A	MODEL TYPE:
DWN		VIEW:	2.0mm automotive connector
CHKD		UNIT: mm/in	PART NO.:
APPD		SIZE: A4	K201900L-XX-4T
			DWG NO.:
			X-K201900L-XX-4T
		WEIGHT	SHEET
			REVISION
		1/1	A0



XKB INDUSTRIAL PRECISION CO.,LIMITED

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
					ANGLAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
Δx					16 < L ≤ 63 ±0.4
					L > 63 ±0.5