


| REVISIONS |         |          |                  |            |        |
|-----------|---------|----------|------------------|------------|--------|
| REV.      | ECN NO. | LOCATION | DESCRIPTION      | DATE       | DESIGN |
| A0        | N/A     |          | INITIAL RELEASE  | /          | /      |
| A1        | N/A     | (A1)X4   | 产品尺寸变更, 图面升级整理图面 | 2025.05.19 | 阿树     |

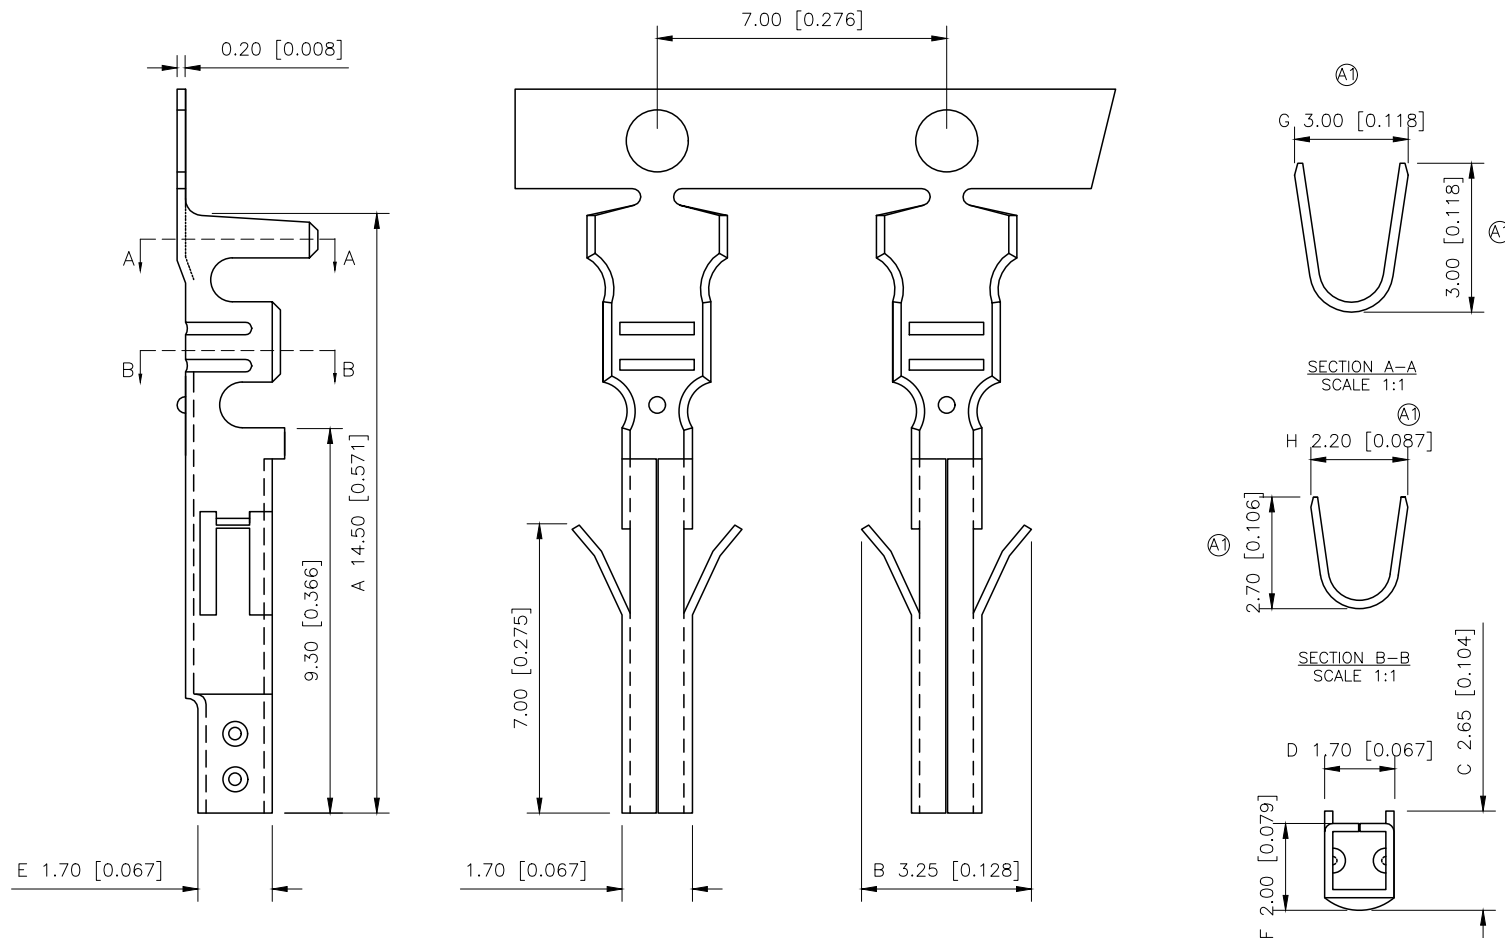

- Specifications
- Voltage rating:250V AC/DC
  - Current rating:7A AC/DC
  - Withstanding voltage:1500V AC/minute
  - Temperature range:-25° to+85°
  - Insulation resistance:≥1000MΩ Min
  - Contact resistance:≤20mΩ Max

PART NO.:

X9357 T F-X SN L  
① ② ③ ④ ⑤ ⑥

- ①Series Number.  
②Category: T-terminal  
③Welding Board Angle: F-Female  
④Material: B-Brass;P-Phosphor bronze  
⑤Plating Category:SN-Bright Tin Plating  
⑥Special No: L-Normal Leads

|               |                 |            |                  |                      |
|---------------|-----------------|------------|------------------|----------------------|
| X9357TF-PSN-L | Phosphor Bronze | AWG#18-20  | Tin Plate80~120U | X9357HM              |
| X9357TF-BSN-L | Brass           |            |                  |                      |
| PART NO       | Material        | Wire Range | Finish           | Suitable XKB Housing |

|                        |       |
|------------------------|-------|
| AuGLAR                 | ±5°   |
| X.                     | ±0.40 |
| X.x                    | ±0.30 |
| X.xx                   | ±0.20 |
| X.xxx                  | ±0.15 |
| UNSPECIFIED TOLERANCES |       |



|          |    |
|----------|----|
| DESIGN   | 阿树 |
| CHECKED  |    |
| APPROVED |    |

|             |                                           |
|-------------|-------------------------------------------|
| VIEW:       | MODEL TYPE: 4.20mm Crimp Style Connectors |
| UNIT: mm/in | PART NO.: X9357TF-XSN-L                   |
| SIZE: A4    | DWG NO.:                                  |