
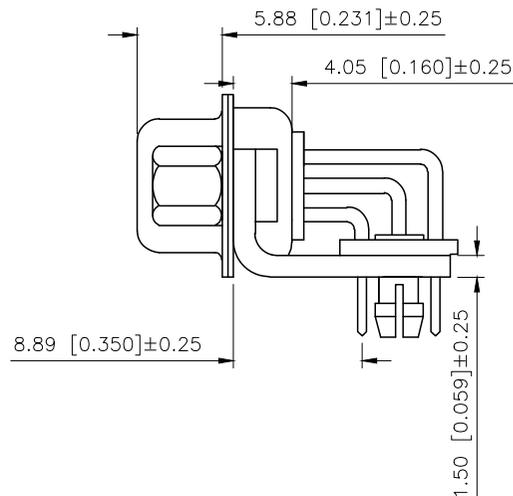


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.12	阿树

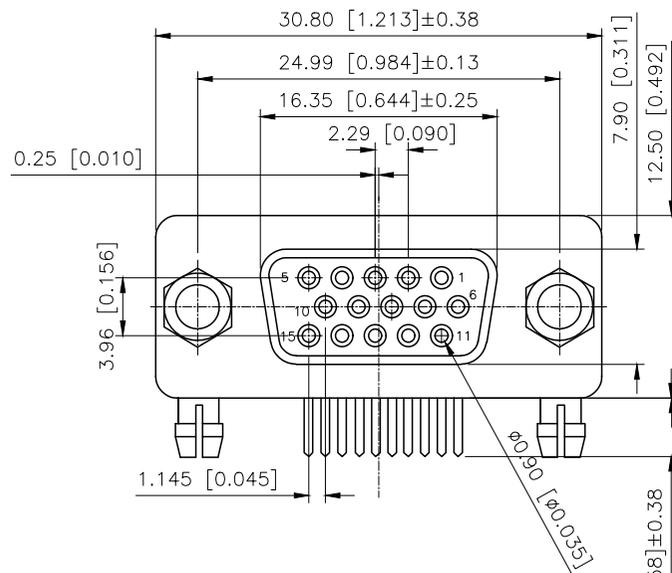

Specifications:

规格:

Current rating:5A AC/DC

额定电流: 5A AC/DC

Voltage rating:500V AC

额定电压: 500V AC

Withstanding voltage:500V AC/MIN

耐受电压: ≥500V AC/分钟

Temperature range:-55°C-+105°C

温度范围: -55°C-+105°C

Insulation resistance:1000MΩMIN

绝缘电阻: ≥1000MΩ

Contact resistance:30mΩMAN

接触电阻: ≤30mΩ

Material And FINISHED:

材料和成本:

INSULATOR:PBT+30% GLASS FILLED UL 94V-0

绝缘体: PBT+30% 玻璃填充 UL 94V-0

SHELL: Steel Plated Tin

外壳: 钢 镀锡



CONTACT MATERIAL:Brass

触点材料: 黄铜

PART NO.:

X06 15 F C X X X
① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:15PIN
- ③Welding Board Angle :F-Female
- ④C: Car-pin
- ⑤Planting Category:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

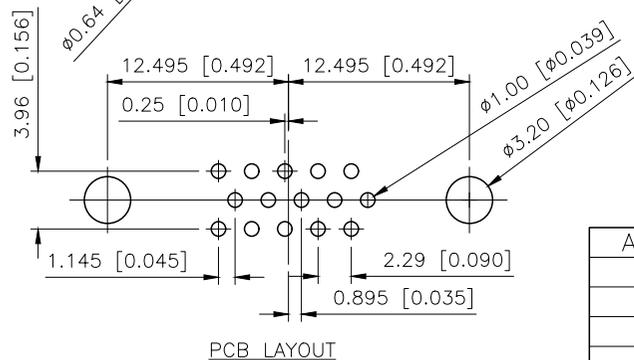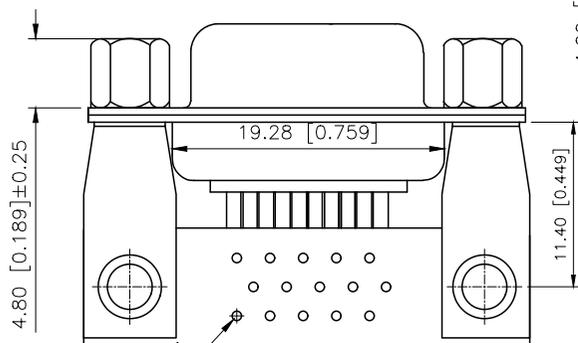

铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	





DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X0615FCXXX
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.12	阿树

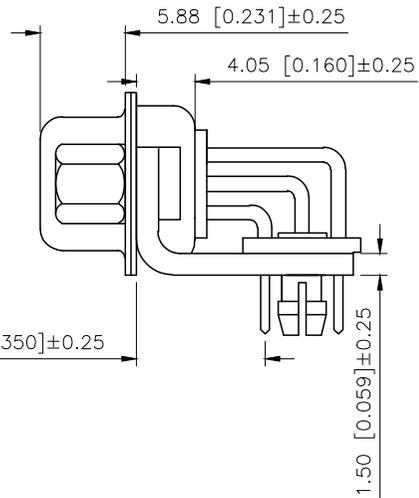
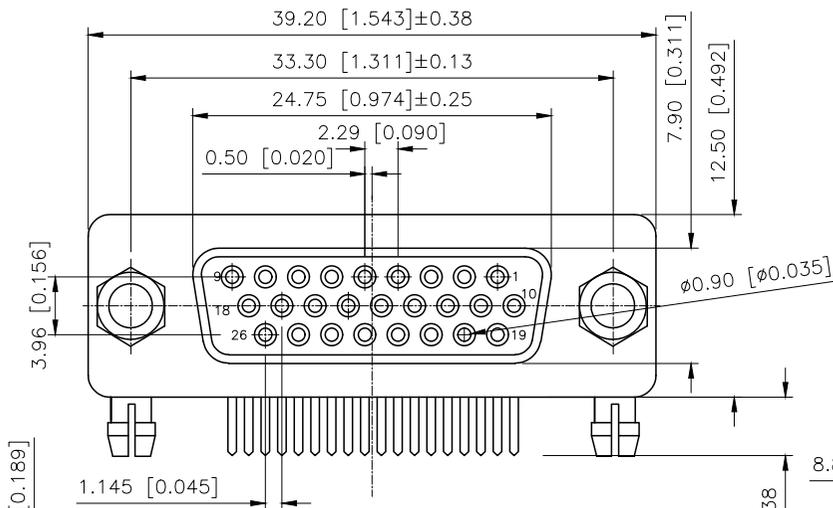


Specifications:
 规格:
 Current rating:5A AC/DC
 额定电流: 5A AC/DC
 Voltage rating:500V AC
 额定电压: 500V AC
 Withstanding voltage:500V AC/MIN
 耐受电压: ≥500V AC/分钟
 Temperature range:-55°C-+105°C
 温度范围: -55°C-+105°C
 Insulation resistance:1000MΩMIN
 绝缘电阻: ≥1000MΩ
 Contact resistance:30mΩMAN
 接触电阻: ≤30mΩ
 Material And FINISHED:
 材料和成本:
 INSULATOR:PBT+30% GLASS FILLED UL 94V-0
 绝缘体: PBT+30% 玻璃填充 UL 94V-0
 SHELL: Steel Plated Tin
 外壳: 钢 镀锡
 CONTACT MATERIAL:Brass
 触点材料: 黄铜

PART NO.:

X06 26 F C X X X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:26PIN
- ③Welding Board Angle :F-Female
- ④C: Car-pin
- ⑤Planting Category:
 1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AuSn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

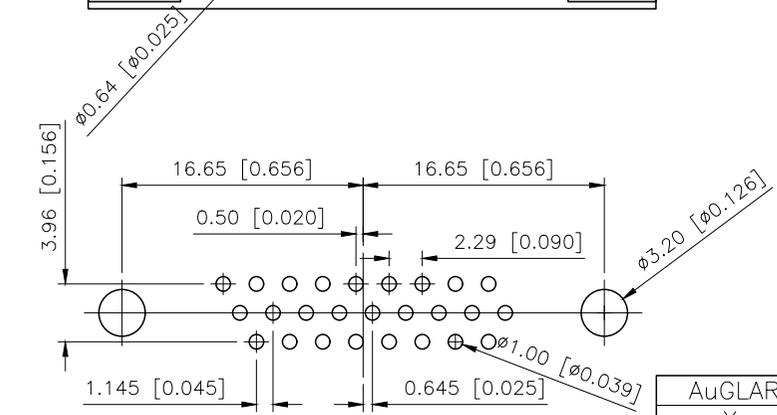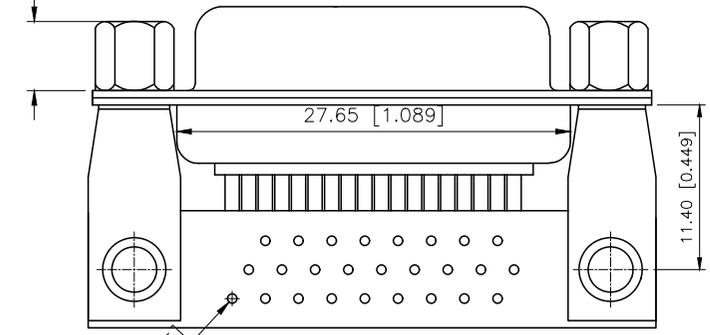

PCB LAYOUT

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树
CHECKED	
APPROVED	

VIEW:	
UNIT:	mm/in
SIZE:	A4



MODEL TYPE:	D-SUB		
PART NO.:	X0626FCXXX		
DWG NO.:			

铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

XKB INDUSTRIAL PRECISION CO., LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.12	阿树

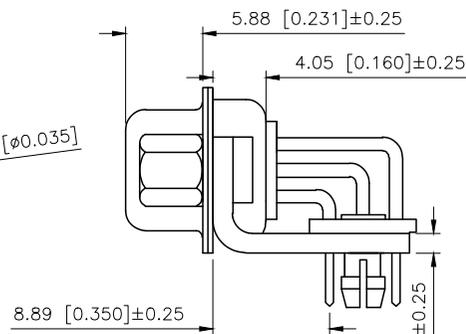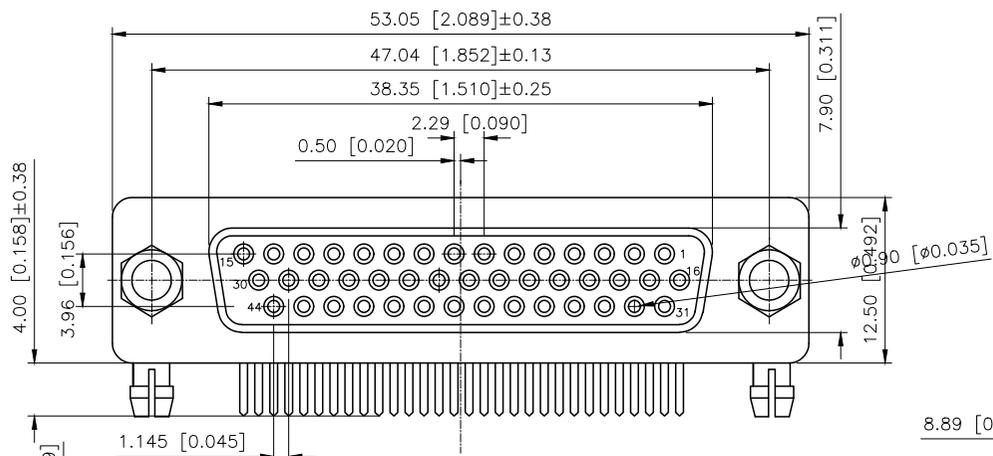

Specifications:



规格:

Current rating:5A AC/DC
 额定电流: 5A AC/DC
 Voltage rating:500V AC
 额定电压: 500V AC
 Withstanding voltage:500V AC/MIN
 耐受电压: ≥500V AC/分钟
 Temperature range: -55°C - +105°C
 温度范围: -55°C - +105°C
 Insulation resistance:1000MΩMIN
 绝缘电阻: ≥1000MΩ
 Contact resistance:30mΩMAN
 接触电阻: ≤30mΩ
 Material And FINISHED:
 材料和成本:
 INSULATOR:PBT+30% GLASS FILLED UL 94V-0
 绝缘体: PBT+30% 玻璃填充 UL 94V-0
 SHELL: Steel Plated Tin
 外壳: 钢 镀锡
 CONTACT MATERIAL:Brass
 触点材料: 黄铜

PART NO.:

X06 44 F C X X X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:44PIN
- ③Welding Board Angle :F-Female
- ④C: Car-pin
- ⑤Planting Category:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AU Sn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

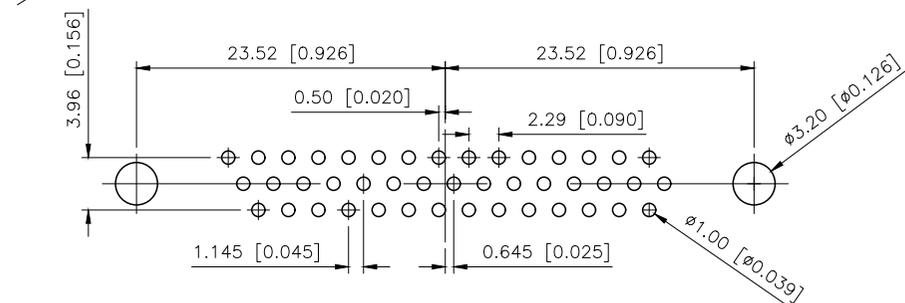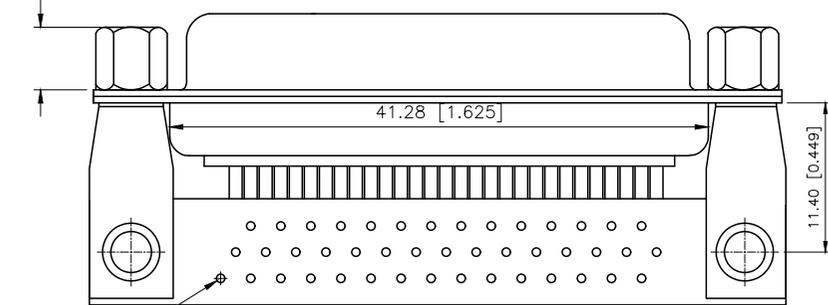

PCB LAYOUT



铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	




DESIGN	阿树	VIEW:	MODEL TYPE: D-SUB
CHECKED		UNIT: mm/in	PART NO.: X0644FCXXX
APPROVED		SIZE: A4	DWG NO.:

REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		独立各PIN数图纸, 增加开孔定位尺寸	2024.12.12	阿树

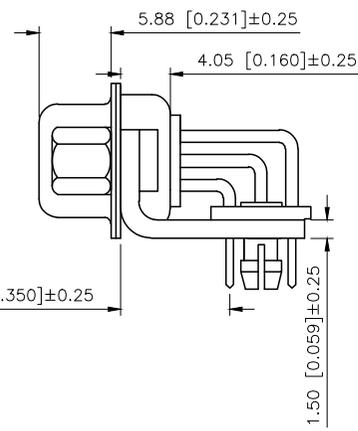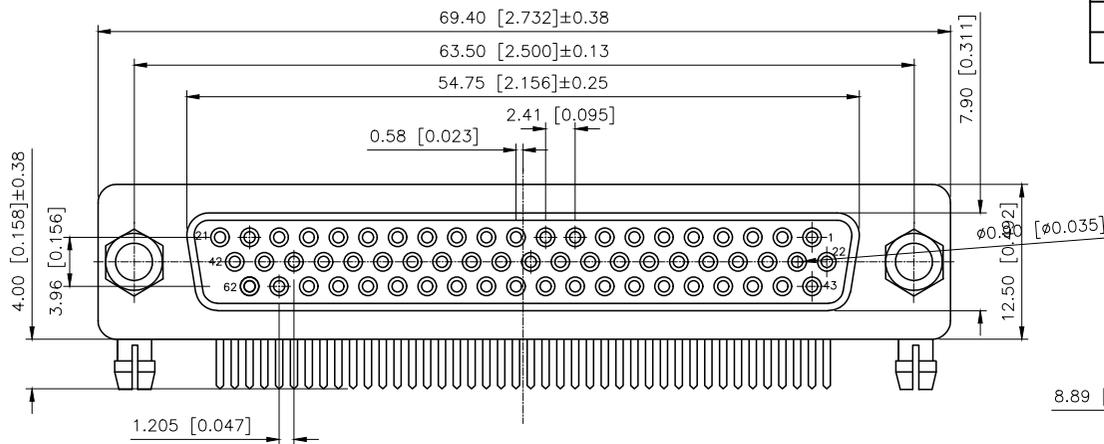


Specifications:
 规格:
 Current rating:5A AC/DC
 额定电流: 5A AC/DC
 Voltage rating:500V AC
 额定电压: 500V AC
 Withstanding voltage:500V AC/MIN
 耐受电压: ≥500V AC/分钟
 Temperature range:-55°C--+105°C
 温度范围: -55°C--+105°C
 Insulation resistance:1000MΩMIN
 绝缘电阻: ≥1000MΩ
 Contact resistance:30mΩMAN
 接触电阻:≤30mΩ
 Material And FINISHED:
 材料和成本:
 INSULATOR:PBT+30% GLASS FILLED UL 94V-0
 绝缘体: PBT+30% 玻璃填充 UL 94V-0
 SHELL: Steel Plated Tin
 外壳: 钢 镀锡
 CONTACT MATERIAL:Brass
 触点材料: 黄铜

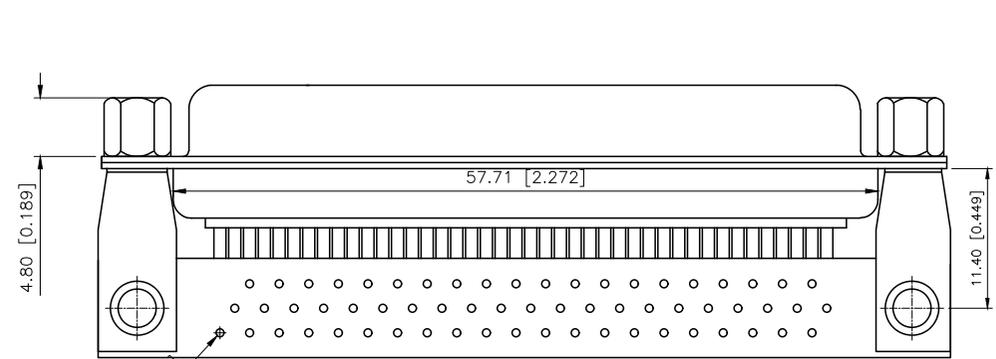

PART NO.:

X06 62 F C X X X
 ① ② ③ ④ ⑤ ⑥ ⑦

- ①Series No
- ②Pin No.:62PIN
- ③Welding Board Angle :F-Female
- ④C: Car-pin
- ⑤Planting Category:
1:1U 2:2U 3:3U 4:5U 5:15U 6:30U 7:AU Sn
- ⑥B:Black W:White BL:Blue Y:Yellow G:Green R:Red
- ⑦1:TYPE-1; 2:TYPE-2

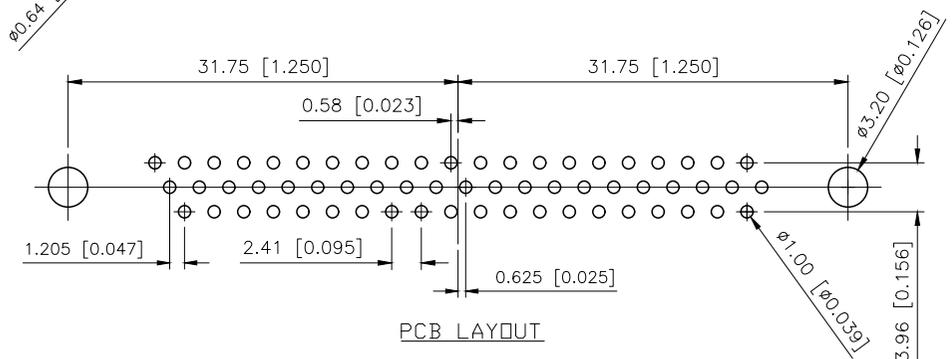

PCB LAYOUT

铆合方式	TYPE-1: 铆合	TYPE-2: 铆合锁螺丝
图式		

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE:	D-SUB
CHECKED		UNIT:	mm/in	PART NO.:	X0662FCXXX
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO., LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1