
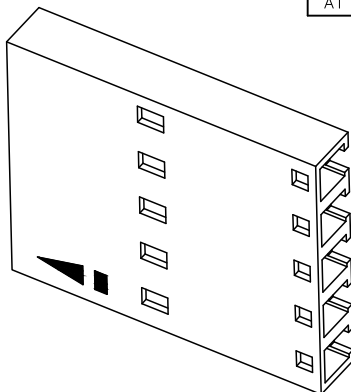


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.18	阿树

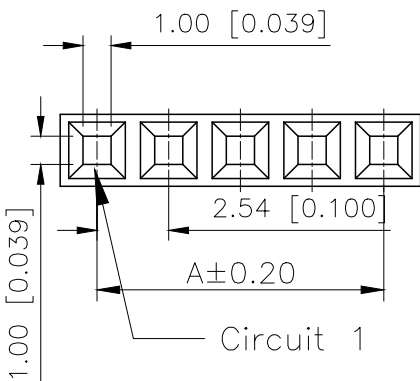



■SPECIFICATIONS

- Voltage rating:250V AC/DC
- Current rating:3A AC/DC
- Withstanding Voltage:1500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥1000MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤30mΩ


PART NO.:

X9556 H-XX-N0 XX
① ② ③ ④ ⑤

- ①Series No
- ②Category:H-HSG
- ③Row No.Pin No:XX-02~15P
- ④Material:N0-PA66 UL94V-0
- ⑤Color:Blank-Natural Color

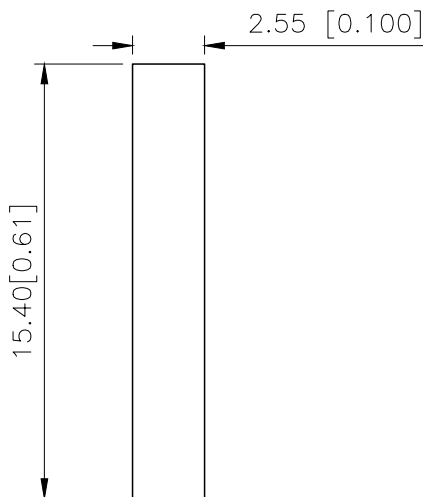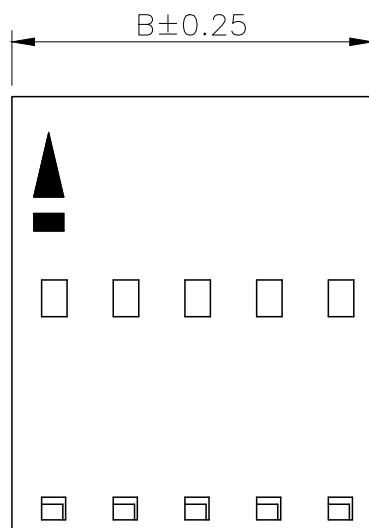

Poles	Dimensions(mm)		Poles	Dimensions(mm)	
	A	B		A	B
02	2.54	5.15	09	20.32	22.93
03	5.08	7.69	10	22.86	25.47
04	7.62	10.23	11	25.40	28.01
05	10.16	12.77	12	27.94	30.55
06	12.70	15.31	13	30.48	33.09
07	15.24	17.85	14	33.02	35.63
08	17.78	20.39	15	35.56	38.17



X9556H-XX-N0	PA66 UL 94V-0	X9556T	X9556W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:		MODEL TYPE:	2.54mm Crimp Style Connector
CHECKED		UNIT:	mm/in	PART NO.:	X9556H-XX-N0
APPROVED		SIZE:	A4	DWG NO.:	

XKB INDUSTRIAL PRECISION CO.,LIMITED

SCALE	PAGE	REVISION
N/A	1/1	A1