
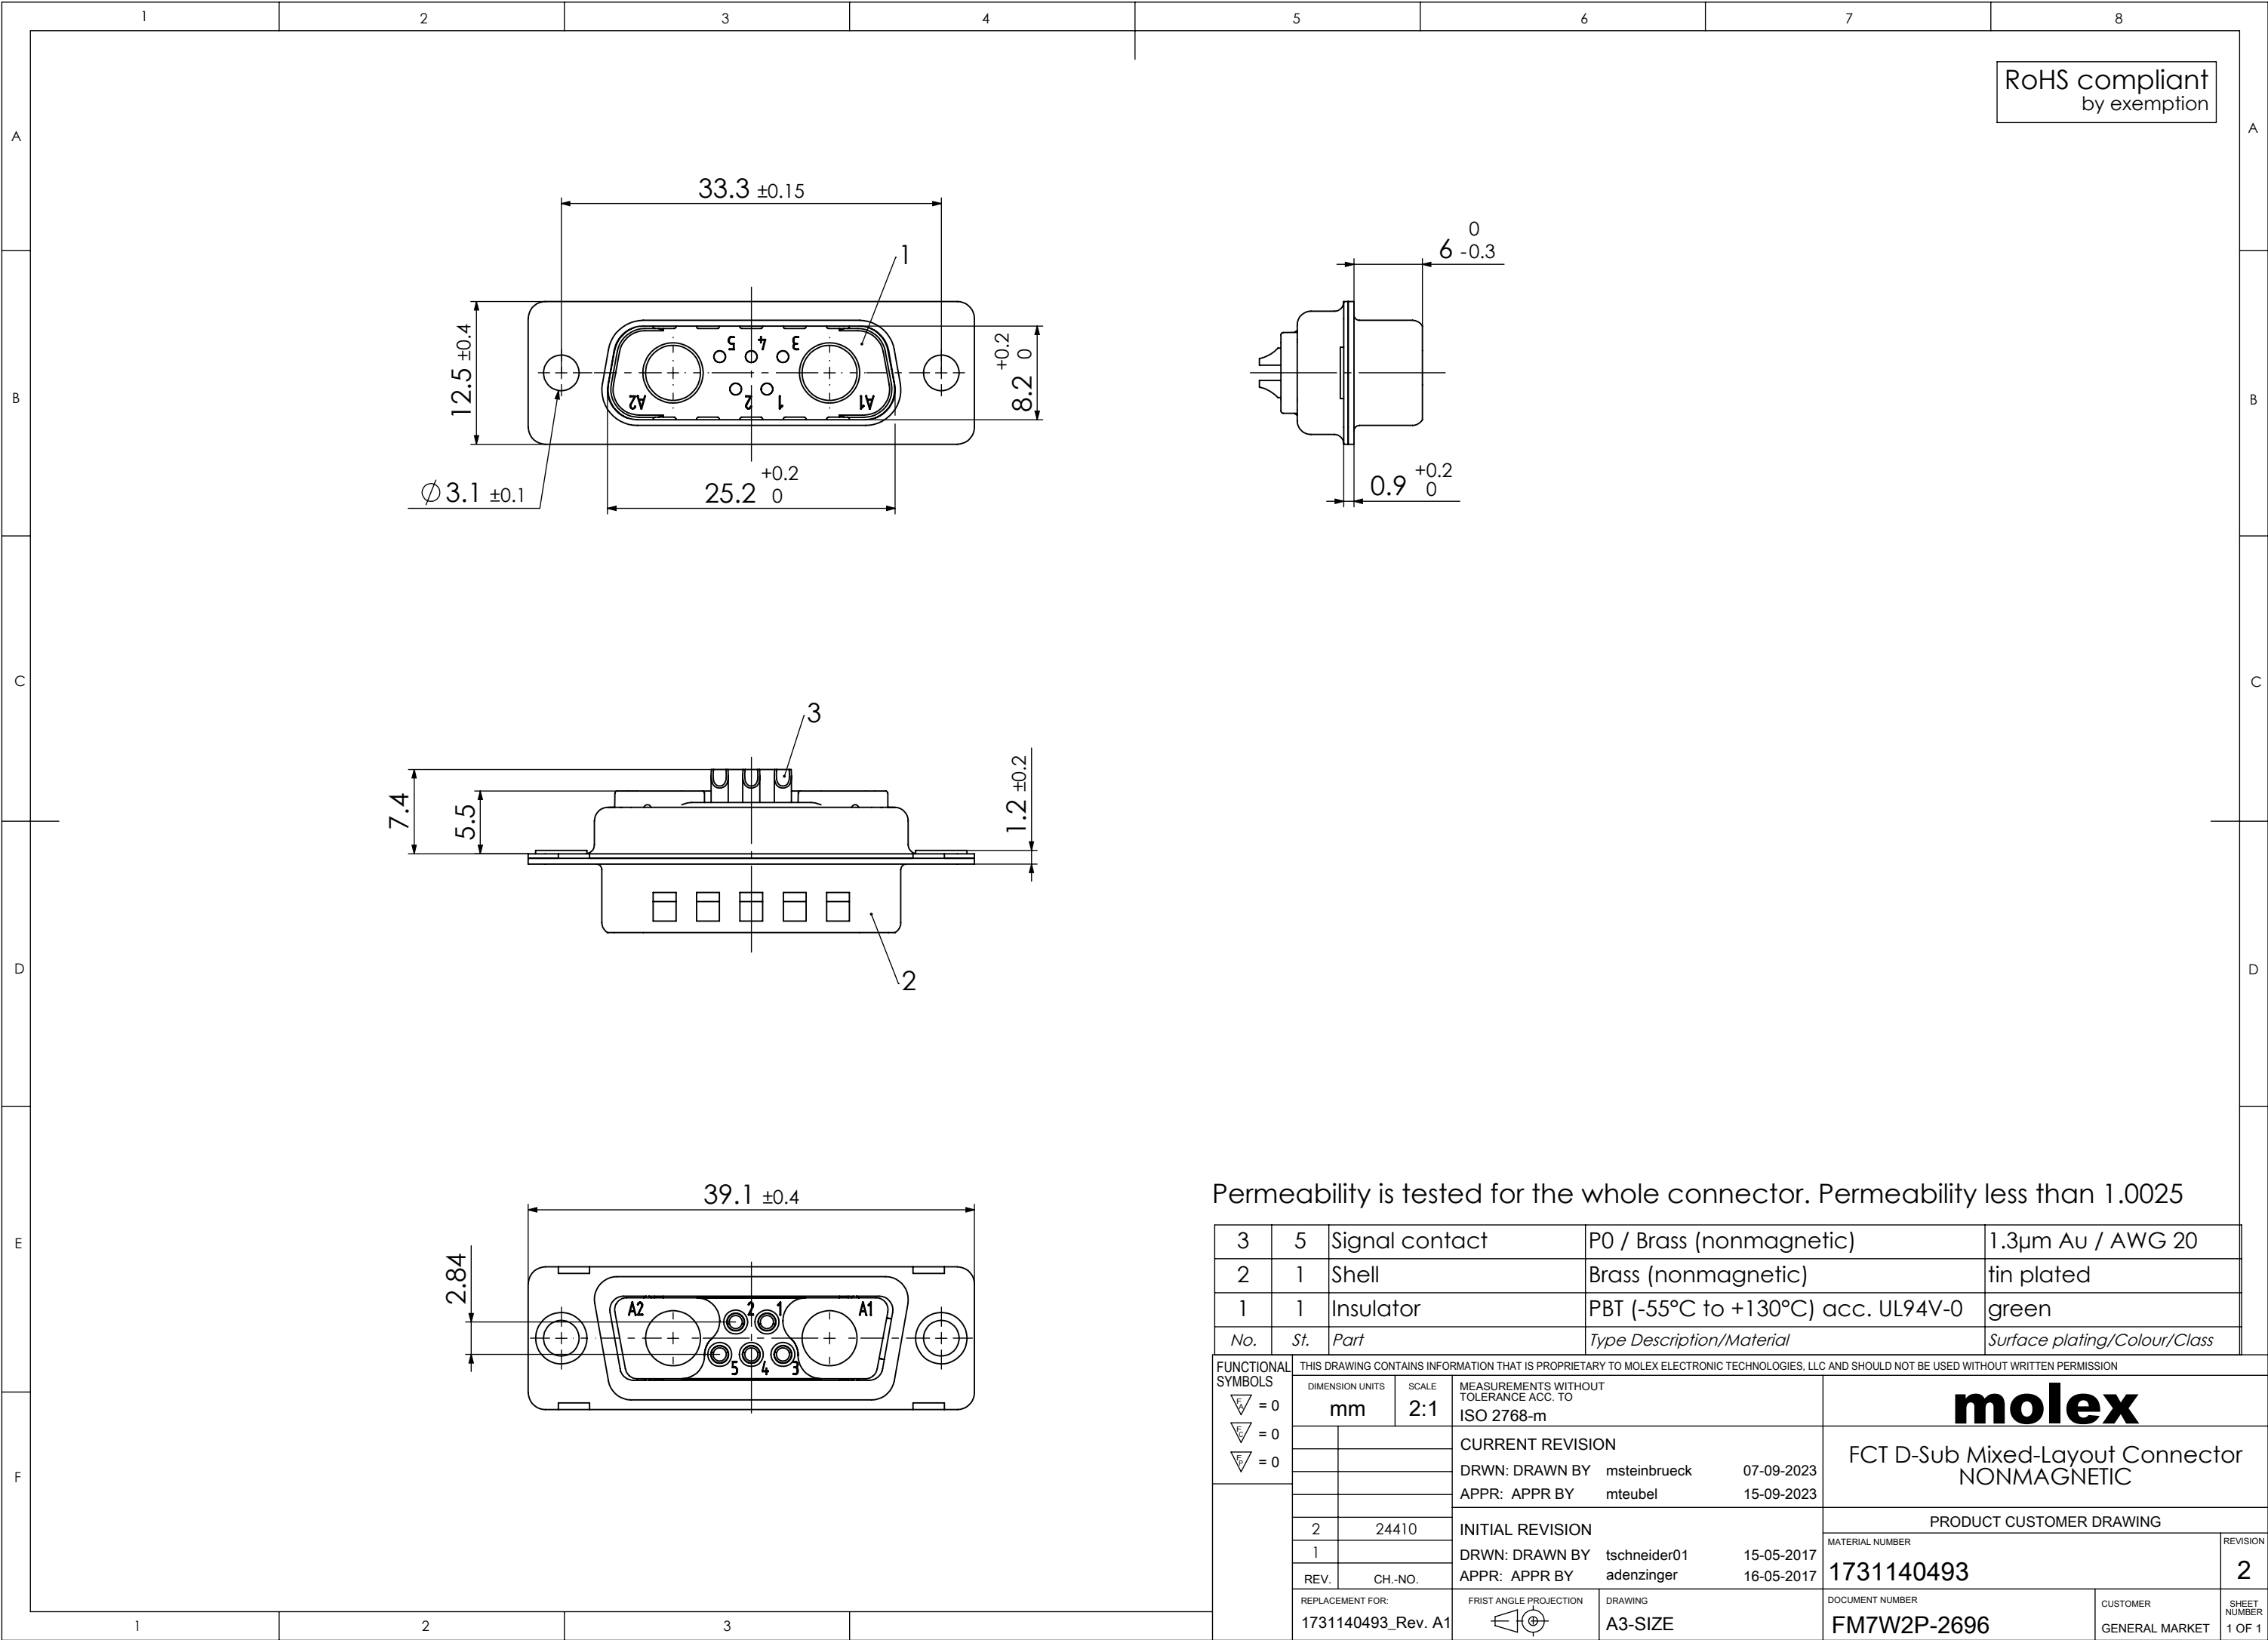


COMMENT:
ALL RIGHTS ARE RESERVED BY US FOR THIS DRAWING. WITHOUT OUR PRIOR CONSENT,
IT MAY NEITHER BE DUBICATED NOR MADE AVAILABLE TO A THIRD PARTY.
AND IT ALSO MAY NOT BE IMPROPERLY USED BY TE RECEIVER, OR A THIRD PARTY.



Permeability is tested for the whole connector. Permeability less than 1.0025

3	5	Signal contact	P0 / Brass (nonmagnetic)	1.3µm Au / AWG 20		
2	1	Shell	Brass (nonmagnetic)	tin plated		
1	1	Insulator	PBT (-55°C to +130°C) acc. UL94V-0	green		
No.	St.	Part	Type Description/Material	Surface plating/Colour/Class		
THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						
FUNCTIONAL SYMBOLS <div>▽ = 0</div> <div>▽ = 0</div> <div>▽ = 0</div>	DIMENSION UNITS		SCALE	MEASUREMENTS WITHOUT TOLERANCE ACC. TO ISO 2768-m	<div>molex</div> <div>FCT D-Sub Mixed-Layout Connector NONMAGNETIC</div>	
	mm		2:1			
				CURRENT REVISION		
				DRWN: DRAWN BY msteinbrueck 07-09-2023 APPR: APPR BY mteubel 15-09-2023		
					PRODUCT CUSTOMER DRAWING	
	2 24410		INITIAL REVISION		MATERIAL NUMBER <div>1731140493</div>	
	1		DRWN: DRAWN BY tschneider01 15-05-2017 APPR: APPR BY adenzinger 16-05-2017			
	REV. CH.-NO.					
	REPLACEMENT FOR: 1731140493_Rev. A1		FRIST ANGLE PROJECTION <div></div>	DRAWING A3-SIZE	DOCUMENT NUMBER FM7W2P-2696	CUSTOMER GENERAL MARKET