

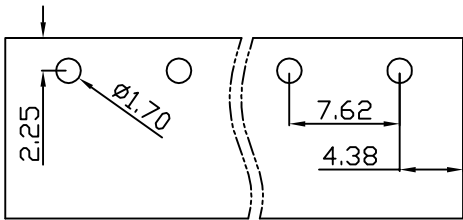

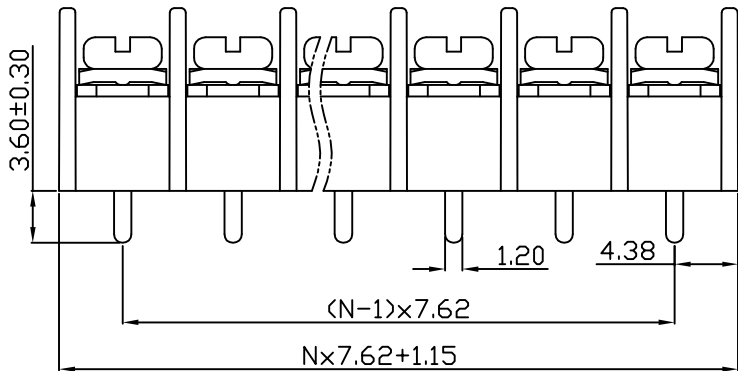


linear dimension(Tolerances Standard GB/T 14486-2008)								—		
variable range	to	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60



PCB Layout

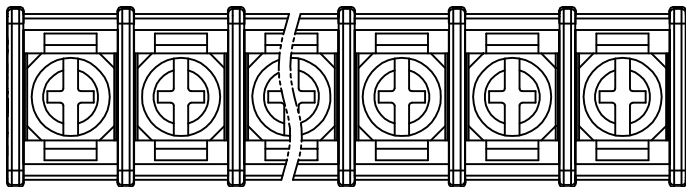

DBT10 — 7.62 — XXP — C — S/P
(Series No.) (Pitch) (Poles) Slotted/Phillips

(Color):GN:(Green), BK:(Black), BU:(Blue), RD:(Red), GY:(Gray)
OG:(Orange), WT:(White), YL:(Yellow), CR:(Clear)

APPD: JTING Chen 2022.11.26

CHKD: Duck Mao 2022.11.26

DRFT: Steven Lu 2022.11.26


UL/CUL 技术参数					
UL/CUL Technical Data					
等级	Use Group		B	C	D
额定电压	Rated Voltage	[V]	300	-	-
额定电流	Rated Current	[A]	20	-	-
接线范围	Wire Range		22-12		
单/多芯线	Solid/Stranded	[AWG]			
IEC 技术参数					
IEC Technical Data					
额定电压	Rated Voltage	[V]	450		
额定电流	Rated Current	[A]	24		
耐电压	Withstanding Voltage	[AWG]	2000V/1Min		
导线截面积	Conductor cross section		2.5		
硬质/柔性导线	Solid/ flexible	[mm²]			
材 料					
绝缘材料	Insulation Material				
阻燃等级	Imflamability				
导体材料	Contact Material				
导体表面镀层	Contactive Coating				
一般参数					
间距	Pitch	[mm]			
极数	Poles	[P]			
螺丝	Screw/扭矩	Torque(Max)			
工作温度	Operating temperatur	[°C]			
引针尺寸	Pin Dimensions	[mm]			
PCB板孔径	PCB Hole Diameter	[mm]			

DORABO

宁波地博电气有限公司
Ningbo Dorabo Electric CO., Ltd

NAME:

DBT10-7.62-XXP-C-P



SIZE: A4

mm
(inch)

REV

T0-1

TYPE: CUSTOMER_DRAWING

SCALE: 1:1

SHEET

1/1