

# Type FSW

## Fast Acting Glass Tube Fuse

### Automotive Glass



www.optifuse.com (619) 593-5050

**Fuse Size:** 1/4" x 7/8" (6.3 x 22.2mm)


**Ampere Rating:** 100mA ~ 30A

**Voltage Rating:** 125V / 32V

**Electrical Characteristics:**

100%	135%	200%
Min.	Max.	Max.
4h	1h	120s

**Mechanical Dimensions: Inches[mm]**

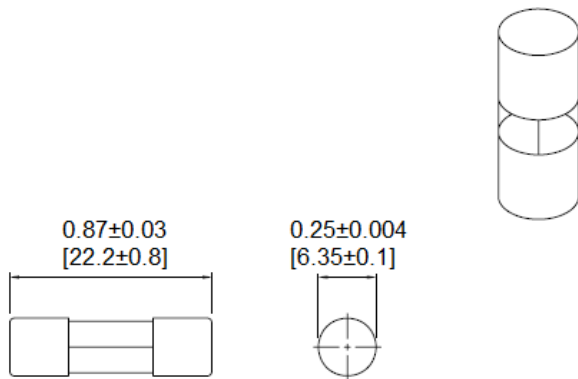

Part Number	Ampere Rating	Interrupt Rating	Voltage Rating
FSW-100mA	100mA	10KA @125VAC	125V
FSW-125mA	125mA		
FSW-160mA	160mA		
FSW-200mA	200mA		
FSW-250mA	250mA		
FSW-300mA	300mA		
FSW-315mA	315mA		
FSW-400mA	400mA		
FSW-500mA	500mA		
FSW-600mA	600mA		
FSW-630mA	630mA		
FSW-700mA	700mA		
FSW-800mA	800mA		
FSW-1A	1A		
FSW-1.25A	1.25A		
FSW-1.5A	1.5A		
FSW-1.6A	1.6A		
FSW-2A	2A	200A @125VAC	125V
FSW-2.5A	2.5A		
FSW-3A	3A		
FSW-3.15A	3.15A		
FSW-3.5A	3.5A		
FSW-4A	4A		
FSW-5A	5A	1000A @32VAC,VDC	32V
FSW-6A	6A		
FSW-6.3A	6.3A		
FSW-7A	7A		
FSW-8A	8A		
FSW-10A	10A		
FSW-12A	12A		
FSW-13A	13A		
FSW-15A	15A		
FSW-16A	16A		
FSW-20A	20A		
FSW-25A	25A		
FSW-30A	30A		

<p><b>Warning:</b></p>	-Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
	-Avoid contact of Fuse device with chemical solvent. Prolonged contact may damage the device performance.