
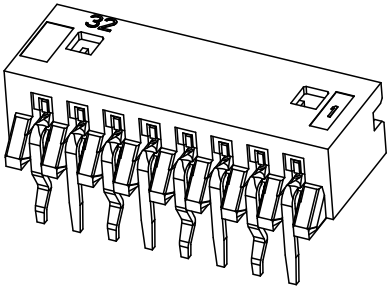


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.09	阿树



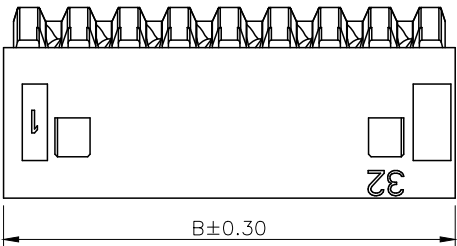


- SPECIFICATIONS
- Voltage rating:250V AC/DC
 - Current rating:2A AC/DC
 - Withstanding Voltage:1000V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥1000MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤30mΩ

PART NO.:

X2012 W R-XX-NO SN
① ② ③ ④ ⑤ ⑥

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Straight 90°
④Row No.Pin No:XX-02~15Pin
⑤Material: N0-PA66 UL94V-0
⑥Planting:SN-Tin Plated

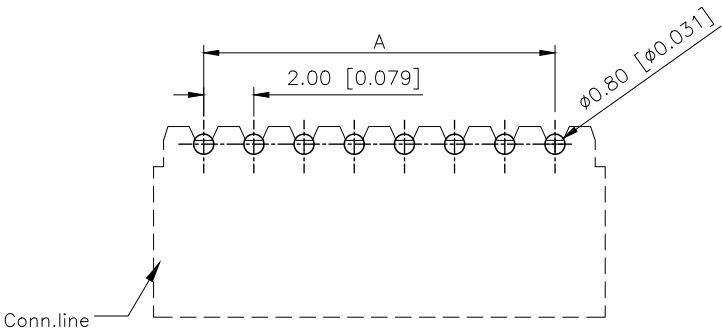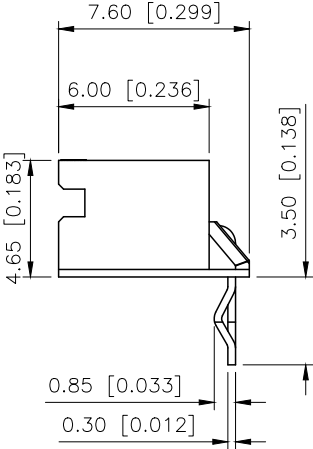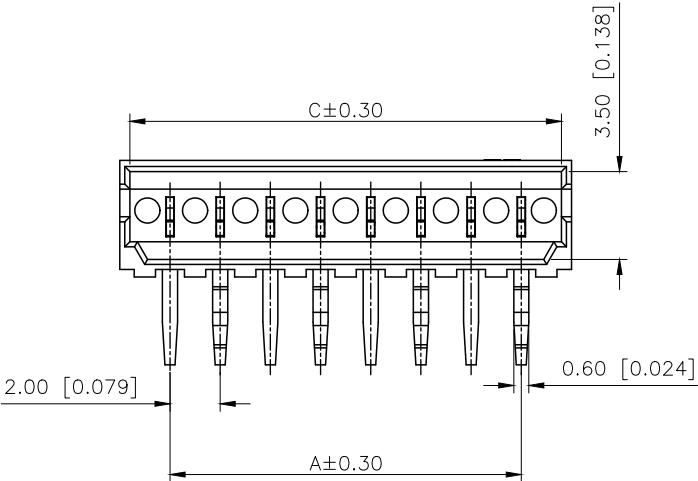

Recommended P.C.B Layout
General Tolerance±0.05

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	2.00	6.00	5.10	09	16.00	20.00	19.10
03	4.00	8.00	7.10	10	18.00	22.00	21.10
04	6.00	10.00	9.10	11	20.00	24.00	23.10
05	8.00	12.00	11.10	12	22.00	26.00	25.10
06	10.00	14.00	13.10	13	24.00	28.00	27.10
07	12.00	16.00	15.10	14	26.00	30.00	29.10
08	14.00	18.00	17.10	15	28.00	32.00	31.10

X2012WR-XX-N0SN	Nyoln 66 UL 94V-0	Brass	Tin-Plated	X2012H
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERAuces	



DESIGN	阿树	VIEW:		MODEL TYPE: 2.00mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X2012WR-XX-N0SN
APPROVED		SIZE:	A4	DWG NO.: