

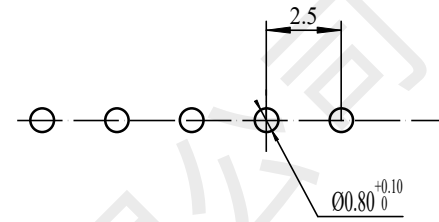
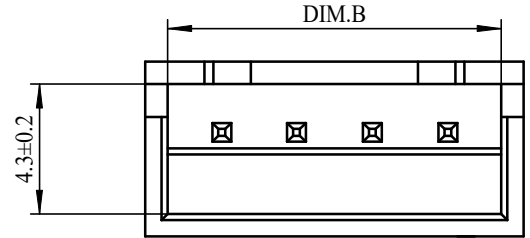
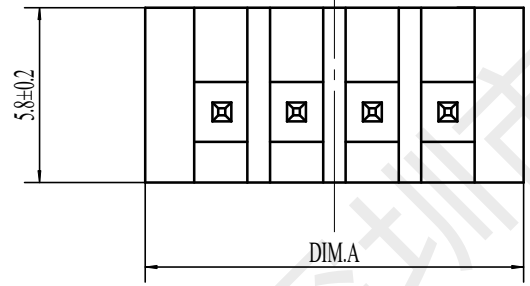
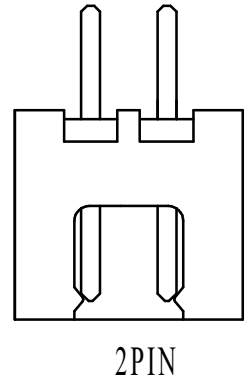


| REV. | EC# | DESCRIPTION | DATE | DRAWN | CHECK | APPROVED |
|------|-----|-------------|-----------|-------|-------|----------|
| 1.00 | | 初版发行 | 2020-8-28 | | | |
| | | | | | | |
| | | | | | | |

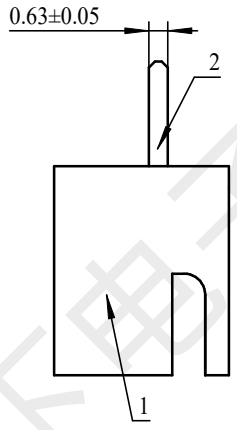

| NUMBER OF PINS | DIM.A | DIM.B | DIM.C |
|----------------|-------|-------|-------|
| 15P | 40 | 38.6 | 35 |
| 14P | 37.5 | 36.1 | 32.5 |
| 13P | 35 | 33.6 | 30 |
| 12P | 32.5 | 31.1 | 27.5 |
| 11P | 30 | 28.6 | 25 |
| 10P | 27.5 | 26.1 | 22.5 |
| 9P | 25 | 23.6 | 20 |
| 8P | 22.5 | 21.1 | 17.5 |
| 7P | 20 | 18.6 | 15 |
| 6P | 17.5 | 16.1 | 12.5 |
| 5P | 15 | 13.6 | 10 |
| 4P | 12.5 | 11.1 | 7.5 |
| 3P | 10 | 8.6 | 5 |
| 2P | 7.5 | 6.1 | 2.5 |

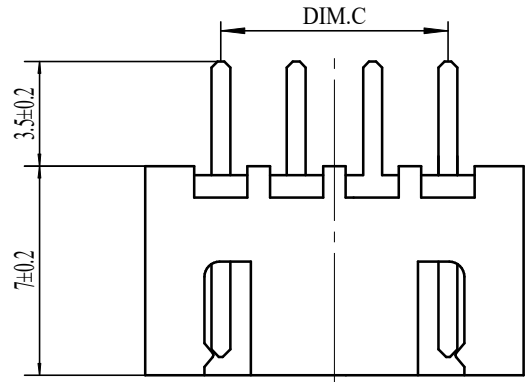

适应基板厚度: 1.2mm~1.6mm
 温度范围: -25℃~85℃
 额定电压: 250V AC/DC
 额定电流: 3A
 接触电阻: $\leq 0.02 \Omega$
 绝缘电阻: $\geq 100M \Omega$
 耐压: 1000V AC/minute

技术要求:

- 1) 材质:见附表;
- 2) 电镀:见附表;
- 3) 塑件表面平整、光洁、无毛刺、气泡、烧焦、变形、浇口无拉伤、多料或缺料等不良现象;
- 4) 端子表面无氧化、电镀不良等现象。

| | | | |
|-----|---------|-------|------------------------|
| 2 | PIN | n PCS | 材质:黄铜,电镀:镀亮锡60u"MIN |
| 1 | Housing | 1 PCS | 材质:PA66(UL94V-0),颜色:白色 |
| NO. | NAME | Q'TY | DESCRIPTION |

韩下 HANXIA 深圳市韩下电子有限公司

| | | | | | | |
|------------------|-----|-----------|-----------|-------------|------------|----------------|
| DRAW : | 黄彬 | 2020-8-28 | TITLE: | 插件针座 | DRAW NAME: | HX XH2.54-2PZZ |
| DESIGN: | | | SERIES: | 1501 SERIES | DRAW NO. | |
| CHECK: | 张伟 | 2020-8-28 | P/N: | | UNIT: | mm |
| APPROVED | 罗小春 | 2020-8-28 | REV. 1.00 | SCALE N/A | SHEET: | 1/1 |
| CUSTOMER DRAWING | | | | | | |

| GENERAL TOLERANCES | | | |
|--------------------|------------|--------|------------------|
| DIM | TOL | DIM | DEG |
| X | | X° | $\pm 3.00^\circ$ |
| X.X | ± 0.35 | X.X° | $\pm 2.00^\circ$ |
| X.XX | ± 0.25 | X.XX° | $\pm 1.00^\circ$ |
| X.XXX | ± 0.15 | X.XXX° | |