





REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.04	阿树

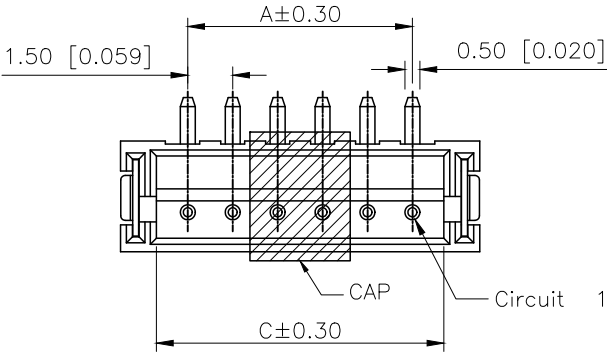

PART NO.:

X1502 W V S-XX-XX SN
① ② ③ ④ ⑤ ⑥ ⑦


- ①Series No
②Category:W-Wafer
③Welding Board Angle:V-Stright 180°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~15Pin
⑥Material: 9T-PA9T;6T-PA6T;
LP-LCP 94V-0
⑦Planting Categoty:SN-Bright tin plating

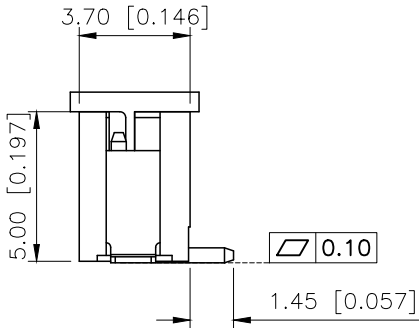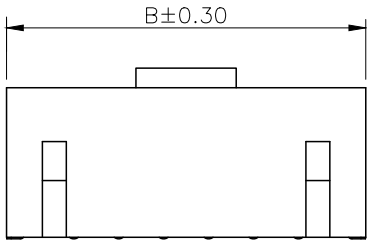

■SPECIFICATIONS

- Voltage rating:50V AC/DC
- Current rating:1A AC/DC
- Withstanding Voltage:500V AC/minute
- Temperature range:-40°C~+125°C
- Insulation resistance:≥500MΩ
- Contact resistance:≤20mΩ
- After environmental testing:≤30mΩ

Poles	Dimensions(mm)			Poles	Dimensions(mm)		
	A	B	C		A	B	C
02	1.50	6.00	3.60	09	12.00	16.50	14.10
03	3.00	7.50	5.10	10	13.50	18.00	15.60
04	4.50	9.00	6.60	11	15.00	19.50	17.10
05	6.00	10.50	8.10	12	16.50	21.00	18.60
06	7.50	12.00	9.60	13	18.00	22.50	20.10
07	9.00	13.50	11.10	14	19.50	24.00	21.60
08	10.50	15.00	12.60	15	21.00	25.50	23.10

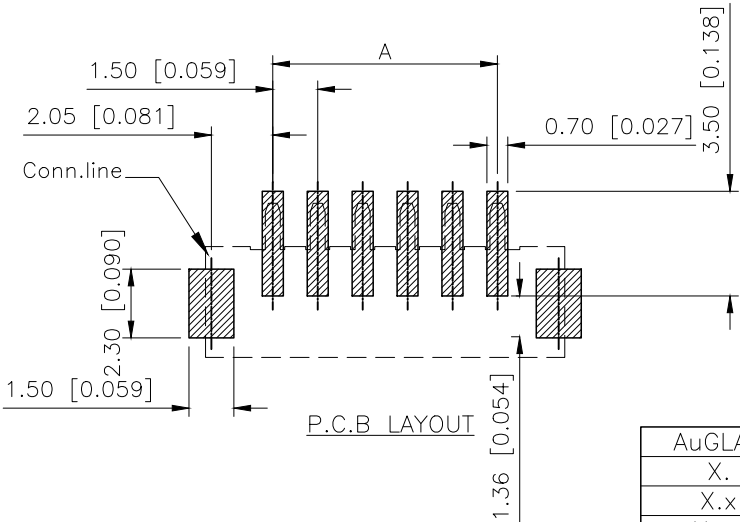

X1502WVS-XXHF-LPSW	LCP UL 94V-0 Halogen Free			
X1502WVS-XX-6TSN	PA6T UL 94V-0	Brass	Tin-Plated	X1502H
X1502WVS-XX-9TSN	PA9T UL 94V-0			
PART NO	Material	Material(pin)	Finish(pin)	Suitable XKB Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:		MODEL TYPE: 1.50mm Crimp Style Connectors
CHECKED		UNIT:	mm/in	PART NO.: X1502WVS-XX-9TSN
APPROVED		SIZE:	A4	DWG NO.: