




TOP VIEW





RIGHT SIDE VIEW




BACK VIEW



LEFT SIDE VIEW

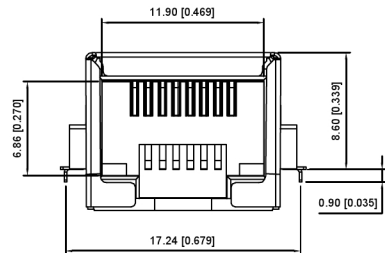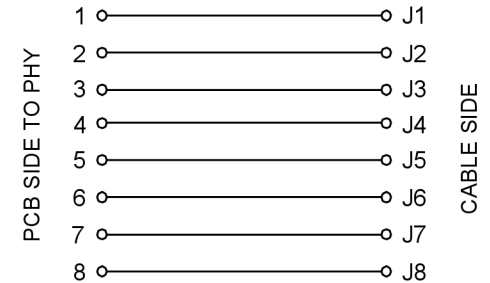


FRONT VIEW

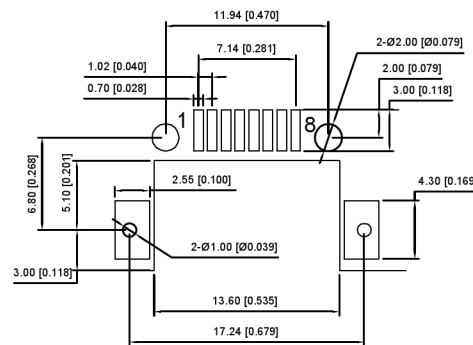

RECOMMENDED PCB LAYOUT VIEWED FROM COMPONENT SIDE

XKB Connectivity

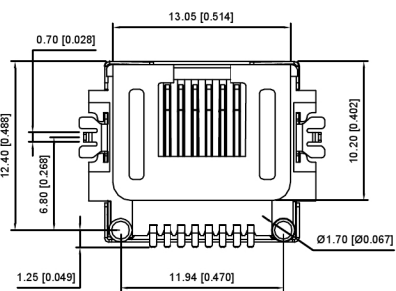

BOTTOM VIEW

**MATERIAL 材料:**

HOUSING 外壳: LCP,UL94V-0,BLACK.  
 TERMINAL 端子: PHOSPHOR BRONZE, Ø=0.35MM,  
 GOLD PLATING ON CONTACT AREA.  
 SHIELD:C2680,T=0.20MM,20U" MIN NICKEL PLATING  
 ON ALL AREA.

**MECHANICAL 机械:**

DURABILITY 耐用性: 750 CYCLES MIN.12.5MM/MINUTE  
 INSERTION FORCE 插入力: 2.2KG.F MAX  
 RETENTION STRENGTH 固位力:7.7KG.F BETWEEN JACK AND PLUG  
 OPERATING TEMPERATURE 工作温度: -40°C~+85°C.  
 STORAGE TEMPERATURE 储存温度: -40°C~+85°C.  
 ALL CRITICAL DIMENSIONS WITH "M"

**ELECTRICAL 电动:**

VOLTAGE 电压:125 VOLTS AC  
 CURRENT RATING 额定电流:1.5AMP  
 DIELECTRIC STRENGTH 介电强度:1000 VAC RMS 50HZ OR 60HZ,1MIN  
 INSULATION RESISTANCE 绝缘电阻:500 MEGA OHMS MIN.INITIAL  
 AFTER 500V DC FOR 1 MINUTE  
 CONTACT RESISTANCE 接触电阻:SINGLE TERMINAL 30 MILLIOHMS MAX  
 INITIAL 50 MILLIOHMS MAX.AFTER  
 DURABILITY TEST

广东星坤科技股份有限公司

△X	日期
△X	日期
△X	日期
MARK	DESCRIPTION

文件工程章

					ANGLAR	±5°
					L ≤ 4	±0.2
					4 < L ≤ 16	±0.3
					16 < L ≤ 63	±0.4
					L > 63	±0.5
					UNSPECIFIED TOLERANCES	

www.helloxkb.com www.helloxkb.cn www.xk-dg.cn

DSND		SCALE: N/A	MODEL TYPE: RJ JACK
DWN		VIEW:	PART NO.:
CHKD		UNIT: mm/in	DWG NO.:
APPD		SIZE: A4	X38ADGWA6SB1075
		WEIGHT	SHEET
		1/1	REVISION A0

XKB INDUSTRIAL PRECISION CO.,LIMITED