



Copyright FCI.

PRODUCT DESCRIPTION CODE :

10131937-YXXXLF

PLATING :
RoHS COMPATIBLE, SEE NOTE 3
PACKAGING : "A" : TAPE & REEL
"U" : TUBE
TOTAL NUMBER OF POSITIONS 04 TO 50



- 1 = 0.76 µm GOLD ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 2 = 0.38µm GOLD ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 3 = 0.20µm GOLD ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 4 = 0.76 µm GXT ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 5 = 0.38µm GXT ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 6 = 0.20µm GXT ON CONTACT AREA
2.54µm MIN MATTE TIN ON TAIL
- 9 = 2.54µm MIN MATTE TIN FULL PLATED
- 1.27µm NICKEL MIN UNDERLAYER

NOTES :


1- MATERIAL
HOUSING : HIGH TEMPERATURE GLASS FILLED FLAME
RETARDANT PER UL 94 V-0
TERMINAL: COPPER ALLOY

2- TO DETERMINE DIMENSIONS :
N = NUMBER OF POSITIONS PER ROW
EXAMPLE : 8 POS N x 2 = 16mm
UP TO N = 24 TOLERANCE : 0
FROM N = 26 TOLERANCE : 0.05
-0.10

3 - RoHS COMPATIBLE PRODUCT SPECIFICATIONS
a - PLATING :
"LF" MEANS THE PRODUCT IS LEAD-FREE, 2µm MINIMUM
MATTE TIN OVER 1.27µm MINIMUM NICKEL UNDERPLATE
b - MANUFACTURING PROCESS COMPATIBILITY
THE HOUSING WILL WITHSTAND EXPOSURE TO 260°C PEAK
TEMPERATURE FOR 30 SECONDS MAX IN A CONVECTION,
INFRA-RED OR VAPOR PHASE OR REFLOW OVEN
c - LABELLING :
MEETS PACKAGING SPECS AS PER GS-14-920
d - LEGAL STATEMENT : SEE GS-47-0004

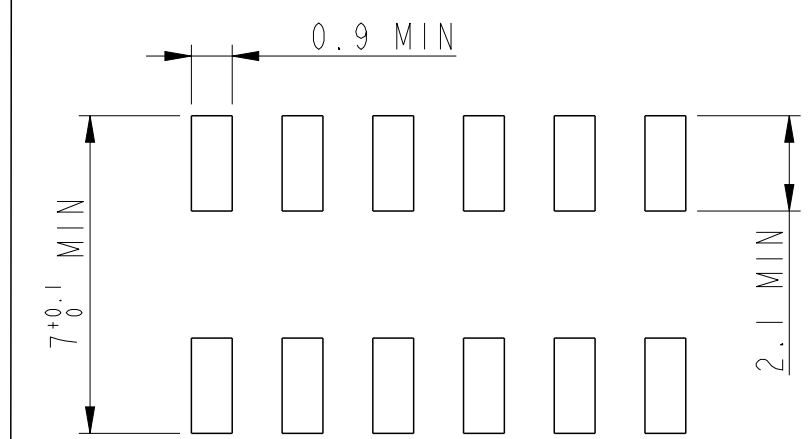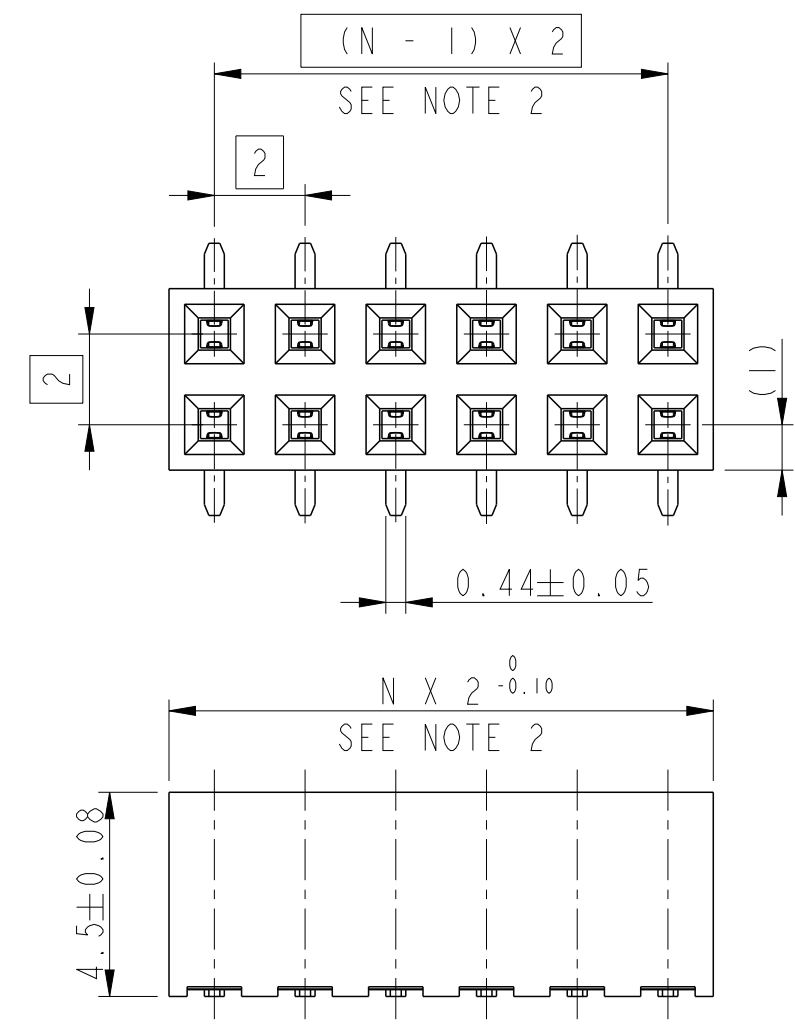

RECOMMENDED PAD LAYOUT

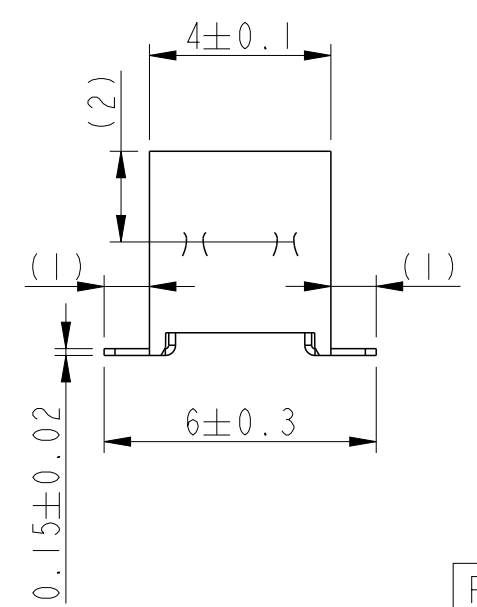

PRELIMINARY

spec ref		GS-12-1326			dr		Cyril Jeune	2014/12/02	projection		mm		size		A3	scale		6:1			
tolerance std		TOLERANCES UNLESS OTHERWISE SPECIFIED			eng		Benoit Vernier	2015/11/16					ecn no					-			
ISO 406					chr		-	-					product family					-			
ISO 1101					appr		-	-										rel level			
surface					linear		0.X	±							title		MINITEK RECEPTACLE 2MM		dwg no		10131937
				0.XX	±																
				0.XXX	±																
ISO 1302		angular		0°	±°	www.fci.com		cat. no.		-	Product - Customer Drw					sheet 1 of 1					

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

FCI / Amphenol:

[10131937-134ULF](#) [10131937-136ULF](#) [10131937-218ULF](#) [10131937-238ULF](#) [10131937-340ULF](#) [10131937-906ULF](#) [10131937-922ULF](#) [10131937-924ULF](#) [10131937-244ULF](#) [10131937-346ULF](#) [10131937-932ULF](#) [10131937-120ULF](#) [10131937-138ULF](#) [10131937-140ULF](#) [10131937-224ULF](#) [10131937-240ULF](#) [10131937-242ULF](#) [10131937-308ULF](#) [10131937-324ULF](#) [10131937-326ULF](#) [10131937-342ULF](#) [10131937-926ULF](#) [10131937-928ULF](#) [10131937-110ULF](#) [10131937-126ULF](#) [10131937-212ULF](#) [10131937-106ULF](#) [10131937-122ULF](#) [10131937-328ULF](#) [10131937-930ULF](#) [10131937-944ULF](#) [10131937-946ULF](#) [10131937-114ULF](#) [10131937-128ULF](#) [10131937-220ULF](#) [10131937-236ULF](#) [10131937-304ULF](#) [10131937-306ULF](#) [10131937-320ULF](#) [10131937-322ULF](#) [10131937-338ULF](#) [10131937-940ULF](#) [10131937-116ULF](#) [10131937-108ULF](#) [10131937-142ULF](#) [10131937-210ULF](#) [10131937-228ULF](#) [10131937-314ULF](#) [10131937-330ULF](#) [10131937-348ULF](#) [10131937-950ULF](#) [10131937-112ULF](#) [10131937-132ULF](#) [10131937-148ULF](#) [10131937-232ULF](#) [10131937-316ULF](#) [10131937-336ULF](#) [10131937-904ULF](#) [10131937-936ULF](#) [10131937-246ULF](#) [10131937-312ULF](#) [10131937-332ULF](#) [10131937-914ULF](#) [10131937-916ULF](#) [10131937-934ULF](#) [10131937-948ULF](#) [10131937-118ULF](#) [10131937-104ULF](#) [10131937-206ULF](#) [10131937-208ULF](#) [10131937-222ULF](#) [10131937-130ULF](#) [10131937-146ULF](#) [10131937-216ULF](#) [10131937-248ULF](#) [10131937-334ULF](#) [10131937-350ULF](#) [10131937-918ULF](#) [10131937-310ULF](#) [10131937-344ULF](#) [10131937-910ULF](#) [10131937-912ULF](#) [10131937-214ULF](#) [10131937-234ULF](#) [10131937-250ULF](#) [10131937-318ULF](#) [10131937-920ULF](#) [10131937-938ULF](#) [10131937-150ULF](#) [10131937-204ULF](#) [10131937-908ULF](#) [10131937-942ULF](#) [10131937-124ULF](#) [10131937-144ULF](#) [10131937-226ULF](#) [10131937-230ULF](#)