


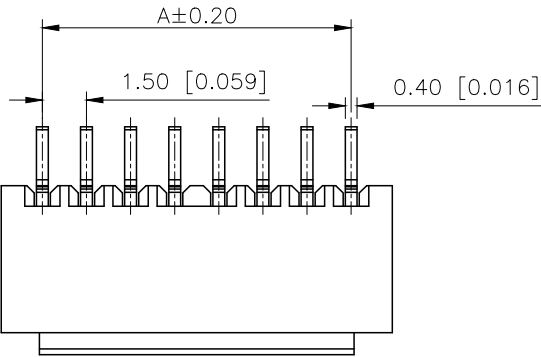
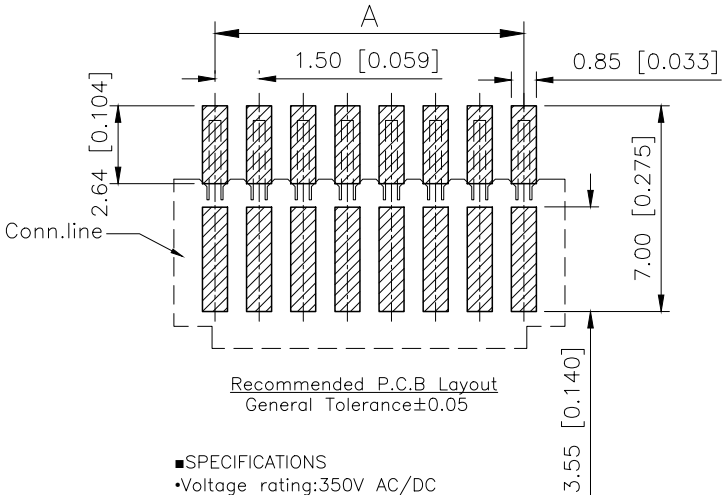

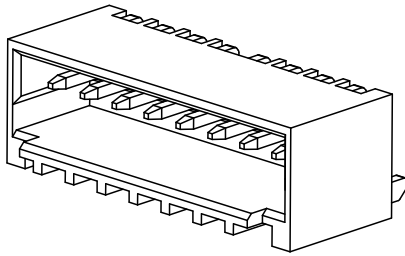


REVISIONS					
REV.	ECN NO.	LOCATION	DESCRIPTION	DATE	DESIGN
A0	N/A		INITIAL RELEASE	/	/
A1	N/A		图面升级整理图面	2024.9.05	阿树

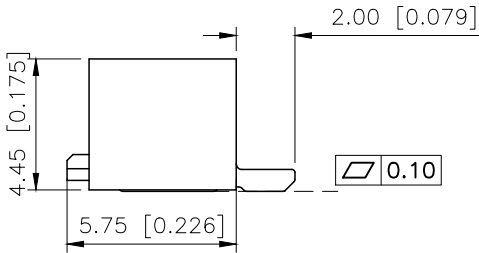

SECTION A-A
SCALE 1:1

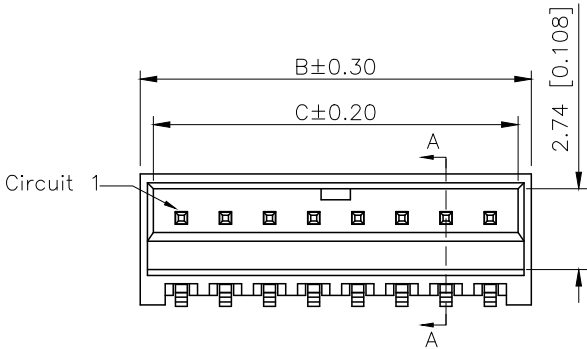

- SPECIFICATIONS
- Voltage rating:350V AC/DC
 - Current rating:3A AC/DC
 - Withstanding Voltage:500V AC/minute
 - Temperature range:-40°C~+125°C
 - Insulation resistance:≥100MΩ
 - Contact resistance:≤20mΩ
 - After environmental testing:≤40mΩ

PART NO.:

X1511 W R S-XX HF-LP SW
① ② ③ ④ ⑤ ⑥ ⑦ ⑧

- ①Series No
②Category:W-Wafer
③Welding Board Angle:R-Straight 90°
④Welding Way:S-SMT
⑤Row No.Pin No:XX-02~15Pin
⑥Plug the pin & Special No:HF-Halogen free
⑦Material: 9T-PA9T;46-PA46;LP-LCP 94V-0
⑧Planting Categorty:SW-Matte Tin Plating

Poles	Dimensions(mm)		
	A	B	C
02	1.50	4.30	3.40
03	3.00	5.80	4.90
04	4.50	7.30	6.40
05	6.00	8.80	7.90
06	7.50	10.30	9.40
07	9.00	11.80	10.90
08	10.50	13.30	12.40
09	12.00	14.80	13.90
10	13.50	16.30	15.40
11	15.00	17.80	16.90
12	16.50	19.30	18.40
13	18.00	20.80	19.90
14	19.50	22.30	21.40
15	21.00	23.80	22.90

X1511WRS-XXHF-LPSW	LCP UL 94V-0 Halogen Free	Brass	Matte Tin Plating	X1511H
PART NO	Material	Material(Pin& SolderTab)	Finish(Pin)	Suitable XKb Terminal

AuGLAR	±5°
X.	±0.40
X.x	±0.30
X.xx	±0.20
X.xxx	±0.15
UNSPECIFIED TOLERANCES	



DESIGN	阿树	VIEW:	
CHECKED		UNIT:	mm/in
APPROVED		SIZE:	A4

MODEL TYPE: 1.50mm Crimp Style Connectors
PART NO.: X1511WRS-XXHF-LPSW
DWG NO.: