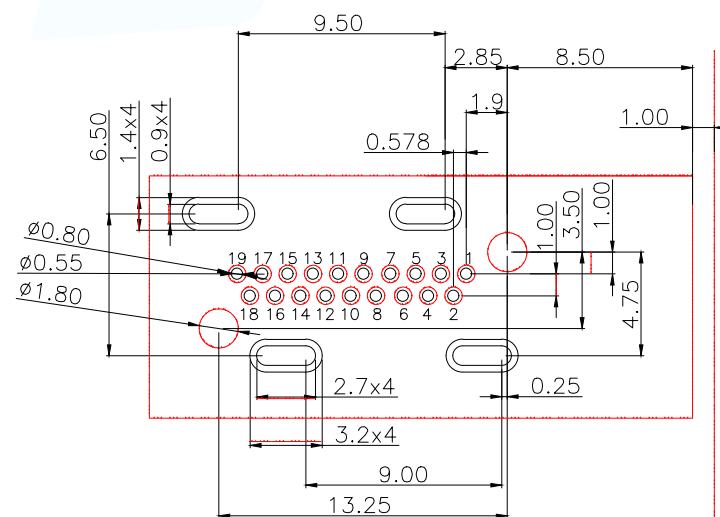
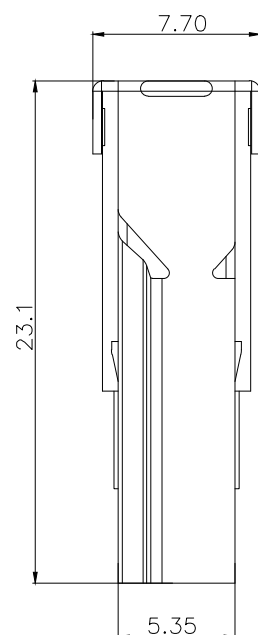
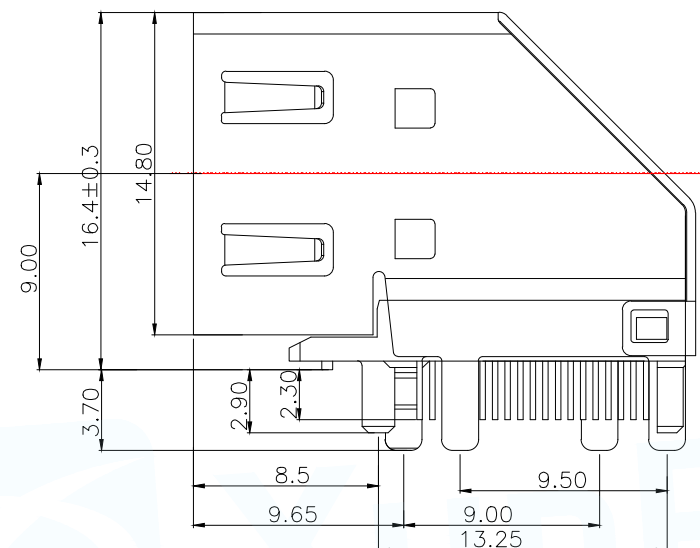
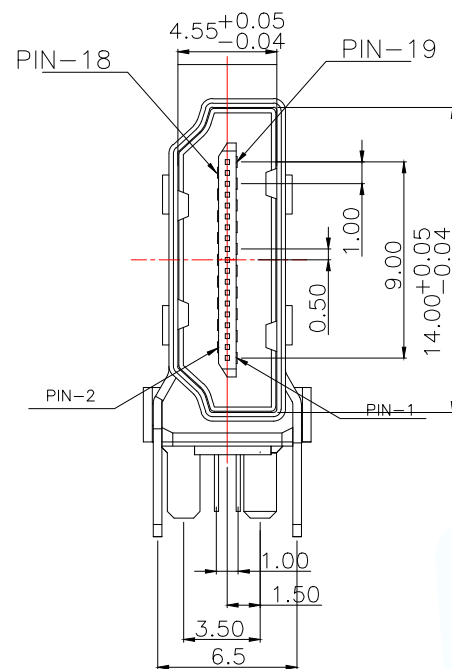


规格:

- 1.插入力:44.1N MAX.
- 2.拔出力:9.8~25N
- 3.耐久性:10000 CYCLES MIN.
- 4.额定电流:0.5A
- 5.额定电压:40V MAX
- 6.耐电压:500V AC MIN.(UNMATED)
300V AC MIN.(MATED)
- 7.接触阻抗:30m Ω MAX.
- 8.绝缘电阻:100M Ω MIN(UNMATED)
10M Ω MIN(MATED)
- 9.工作温度:-40 $^{\circ}$ C TO +85 $^{\circ}$ C
- 10.所用材质须符合RoHS要求

1	TMDS Data2+	11	TMDS Clock Shield
2	TMDS Data2 Shield	12	TMDS Clock-
3	TMDS Data2-	13	CEC
4	TMDS Data1+	14	Reserved (N.C.on device)
5	TMDS Data1 Shield	15	SCL
6	TMDS Data1-	16	SDA
7	TMDS Data0+	17	DDC/CEC Ground
8	TMDS Data0 Shield	18	+5V Power
9	TMDS Data0-	19	Hot Plug Detect
10	TMDS Clock+		

MANUFACTURE DWG		 东莞市讯普电子科技有限公司 DongGuan XunPu Electronics Co.,Ltd	
UNLESS OTHERWISE SPECIFIED TOLERANCES			TITLE: HDMI (A TYPE) F
DECIMALS:	ANGLES:		PAR HDMI-001C
X.X:±0.30	X.°:±2°		DWN
X.XX:±0.25	X.X°:±0.5°		CHKD
X.XXX:±0.15		CUSTOMER COPY	APVD
		SCALE:1:1	UNIT:MM
		SIZE:A4	SHEET:1F1
			REV:A

RECOMMENDED P.C.B HOLE LAYOUT
COMPONENT SIDE VIEW(TOLERANCE: $\pm$ 0.05)