
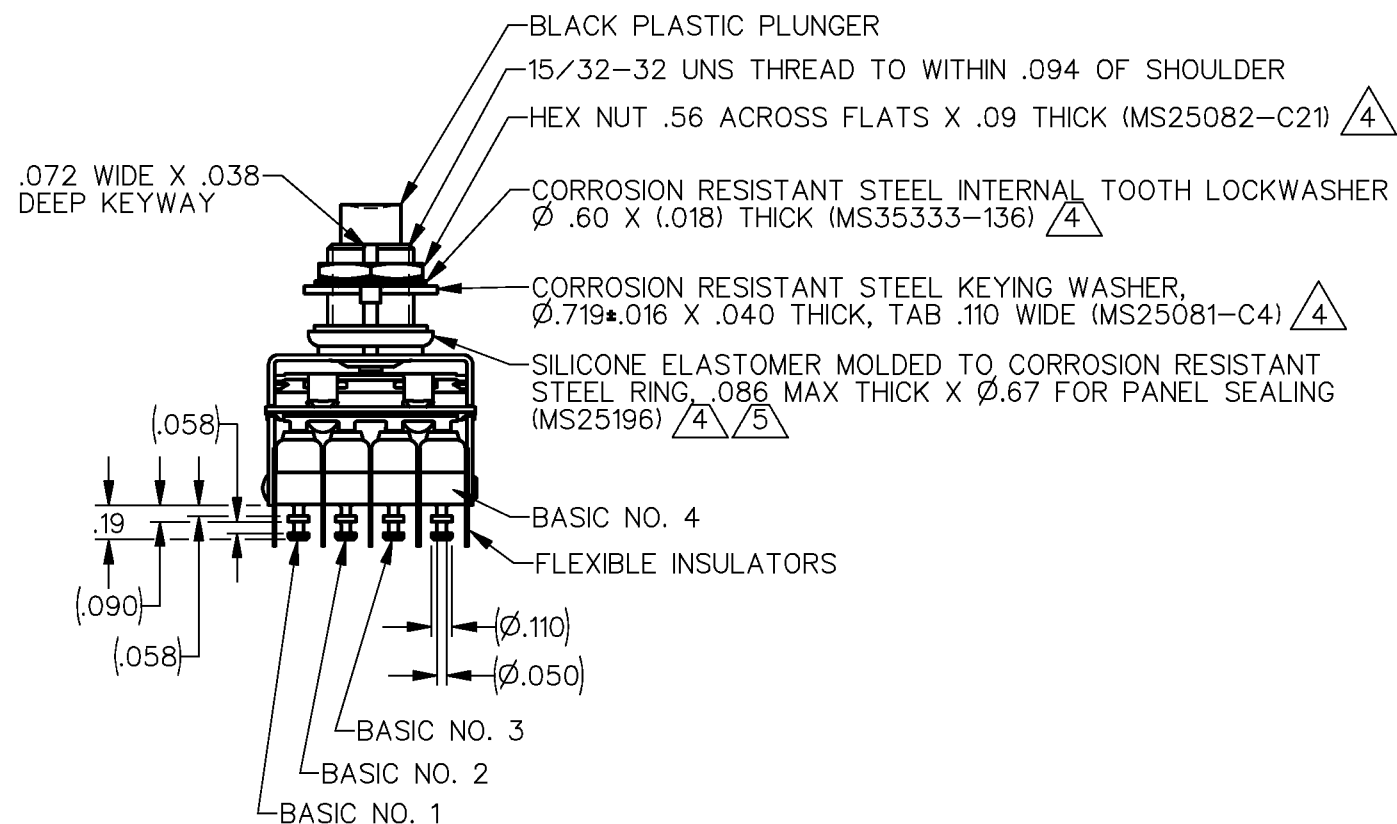
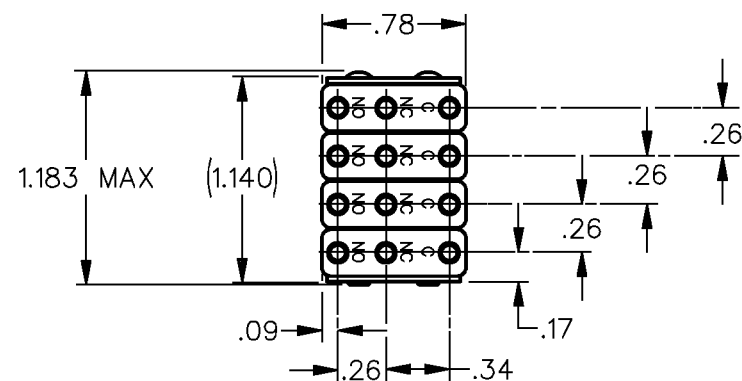
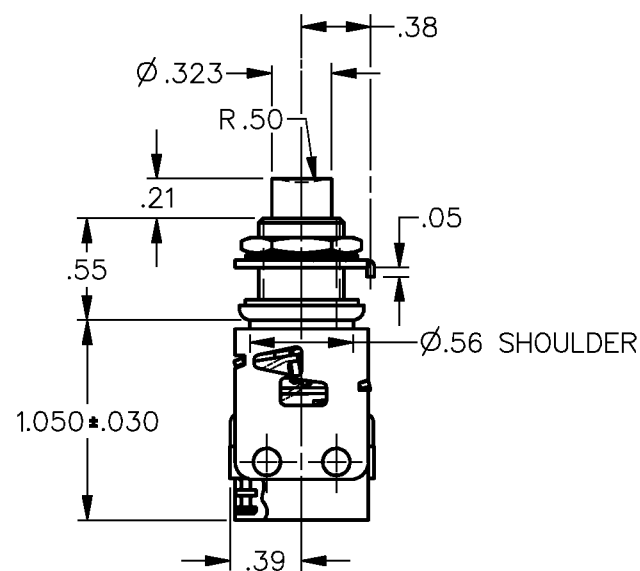




THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

CHARACTERISTICS OPERATING FORCE — — — 5.5 LB MAX TOTAL TRAVEL — — — .100 APPROX	ELECTRICAL DATA				SCALE FULL
	CONTACT ARRANGEMENT				DO NOT SCALE PRINT
	4X S P D T				UNLESS OTHERWISE SPECIFIED TOLERANCES ARE
		SEA LEVEL	50,000 FT.		
	LOAD	28 VDC	115 VAC	28 VDC	ONE PLACE (.0) ±.030
	RES	5	5	5	TWO PLACE (.00) ±.015
	IND	3	5	2.5	THREE PLACE (.000) ±.005
	LAMP	2.4	1.5	2.4	ANGLES ±
					WEIGHT .075 LB MAX

NOTES

- NOTES
- 1 - UNIT INCLUDES 4X MS25085-2 BASIC SWITCH
 - 2 - TERMINALS ARE PLATED FOR SOLDERING
 - 3 - SWITCHES DO NOT NECESSARILY OPERATE SIMULTANEOUSLY
 - 4 MOUNTING HARDWARE FURNISHED UNASSEMBLED
 - 5 FOR PANEL SEAL TO BE EFFECTIVE MOUNTING HOLE IN PANEL SHOULD NOT EXCEED $\phi .500$

ANSI Y14.5M-1982 APPLIES