


P.C.B LAYOUT(copper-sided view)

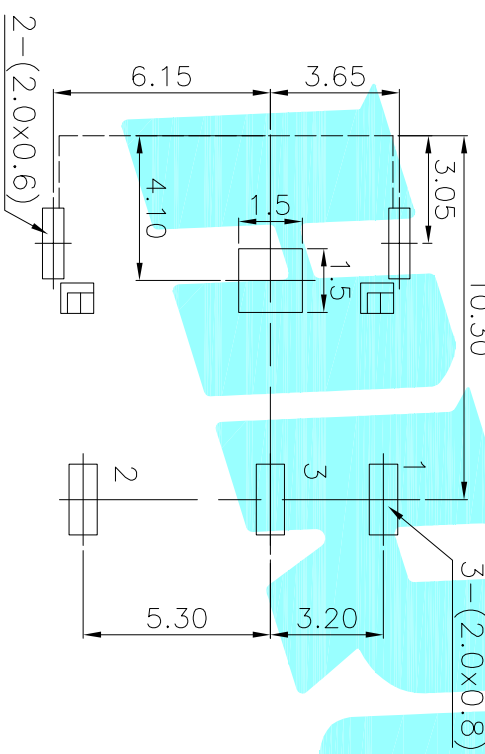

Model No.	A=1.4,H=3	A=φ1.5,H=3	A=1.6,H=3	A=1.4,H=1
DC-044A-A	DC-044A-B	DC-044F-A	DC-044G-B	DC-044H-H
DC-044F-A	DC-044F-B	DC-044G-A	DC-044G-B	DC-044H-H
DC-044H-A	DC-044H-B	DC-044H-A	DC-044H-B	DC-044H-H

Model No.	1	2	3
PIN	φ1.65	φ2.0	φ2.5

Rating:0.5A 30V DC
 Contact Resistance:100 mΩ Max.
 Operating temperature:-20℃~70℃
 Operating force:3-20N
 Operating Life:5,000cycles

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

ITEM	PART NAME	TER.NO.	QTY.	MATERIAL	FINISHING	REMARK
②	Terminal		3	Phosphor bronze	Au Plating	
①	Housing		1	Nylon	Black	

DRAWN	J.X.Zhong	DATE	2013/11/11	TITLE:	PHONE JACKETS
CHECKED					
APPROVALS				PART NO.	DC-044A

TOLERANCES ARE		30~φ1.1	±0.30	ANGLE	UNIT: mm	SCALE: 1:1	PROJ:	SHEET
10~30	±0.20	5~10	±0.15	±2°			1 OF 1	

