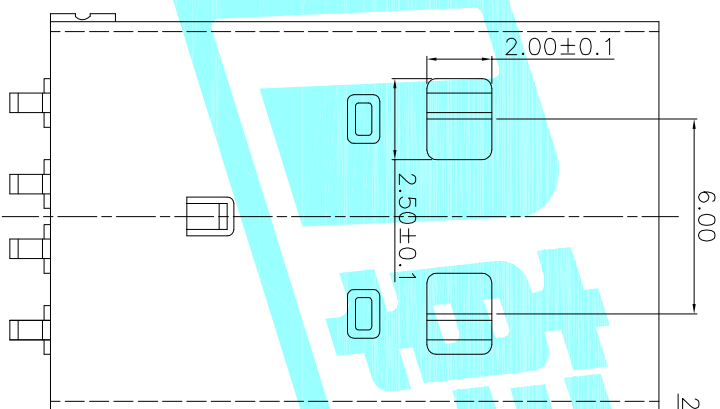
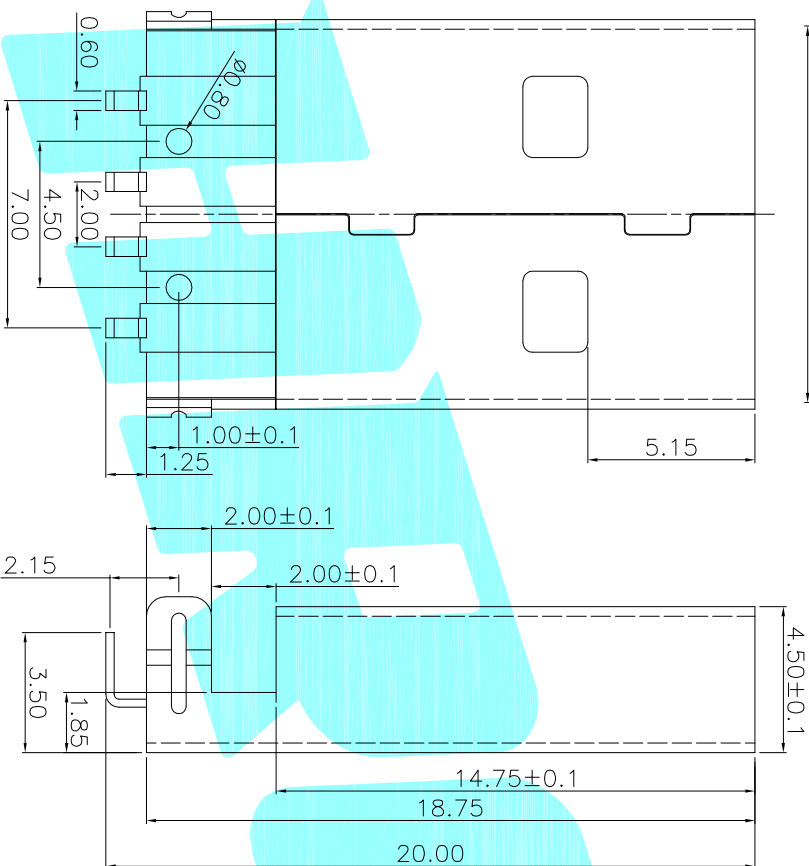
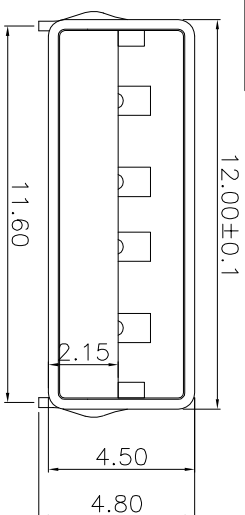


SPECIFICATIONS

- 1.Rating : DC 30V 1.0A
- 2.Contact Resistance: ≤50mΩ
- 3.Insulation Resistance:
≥1000mΩ Min DC250V
- 4.Operating Temperature Range:
-40℃+85℃

PART NO.	
U-G-04DD-W-01	U-G-04DD-W-02
Housing&Black	Housing&White

③	Shell	—	1	SPCC	Ni Plated	—
②	Contact	—	4	Copper Alloy	Ag Plated	—
①	Housing	—	1	Nylon	White/Black	—
ITEM	PART NAME	TER'NO.	QTY.	MATERIAL	FINISHING	REMARK

APPROVALS		DATE	ELECTRONICS CO.,LTD			
DRAWN	JKUN.LU	2014/9/29				

CHECKED		TITLE:		USB CONNECTOR		
APPROVALS		PART NO.		U-G-04DD-W-□		
TOLERANCES ARE		30~0.1±	±0.30	ANGLE	UNIT: mm	SCALE: 1:1
		10~30	±0.25			PROJ: ①
		5~10	±0.20			SHEET 1 OF 1
		~5	±0.15	±2°	DRAWING NO.	
ECN NO.	REV.	DATE.	DESCRIPTION.			
	A		NEW			

