



SGM8605-1

1.2mA, 12.5MHz, Rail-to-Rail I/O CMOS Operational Amplifier

GENERAL DESCRIPTION

The SGM8605-1 (single with shutdown) is a low voltage, low noise and low power operational amplifier, which can operate from 2.1V to 5.5V single supply, while consuming only 1.2mA quiescent current at 5V. The supply current is less than 1 μ A in power-down mode.

The SGM8605-1 features a 4.5mV maximum input offset voltage. The minimum input common mode voltage is within 0.1V below the negative rail, and the output swing is rail-to-rail with heavy loads. It exhibits a high gain-bandwidth product of 12.5MHz and a slew rate of 8.5V/ μ s. These specifications make the operational amplifier appropriate for various applications.

The SGM8605-1 is available in a Green UTDFN-1.45 \times 1-6L package. It is specified over the extended -40 $^{\circ}$ C to +125 $^{\circ}$ C industrial temperature range.

FEATURES

- **Input Offset Voltage: 0.9mV (TYP)**
- **High Gain-Bandwidth Product: 12.5MHz**
- **High Slew Rate: 8.5V/ μ s**
- **Settling Time to 0.1% with 2V Step: 0.21 μ s**
- **Overload Recovery Time: 0.6 μ s**
- **Rail-to-Rail Input and Output**
- **Supply Voltage Range: 2.1V to 5.5V**
- **Input Common Mode Voltage Range: -0.1V to 5.6V with $V_S = 5.5V$**
- **Low Power:**
 - **1.2mA (TYP) Supply Current**
- **-40 $^{\circ}$ C to +125 $^{\circ}$ C Operating Temperature Range**
- **Available in a Green UTDFN-1.45 \times 1-6L Package**

APPLICATIONS

Sensors
Audio
Active Filters
A/D Converters
Communications
Test Equipment
Cellular and Cordless Phones
Laptops and PDAs
Photodiode Amplification
Battery-Powered Instrumentation

SGM8605-1


PACKAGE/ORDERING INFORMATION

MODEL	PACKAGE DESCRIPTION	SPECIFIED TEMPERATURE RANGE	ORDERING NUMBER	PACKAGE MARKING	PACKING OPTION
SGM8605-1	UTDFN-1.45×1-6L	-40°C to +125°C	SGM8605-1XUDL6G/TR	78X	Tape and Reel, 5000

MARKING INFORMATION

NOTE: X = Date Code.

YY X



Green (RoHS & HSF): SG Micro Corp defines "Green" to mean Pb-Free (RoHS compatible) and free of halogen substances. If you have additional comments or questions, please contact your SGMICRO representative directly.

ABSOLUTE MAXIMUM RATINGS

Supply Voltage, +V_S to -V_S 6V
 Input Common Mode Voltage Range.....
 (-V_S) - 0.3V to (+V_S) + 0.3V
 Junction Temperature.....+150°C
 Storage Temperature Range -65°C to +150°C
 Lead Temperature (Soldering, 10s).....+260°C
 ESD Susceptibility
 HBM..... 8000V
 MM..... 400V
 CDM 1000V

RECOMMENDED OPERATING CONDITIONS

Input Voltage Range2.1V to 5.5V
 Operating Temperature Range-40°C to +125°C

OVERSTRESS CAUTION

Stresses beyond those listed in Absolute Maximum Ratings may cause permanent damage to the device. Exposure to absolute maximum rating conditions for extended periods may affect reliability. Functional operation of the device at any conditions beyond those indicated in the Recommended Operating Conditions section is not implied.


ESD SENSITIVITY CAUTION

This integrated circuit can be damaged if ESD protections are not considered carefully. SGMICRO recommends that all integrated circuits be handled with appropriate precautions. Failure to observe proper handling and installation procedures can cause damage. ESD damage can range from subtle performance degradation to complete device failure. Precision integrated circuits may be more susceptible to damage because even small parametric changes could cause the device not to meet the published specifications.

DISCLAIMER

SG Micro Corp reserves the right to make any change in circuit design, or specifications without prior notice.

PIN CONFIGURATION

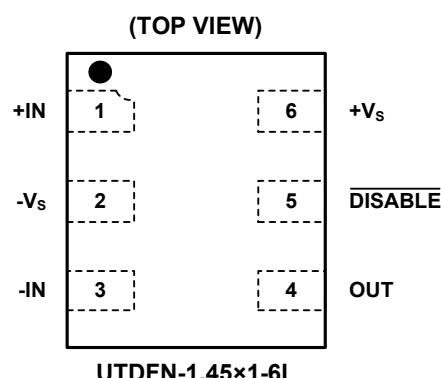

ELECTRICAL CHARACTERISTICS(At $V_S = +5V$, $T_A = +25^\circ C$, $V_{CM} = +V_S/2$, $R_L = 600\Omega$, unless otherwise noted.)







PARAMETER	CONDITIONS	SGM8605-1					
		TYP	MIN/MAX OVER TEMPERATURE			UNITS	MIN/MAX
		+25°C	+25°C	-40°C to +125°C			
Input Characteristics							
Input Offset Voltage (V_{OS})		0.9	4.5	4.8	mV	MAX	
Input Bias Current (I_B)		2			pA	TYP	
Input Offset Current (I_{OS})		3			pA	TYP	
Input Common Mode Voltage Range (V_{CM})	$V_S = 5.5V$	-0.1 to 5.6			V	TYP	
Common Mode Rejection Ratio (CMRR)	$V_S = 5.5V$, $V_{CM} = -0.1V$ to $4V$	79	68	65	dB	MIN	
	$V_S = 5.5V$, $V_{CM} = -0.1V$ to $5.6V$	75	60	58	dB	MIN	
Open-Loop Voltage Gain (A_{OL})	$R_L = 600\Omega$, $V_{OUT} = 0.15V$ to $4.85V$	88	80	67	dB	MIN	
	$R_L = 10k\Omega$, $V_{OUT} = 0.05V$ to $4.95V$	100	96	75	dB	MIN	
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$)		2			$\mu V/^\circ C$	TYP	
Output Characteristics							
Output Voltage Swing from Rail	$R_L = 600\Omega$	74	96	123	mV	TYP	
	$R_L = 10k\Omega$	6	13	19	mV	TYP	
Output Current (I_{OUT})		78	59	50	mA	MIN	
Closed-Loop Output Impedance	$f = 1MHz$, $G = +1$	8.5			Ω	TYP	
Power-Down Disable							
Turn-On Time		1			μs	TYP	
Turn-Off Time		0.2			μs	TYP	
$\overline{DISABLE}$ Voltage-Off			0.8		V	MAX	
$\overline{DISABLE}$ Voltage-On			2		V	MIN	
Power Supply							
Operating Voltage Range			2.1	2.1	V	MIN	
			5.5	5.5	V	MAX	
Power Supply Rejection Ratio (PSRR)	$V_S = 2.1V$ to $5.5V$, $V_{CM} = (-V_S) + 0.5V$	75	67	61	dB	MIN	
Quiescent Current (I_Q)	$I_{OUT} = 0$	1.2	1.5	1.9	mA	MAX	
Supply Current when Disabled		0.5	8	10	μA	MAX	
Dynamic Performance							
Gain-Bandwidth Product (GBP)	$R_L = 600\Omega$	12.5			MHz	TYP	
Phase Margin (ϕ_O)		65			degrees	TYP	
Slew Rate (SR)	$G = +1$, 2V output step	8.5			V/ μs	TYP	
Settling Time to 0.1% (t_s)	$G = +1$, 2V output step	0.21			μs	TYP	
Overload Recovery Time	$V_{IN} \times G = V_S$	0.6			μs	TYP	
Noise Performance							
Input Voltage Noise Density (e_n)	$f = 1kHz$	12			nV/\sqrt{Hz}	TYP	
	$f = 10kHz$	8			nV/\sqrt{Hz}	TYP	

ELECTRICAL CHARACTERISTICS (continued)(At $V_S = +2.1V$, $T_A = +25^\circ C$, $V_{CM} = +V_S/2$, $R_L = 600\Omega$, unless otherwise noted.)

PARAMETER	CONDITIONS	SGM8605-1				
		TYP	MIN/MAX OVER TEMPERATURE			
		+25°C	+25°C	-40°C to +125°C	UNITS	MIN/MAX
Input Characteristics						
Input Offset Voltage (V_{OS})		0.8	4.7	4.9	mV	MAX
Input Bias Current (I_B)		2			pA	TYP
Input Offset Current (I_{OS})		3			pA	TYP
Input Common Mode Voltage Range (V_{CM})	$V_S = 2.1V$	-0.1 to 2.2			V	TYP
Common Mode Rejection Ratio (CMRR)	$V_S = 2.1V$, $V_{CM} = -0.1V$ to $0.6V$	70	60	50	dB	MIN
	$V_S = 2.1V$, $V_{CM} = -0.1V$ to $2.2V$	70	54	49	dB	MIN
Open-Loop Voltage Gain (A_{OL})	$R_L = 600\Omega$, $V_{OUT} = 0.15V$ to $1.95V$	87	81	64	dB	MIN
	$R_L = 10k\Omega$, $V_{OUT} = 0.05V$ to $2.05V$	97	90	72	dB	MIN
Input Offset Voltage Drift ($\Delta V_{OS}/\Delta T$)		2			$\mu V/^\circ C$	TYP
Output Characteristics						
Output Voltage Swing from Rail	$R_L = 600\Omega$	38	58	70	mV	TYP
	$R_L = 10k\Omega$	5	9	11	mV	TYP
Output Current (I_{OUT})		28	20	15	mA	MIN
Power-Down Disable						
Turn-On Time		7.4			μs	TYP
Turn-Off Time		0.4			μs	TYP
$\overline{DISABLE}$ Voltage-Off			0.4		V	MAX
$\overline{DISABLE}$ Voltage-On			1.8		V	MIN
Power Supply						
Quiescent Current (I_Q)	$I_{OUT} = 0$	1.3	1.55	1.9	mA	MAX
Supply Current when Disabled		0.5	4	6	μA	MAX
Dynamic Performance						
Gain-Bandwidth Product (GBP)	$R_L = 600\Omega$	12.5			MHz	TYP
Phase Margin (ϕ_O)		60			degrees	TYP
Slew Rate (SR)	$G = +1$, 1V output step	8.9			V/ μs	TYP
Settling Time to 0.1% (t_S)	$G = +1$, 1V output step	0.24			μs	TYP
Overload Recovery Time	$V_{IN} \times G = V_S$	0.53			μs	TYP
Noise Performance						
Input Voltage Noise Density (e_n)	$f = 1kHz$	12.5			nV/\sqrt{Hz}	TYP
	$f = 10kHz$	9			nV/\sqrt{Hz}	TYP







TYPICAL PERFORMANCE CHARACTERISTICS

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

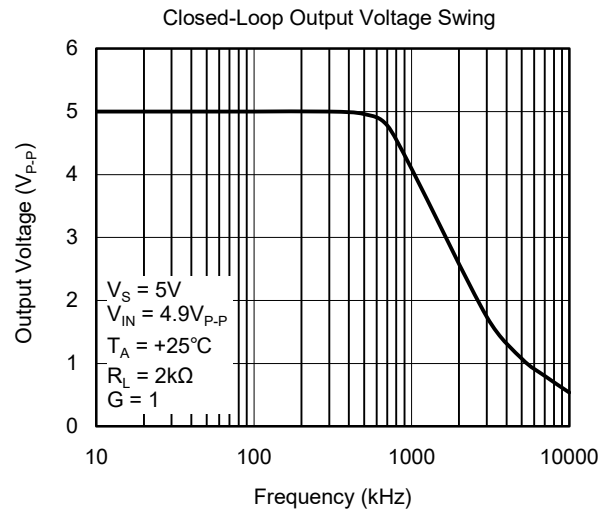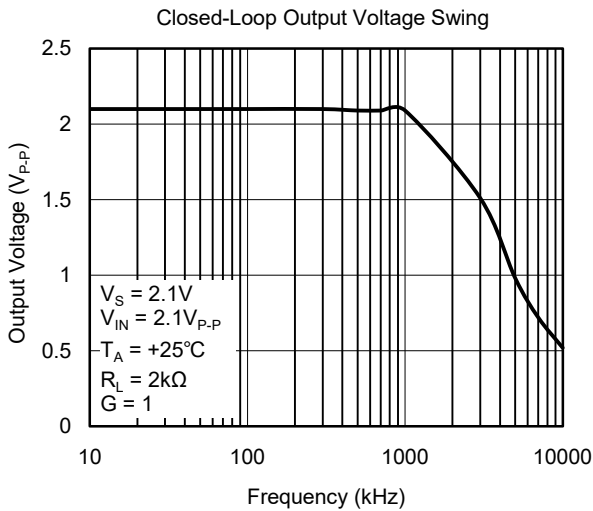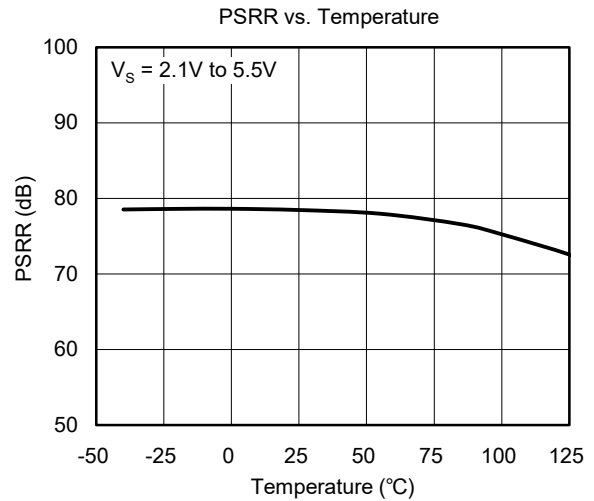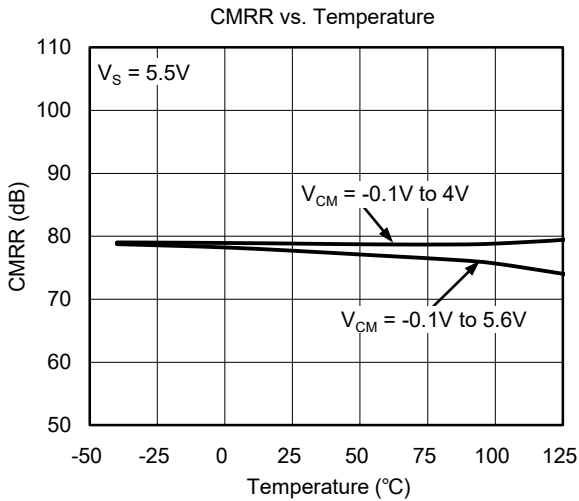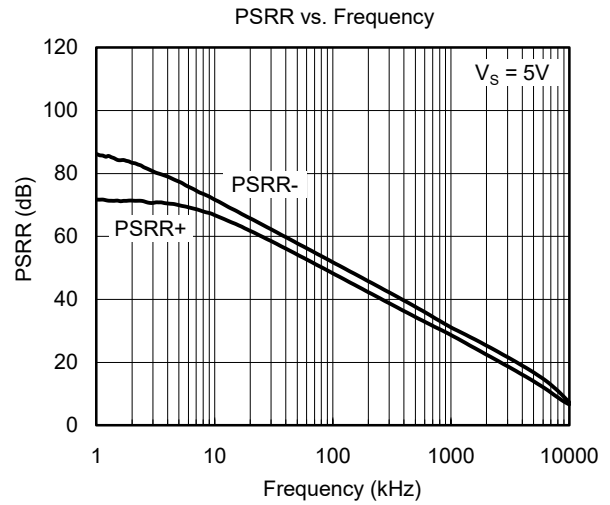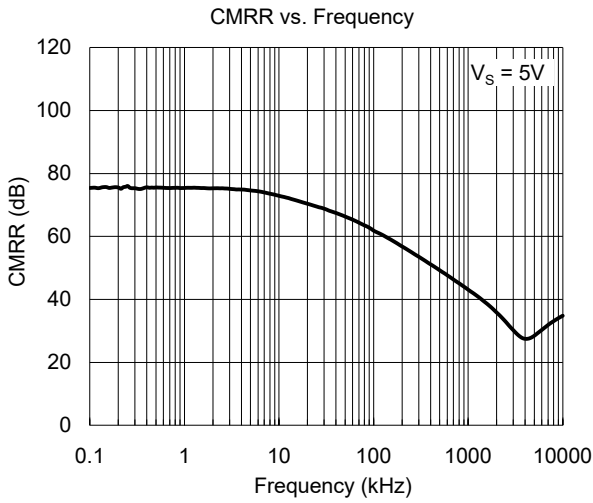

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

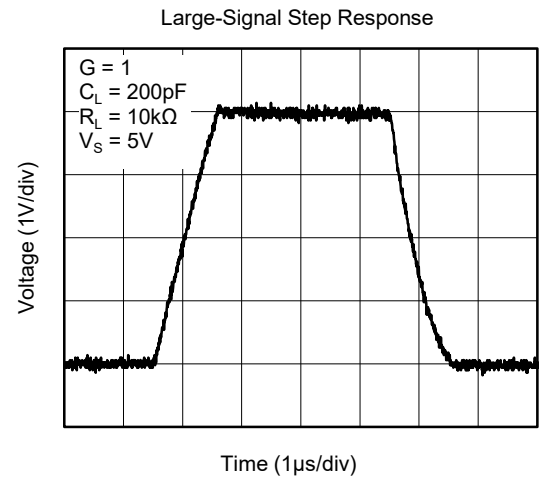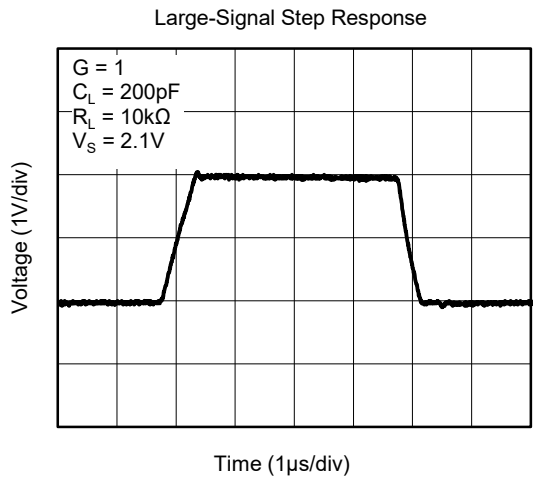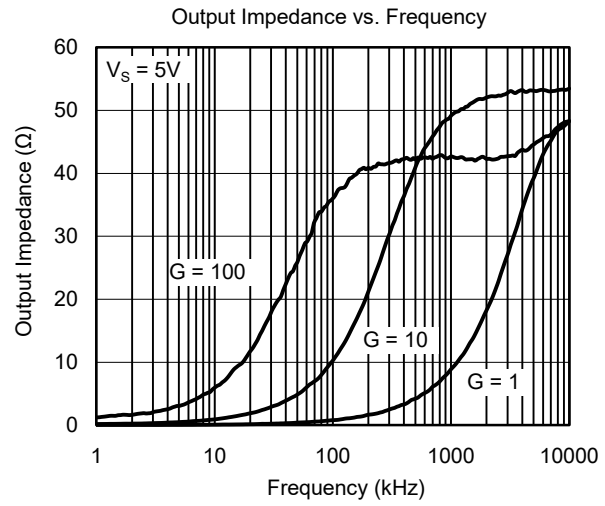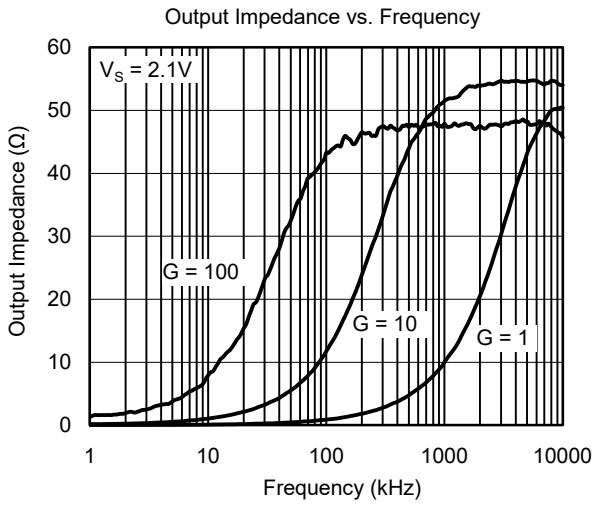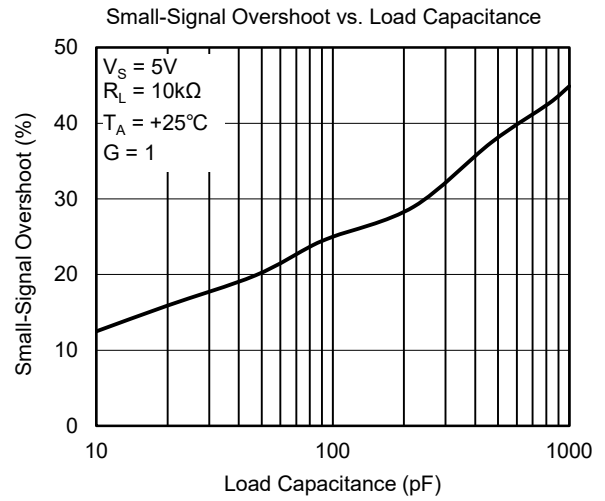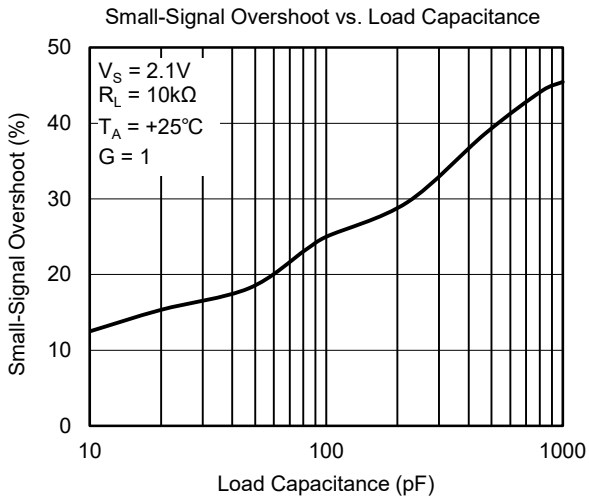

TYPICAL PERFORMANCE CHARACTERISTICS (continued)


At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

Small-Signal Step Response

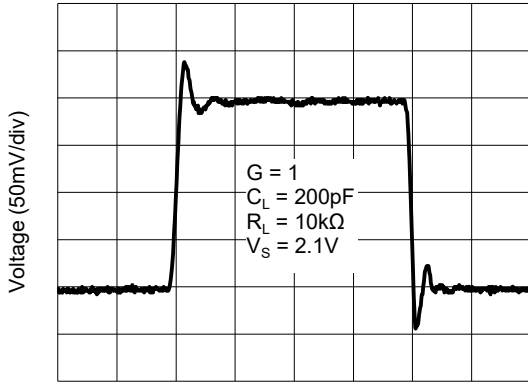


Time (200ns/div)

Small-Signal Step Response

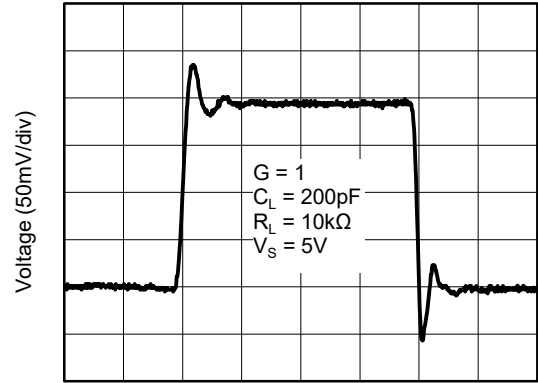


Time (200ns/div)

Positive Overload Recovery

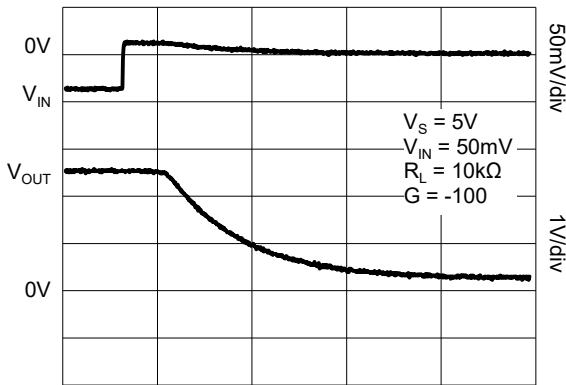


Time (1 μs /div)

Negative Overload Recovery

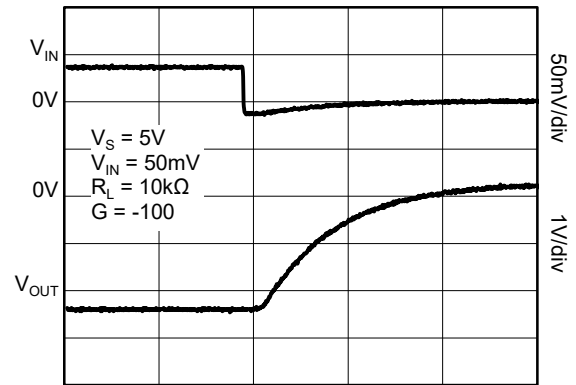


Time (1 μs /div)

Supply Current vs. Temperature






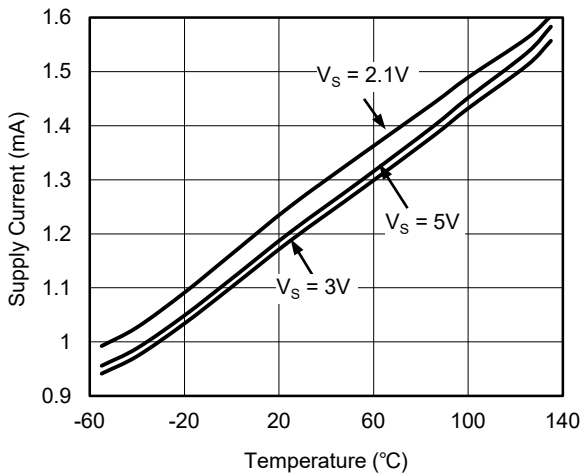


Shutdown Current vs. Temperature

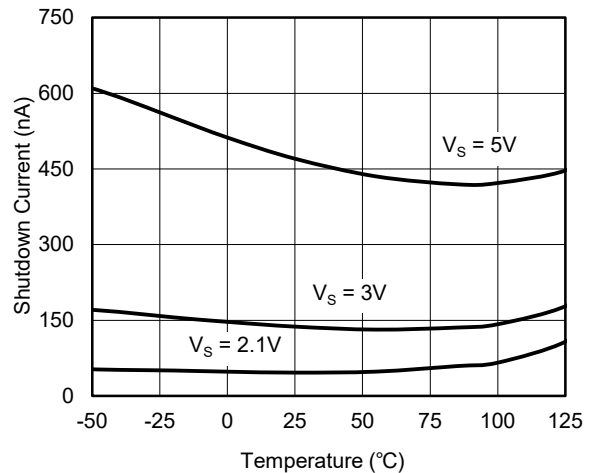

TYPICAL PERFORMANCE CHARACTERISTICS (continued)

At $T_A = +25^\circ\text{C}$, $V_{CM} = V_S/2$, $R_L = 600\Omega$, unless otherwise noted.

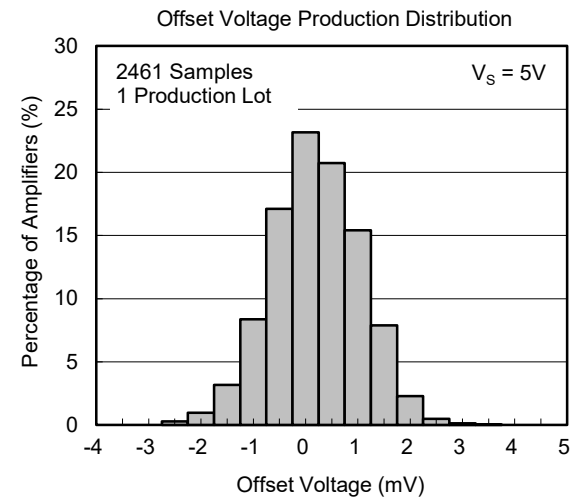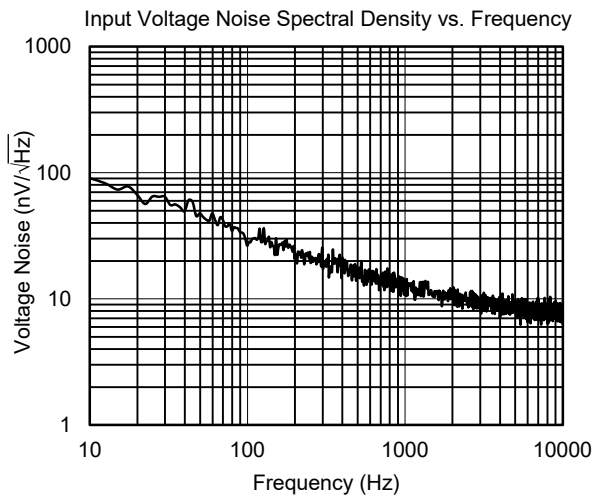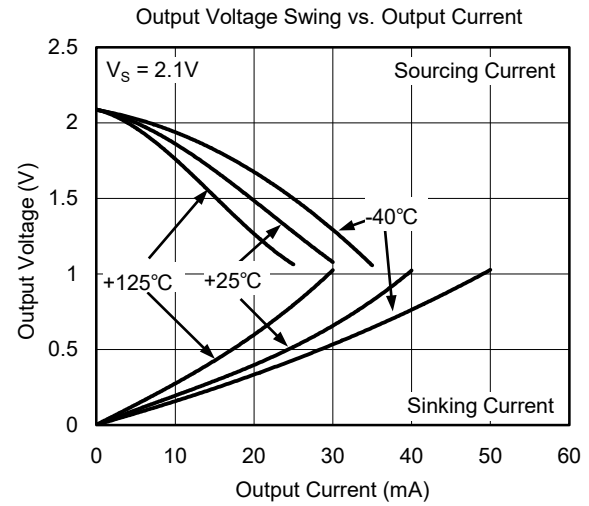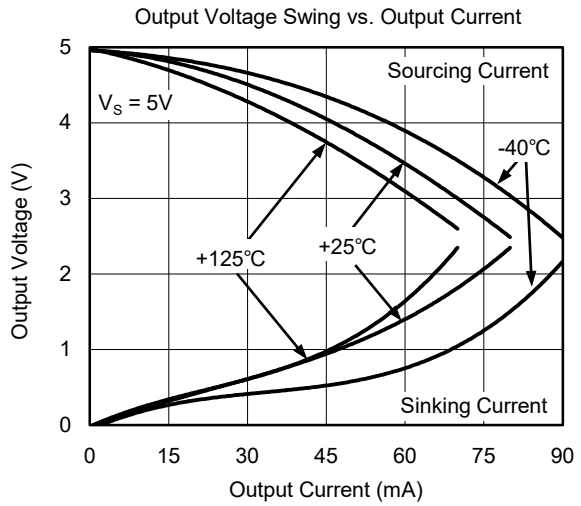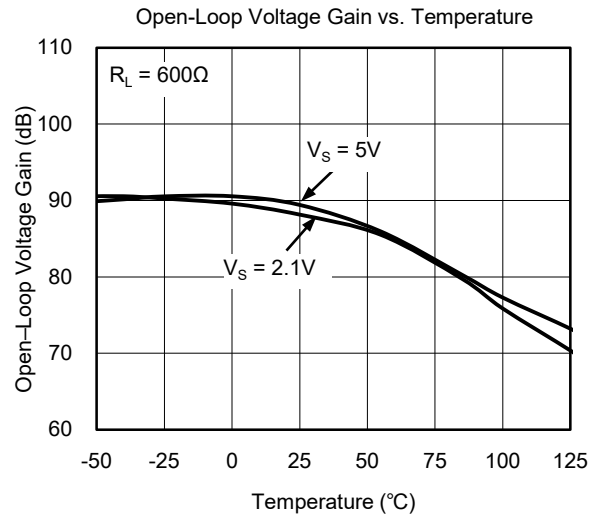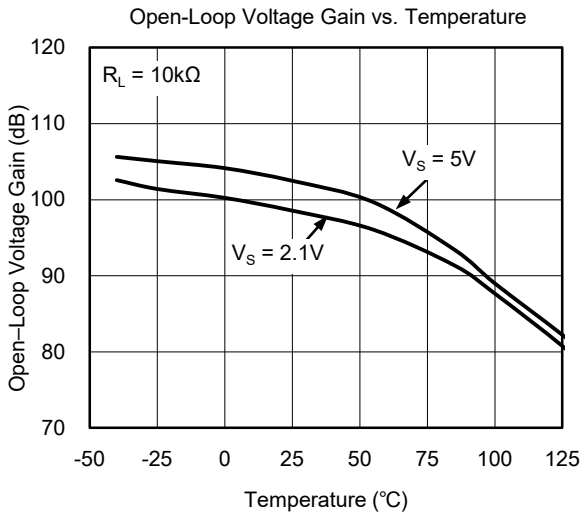


REVISION HISTORY

NOTE: Page numbers for previous revisions may differ from page numbers in the current version.


Changes from Original (MARCH 2016) to REV.A	Page
Changed from product preview to production data.....	All

PACKAGE OUTLINE DIMENSIONS


UTDFN-1.45×1-6L

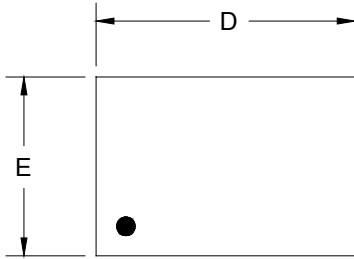


TOP VIEW

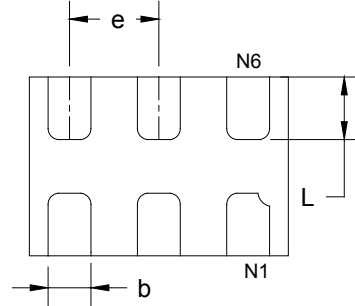

BOTTOM VIEW

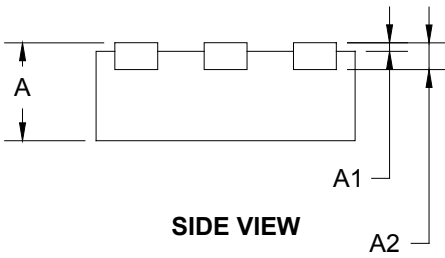

SIDE VIEW

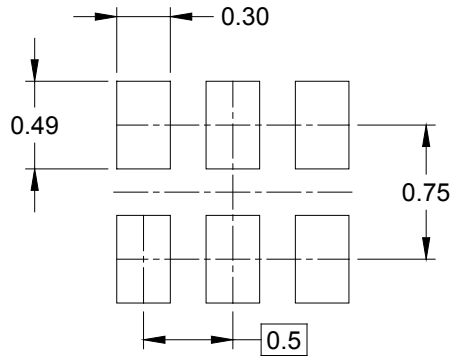

RECOMMENDED LAND PATTERN (Unit: mm)

Symbol	Dimensions In Millimeters		Dimensions In Inches	
	MIN	MAX	MIN	MAX
A	0.450	0.550	0.018	0.022
A1	0.000	0.050	0.000	0.002
A2	0.150 REF		0.006 REF	
D	1.374	1.526	0.054	0.060
E	0.924	1.076	0.036	0.042
b	0.180	0.300	0.007	0.012
e	0.500 TYP		0.020 TYP	
L	0.274	0.426	0.011	0.017

PACKAGE INFORMATION

TAPE AND REEL INFORMATION

REEL DIMENSIONS



TAPE DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF TAPE AND REEL

Package Type	Reel Diameter	Reel Width W1 (mm)	A0 (mm)	B0 (mm)	K0 (mm)	P0 (mm)	P1 (mm)	P2 (mm)	W (mm)	Pin1 Quadrant
UTDFN-1.45×1-6L	7"	9.5	1.15	1.60	0.75	4.0	4.0	2.0	8.0	Q1

000001

PACKAGE INFORMATION

CARTON BOX DIMENSIONS



NOTE: The picture is only for reference. Please make the object as the standard.

KEY PARAMETER LIST OF CARTON BOX

Reel Type	Length (mm)	Width (mm)	Height (mm)	Pizza/Carton
7" (Option)	368	227	224	8
7"	442	410	224	18

DD0002