


M.2 2280 SATA SSD

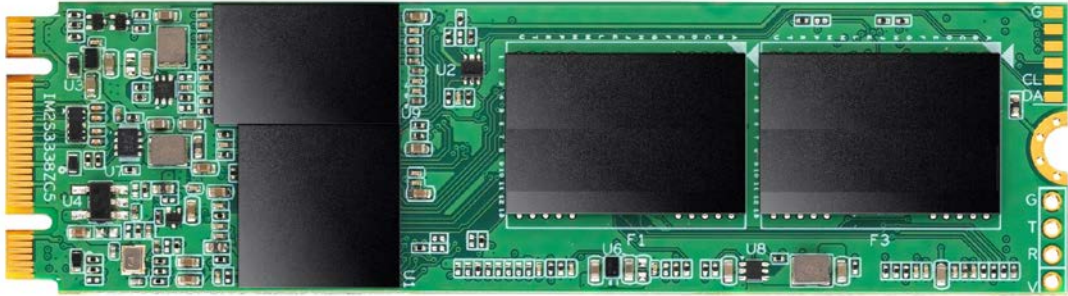

Product Name: UM28S3TND

Capacity : 128GB 、 256GB 、 512GB 、 1TB

Revision History

Revision	Date	Description	Editor
0	June 5, 2020	Initial Release	

Table of Contents

1.0 General Description	5
2.0 Mechanical Specification	6
2.1 Physical dimensions and Weight	6
2.2 Product Dimensions	6
3.0 Product Specification	7
3.1 Interface and configuration	7
3.2 Capacity	7
3.3 Performance	7
3.3.1 Read/Write & ATTO Performance	7
3.3.2 Read/Write & CDM Performance	7
3.3.3 IOPS Performance	8
3.3.4 Read/Write & AS-SSD Performance	8
3.4 Electrical	8
3.4.1 Operating Voltage	8
3.4.2 Power Consumption (Typical)	9
3.5 Environmental Conditions	9
3.6 Reliability	9
3.6.1 Reliability	9
3.7 Endurance	9
4.0 Supported Command Sets	10
4.1 Identify Device	10
4.2 S.M.A.R.T. Attribute	21
5.0 Pin assignment and descriptions	22
6.0 Product Line up	23
7.0 Package Specifications	23

Key Features

- **Capacity:**
 - 128GB, 256GB, 512GB, 1TB
- **NAND Flash:** 3D TLC, 96L
- **Form Factor:** M.2 2280
- **Compatibility:**
 - Serial ATA 6Gb/s interface
 - Complies with ATA-8 Standard
 - Complies SATA Revision 3.1
 - S.M.A.R.T feature supported
 - NCQ Command set supported
- **Performance:**
 - Sequential Read: Up to 550MB/s
 - Sequential Write: Up to 480MB/s
 - Random 4K Read:
Up to 55K
 - Random 4K Write:
Up to 45K
- **Power Consumption (Max.):**
 - Slumber: 0.05W
 - Active: 0.4W
 - SR/SW : 1.6W / 2.0W
 - RR/RW: 2.0W / 1.7W
 - Device Sleep: 5mW
- **Temperature:**
 - Commercial : 0°C - 70°C
 - Industrial : -40°C - 85°C
- **Reliability:**
 - Shock: 1500G/0.5ms
 - Vibration 20G Peak, 10-2000Hz
 - MTBF: 3,000,000 hours
 - TBW: 1200TB

1.0 General Description

Taking the advantages of NAND flash memory, Solid State Drive (SSD) provides better solutions on durability, performance, and power efficiency over traditional hard disk drives. Employing static wear-leveling technology to maximize device mean time between failures (MTBF), The SSD solutions are your best choice on wide-ranged mobile computing devices and consumer electronic products. With standard SATA form factor or customized module form factor, the M.2 2280 YTY UNiCORE SSD UM28S3TND offers capacities 128GB, 256GB, 512GB and 1TB using 3D TLC type flash memories.

2.0 Mechanical Specification

All product specifications not covered in this document (electrical performance, appearance, etc.) are in accordance with YTY UNICORE's defined norms and standards.


2.1 Physical dimensions and Weight

Table 2-1 Dimensions and Weight

Model	Length (mm)	Width (mm)	Height (mm)	Weight (gram)
UM28S3TND-128GNS5	80.00±0.15	22.00±0.15	Max 3.6	Max 10
UM28S3TND-256GNS5	80.00±0.15	22.00±0.15	Max 3.6	Max 10
UM28S3TND-512GNS5	80.00±0.15	22.00±0.15	Max 3.6	Max 10
UM28S3TND-001TNS5	80.00±0.15	22.00±0.15	Max 3.6	Max 10

2.2 Product Dimensions

Figure 2-1 Product Dimensions

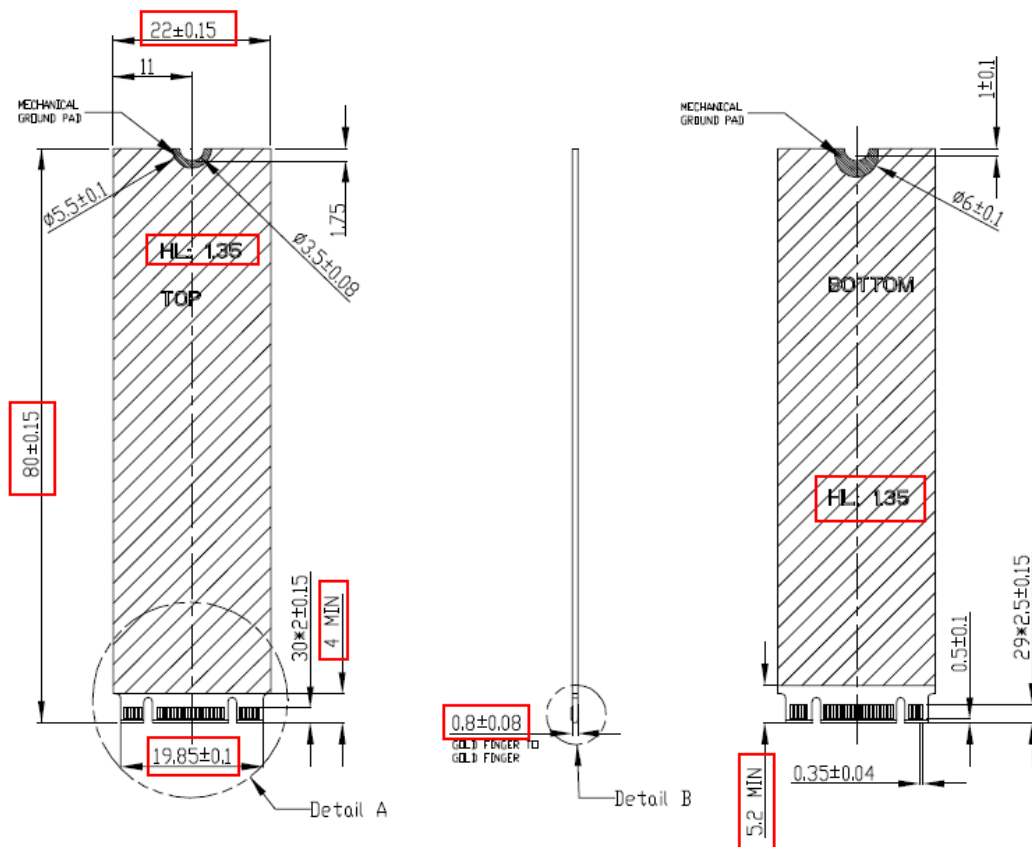

3.0 Product Specification

3.1 Interface and configuration

- Compliant with Serial ATA International Organization: Serial ATA Revision 3.1
- Compliant SSD Allion compliance program.
- Support ATA-8 Command Set
- Support 1-port 1.5/3.0/6.0 Gbps SATA I/II/III interface.

3.2 Capacity

Table 3-1 User Addressable Sectors

Model	US25S3TNN			
Unformatted Capacity	128GB	256GB	512GB	1TB
Total User Addressable Sectors (LBA Mode)	250,069,680	500,118,192	1,000,215,216	2,000,409,264

Total useable capacity may be less (due to formatting, flash management, and other functions).
1GB=1,000,000,000 bytes; 1sector = 512bytes.

3.3 Performance

3.3.1 Read/Write & ATTO Performance

Table 3-2 Read/Write Performance (ATTO)

	128GB	256GB	512GB	1TB	Unit
Sequential Read	500	500	500	500	MB/s
Sequential Write	320	340	470	480	MB/s

- Seq. Read & Write speed test by ATTO
- The system conditions and test environment may affect test result

3.3.2 Read/Write & CDM Performance

Table 3-3 Read/Write Performance (CDM)

	128GB	256GB	512GB	1TB	Unit
Sequential Q32 Read	550	550	550	550	MB/s
Sequential Q32 Write	300	320	470	470	MB/s

- Seq. Read & Write speed test by Crystal Disk Mark 5.1.2

3.3.3 IOPS Performance

Table 3-4 Read/Write & IOPS Performance

	128GB	256GB	512GB	1TB	Unit
4K Random Read	45K	48K	55K	55K	IOPS
4K Random Write	30K	30K	46K	47K	IOPS

- Seq. Read & Write speed test by IOmeter 2010 with "00" pattern (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- IOPS Test Utility: IOmeter 2010 (Queue depth of 32; Measurements are performed on 10% capacity of LBA range. Write cache enable)
- The system conditions and test environment may affect test result

3.3.4 Read/Write & AS-SSD Performance

Table 3-5 Read/Write Performance (AS-SSD)

	128GB	256GB	512GB	1TB	Unit
Sequential Read	530	530	530	530	MB/s
Sequential Write	295	300	450	450	MB/s
4K-64 Thrd Read	170	180	210	220	MB/s
4K-64 Thrd Write	100	110	170	180	MB/s

- Seq. Read & Write speed test by AS-SSD with Random pattern

3.4 Electrical

3.4.1 Operating Voltage

Table 3-6 Operating Voltage

Operating Voltage	
Input Power	DC 3.3V ± 5%
Maximum Ripple	100mV p-p or less

3.4.2 Power Consumption (Typical)

Table 3-7 Power Consumption (Typical)

	128GB	256GB	512GB	1TB	Unit
Slumber	0.1	0.1	0.1	0.1	W
Active	0.4	0.4	0.4	0.4	W
Sequential Read	1.4	1.5	1.5	1.6	W
Sequential Write	1.8	1.8	2.0	2.0	W
Random Read	1.8	1.8	2.0	2.0	W
Random Write	1.7	1.7	1.7	1.7	W
Device Sleep	5	5	5	5	mW

3.5 Environmental Conditions

Table 3-8 Temperature, Humidity, Shock, Vibration

Feature	Operating	Non-Operating
Normal Temperature	0°C to 70°C	-55°C to 95°C
Wide Temperature	-40°C to 85°C	-55°C to 95°C
Humidity	0°C to 55°C / 5%~95% RH, non-condensing	
Vibration	20G Peak, 10~2000Hz	
Shock	1500G, duration 0.5ms, Half Sine Wave	

3.6 Reliability

3.6.1 Reliability

Table 3-9 Reliability Specification

Parameter	Simulate Value
Mean Time Between Failures (MTBF) The MTBF statistics were calculated by Part Count Method, not relevant to individual units	3,000,000 hours

3.7 Endurance

Endurance for the SSD can be predicted based on the operating workload .The tables as below shows the drive lifetime for each SSD capacity based JESD219 client workload.

Table 3-10 Tera Byte Written

Total Byte Written (TBW)	128GB	256GB	512GB	1TB	Unit
	150	300	600	1200	TB

4.0 Supported Command Sets

4.1 Identify Device

IDENTIFY DEVICE (ECh). This commands read out 512Bytes of drive parameter information. Parameter Information consists of the arrangement and value as shown in the following table. This command enables the host to receive the Identify Drive Information from the device.

Table 4-1 Identify Device Table

Word	Value	F/V/X	Description
0	0040h	F	General configuration bit-significant information:
	0		15 0 = ATA device
	0		14-8 Retired
	1		7:6 Obsolete
	0		5-3 Retired
	0		2 Response incomplete
	0		1 Retired
	0		0 Reserved
1	3FFFh	X	Obsolete
2	C837h	V	Specific configuration
3	0010h	X	Obsolete
4-5	XXXXh	X	Retired
6	003Fh	X	Obsolete
7-8	XXXXh	V	Reserved for the Compact Flash Association
9	0000h	X	Retired
10-19	XXXXh	F	Serial number
20-21	XXXXh	X	Retired
22	0000h	X	Obsolete
23-26	XXXXh	F	Firmware revision (8 ASCII characters)
27-46	XXXXh	F	Model number (40 ASCII characters)
47	8002h	F	Capabilities
	80		15-8 80h
	02		07-00 00h = Reserved
			01h-FFh = Maximum number of logical sectors that shall be transferred per DRQ data block on READ/WRITE MULTIPLE commands
48	4000h	F	Trusted Computing feature set options
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:1 Reserved for the Trusted Computing Group
	0		0 1=Trusted Computing feature set is supported
49	2F00h	F	Capabilities
	0		15:14 Reserved for the IDENTIFY PACKET DEVICE command

	1		13 1 = Standby timer values as specified in this standard are supported
			0 = Standby timer values shall be managed by the device
	0		12 Reserved for the IDENTIFY PACKET DEVICE command
	1		11 1 = IORDY supported
			0 = IORDY may be supported
	1		10 1 = IORDY may be disabled
	1		9 1 = LBA is supported
	1		8 1 = DMA supported
	00		7:2 Reserved
	0		1:0 Current Long Physical Sector Alignment setting
50	4000h	F	Capabilities
	0	F	15 Shall be cleared to zero
	1	F	14 Shall be set to one
	000	X	13:01 Reserved
	0	X	1 Obsolete
	0	F	0 Vendor specific Standby timer value minimum
51-52	XXXXh	X	Obsolete
53	0007h		Field Validity
	00	F	15:8 Free-fall Control Sensitivity
			00h = Vendor's recommended setting
			01h-FFh = Sensitivity level
	00	X	7:3 Reserved
	1	F	2 1 = Word 88 are valid
	1	F	1 1 = Word 70:64 are valid
	1	F	0 Obsolete
54-58	XXXXh	X	Obsolete
59	B101h		Capabilities
	1	F	15 1 = BLOCK ERASE EXT command is supported
	0	F	14 1 = OVERWRITE EXT command is supported
	1	F	13 1 = CRYPTO SCRAMBLE EXT command is supported
	1	F	12 1 = Sanitize feature set is supported
	0	F	11:9 Reserved
	1	V	8 1 = Multiple logical sector setting is valid
	01	V	7:0 Current setting for number of logical sectors
60-61	XXXXh	F	Total number of user addressable logical sectors
62	0000h	X	Obsolete
63	0007h		Multiword DMA transfer
	00	F	15:11 Reserved
	0	V	10 1 = Multiword DMA mode 2 is selected
	0	V	9 1 = Multiword DMA mode 1 is selected

	0	V	8	1 = Multiword DMA mode 0 is selected
	00	X	7:3	Reserved
	1	F	2	1 = Multiword DMA mode 2 and below are supported
	1	F	1	1 = Multiword DMA mode 1 and below are supported
	1	F	0	1 = Multiword DMA mode 0 is supported
64	0003h			PIO transfer mode
	0000	F	15:2	Reserved
	3	F	1:0	PIO modes supported
65	0078h			Minimum Multiword DMA transfer cycle time per word
		F	15:0	Cycle time in nanoseconds
66	0078h			Manufacturer's recommended Multiword DMA transfer cycle time
		F	15:0	Cycle time in nanoseconds
67	0078h			Minimum PIO transfer cycle time without flow control
		F	15:0	Cycle time in nanoseconds
68	0078h			Minimum PIO transfer cycle time with IORDY flow control
		F	15:0	Cycle time in nanoseconds
69	0D10h	X		Additional Supported
	0		15	1 = CFAST Specification Support
	0		14	1 = Deterministic data in trimmed LBA range(s) is supported
	0		13	1 = Long Physical Sector Alignment Error Reporting Control is supported
	0		12	Obsolete
	1		11	1 = READ BUFFER DMA is supported
	1		10	1 = WRITE BUFFER DMA is supported
	0		9	1 = SET MAX SET PASSWORD DMA and SET MAX UNLOCK DMA are supported
	1		8	1 = DOWNLOAD MICROCODE DMA is supported
	0		7	Reserved for IEEE 1667
	0		6	0 = Optional ATA device 28-bit commands supported
	0		5	1 = Trimmed LBA range(s) returning zeroed data is supported
	1		4	1 = Device Encrypts All User Data
	0		3	1 = Extended Number of User Addressable Sectors is supported
	0		2	1 = All write cache is non-volatile
	0		1:0	Reserved
70	0000h	F		Reserved
71-74	XXXXh	F		Reserved for the IDENTIFY PACKET DEVICE command
75	001Fh			Queue depth
	000	F	15:5	Reserved
	1F	F	4:0	Maximum queue depth - 1
76	850Eh	X		Serial ATA Capabilities
	1		15	1 = Supports READ LOG DMA EXT as equivalent to READ LOG EXT

	0		14	1 = Supports Device Automatic Partial to Slumber transitions
	0		13	1 = Supports Host Automatic Partial to Slumber transitions
	0		12	1 = Supports NCQ priority information
	0		11	1 = Supports Unload while NCQ commands are outstanding
	1		10	1 = Supports the SATA Phy Event Counters log
	0		9	1 = Supports receipt of host initiated power management requests(HIPM)
	1		8	1 = Supports the NCQ feature set
	0		7:4	Reserved for Serial ATA
	1		3	1 = Supports SATA Gen3 Signaling Speed (6.0Gb/s)
	1		2	1 = Supports SATA Gen2 Signaling Speed (3.0Gb/s)
	1		1	1 = Supports SATA Gen1 Signaling Speed (1.5Gb/s)
	0		0	Shall be cleared to zero
77	0006h	X		Serial ATA Additional Capabilities
	000		15:7	Reserved for Serial ATA
	0		6	1 = Supports RECEIVE FPDMA QUEUED and SEND FPDMA QUEUED commands
	0		5	1 = Supports NCQ Queue Management Command
	0		4	1 = Supports NCQ Streaming
	3		3:1	Serial ATA signal speed (01:Gen1, 02:Gen2, 03:Gen3)
	0		0	Shall be cleared to zero
78	014Ch	X		Serial ATA features supported
	0	X	15:9	Reserved for Serial ATA
	1	X	8	1 = Device Sleep supported
	0	X	7	1 = Device supports NCQ Autosense
	1	X	6	1 = Device supports Software Settings Preservation
	0	X	5	Reserved for Serial ATA
	0	X	4	1 = Device supports in-order data delivery
	1	X	3	1 = Device supports initiating power management(DIPM)
	1	X	2	1 = Device supports DMA Setup auto-activation
	0	X	1	1 = Device supports non-zero buffer offsets
	0	F	0	Shall be cleared to zero
79	0044h			Serial ATA features enabled
	00		15:9	Reserved for Serial ATA
	0		8	1 = Device Sleep enabled
	0		7	1 = Automatic Partial to Slumber transitions enabled
	1		6	1 = Software Settings Preservation enabled
	0		5	Reserved for Serial ATA
	0		4	1 = In-order data delivery enabled
	0		3	1 = Device initiated power management enabled(DIPM)
	1		2	1 = DMA Setup auto-activation enabled

	0		1 1 = Non-zero buffer offsets enabled
	0		0 Shall be cleared to zero
80	03F0h	X	Major version number 0000h or FFFFh = device does not report version
	0		15:11 Reserved
	0		10 1 = supports ACS-3
	1		9 1 = supports ACS-2
	1		8 1 = supports ATA8-ACS
	1		7 1 = supports ATA/ATAPI-7
	1		6 1 = supports ATA/ATAPI-6
	1		5 1 = supports ATA/ATAPI-5
	8		4:1 Obsolete
	0		0 Reserved
81	0000h	V	Minor version number
82	746Bh	X	Commands and feature sets supported
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	1		11:10 Obsolete
	0		9 1 = DEVICE RESET command is supported
	0		8:7 Obsolete
	1		6 1 = Read look-ahead is supported
	1		5 1 = Volatile write cache is supported
	0		4 1 = PACKET feature set is supported
	1		3 1 = Power Management feature set is supported
	0		2 Obsolete
	1		1 1 = Security feature set is supported
	1		0 1 = SMART feature set is supported
83	7D01h	X	Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	1		13 1 = FLUSH CACHE EXT command is supported
	1		12 1 = Mandatory FLUSH CACHE command is supported
	1		11 Obsolete
	1		10 1 = 48-bit Address feature set is supported
	1		9:8 Obsolete
	0		7 Reserved for the Address Offset Reserved Area Boot Method
	0		6 1 = SET FEATURES subcommand is required to spin-up after power-up
	0		5 1 = PUIS feature set is supported

	0		4 Obsolete
	0		3 1 = APM feature set is supported
	0		2 1 = CFA feature set is supported
	0		1 Obsolete
	1		0 1 = DOWNLOAD MICROCODE command is supported
84	4163h	X	Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0		13 IDLE IMMEDIATE command with UNLOAD feature is supported
	0		12 Reserved for TLC
	0		11 Reserved for TLC
	0		10:9 Obsolete
	1		8 1 = 64-bit world wide name is supported
	0		7 Obsolete
	1		6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported
	1		5 1 = GPL feature set is supported
	0		4 1 = Streaming feature set is supported
	0		3 Obsolete
	0		2 1 = Media serial number is supported
	1		1 1 = SMART self-test is supported
	1		0 1 = SMART error logging is supported
85	7469h	X	Commands and feature sets supported or enabled
	0		15 Obsolete
	1		14 1 = NOP command is supported
	1		13 1 = READ BUFFER command is supported
	1		12 1 = WRITE BUFFER command is supported
	1		11:10 Obsolete
	0		9 1 = DEVICE RESET command is supported
	0		8 1 = SERVICE interrupt is enabled
	0		7 1 = Release interrupt is enabled
	1		6 1 = Read look-ahead is enabled
	1		5 1 = Volatile write cache is enabled
	0		4 1 = PACKET feature set is supported
	1		3 1 = Mandatory Power Management feature set is supported
	0		2 Obsolete
	0		1 1 = Security feature set is enabled
	1		0 1 = SMART feature set is enabled
86	BC01h	X	Commands and feature sets supported or enabled
	1		15 1 = Words 119-120 are valid
	0		14 Reserved

	1		13 1 = FLUSH CACHE EXT command supported
	1		12 1 = FLUSH CACHE command supported
	1		11 Obsolete
	1		10 1 = 48-bit Address features set is supported
	0		9:8 Obsolete
	0		7 1 = Reserved for Address Offset Reserved Area Boot Method
	0		6 1 = SET FEATURES subcommand is required to spin-up after power-up
	0		5 1 = PUIS feature set is enabled
	0		4 Obsolete
	0		3 1 = APM feature set is enabled
	0		2 1 = CFA feature set is supported
	0		1 Obsolete
	1		0 1 = DOWNLOAD MICROCODE command is supported
87	4163h	X	Commands and feature sets supported or enabled
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0		13 1 = IDLE IMMEDIATE command with UNLOAD FEATURE is supported
	0		12 Reserved for TLC
	0		11 Reserved for TLC
	0		10:9 Obsolete
	1		8 1 = 64-bit world wide name is supported
	0		7 Obsolete
	1		6 1 = WRITE DMA FUA EXT and WRITE MULTIPLE FUA EXT commands are supported
	1		5 1 = GPL feature set is supported
	0		4:3 Obsolete
	0		2 1 = Media serial number is valid
	1		1 1 = SMART self-test supported
	1		0 1 = SMART error logging is supported
88	407Fh	X	Ultra DMA modes
	0		15 Reserved
	1		14 1 = Ultra DMA mode 6 is selected
	0		13 1 = Ultra DMA mode 5 is selected
	0		12 1 = Ultra DMA mode 4 is selected
	0		11 1 = Ultra DMA mode 3 is selected
	0		10 1 = Ultra DMA mode 2 is selected
	0		9 1 = Ultra DMA mode 1 is selected
	0		8 1 = Ultra DMA mode 0 is selected
	0		7 Reserved
	1		6 1 = Ultra DMA mode 6 and below are supported

	1	F	5	1 = Ultra DMA mode 5 and below are supported
	1	F	4	1 = Ultra DMA mode 4 and below are supported
	1	F	3	1 = Ultra DMA mode 3 and below are supported
	1	F	2	1 = Ultra DMA mode 2 and below are supported
	1	F	1	1 = Ultra DMA mode 1 and below are supported
	1	F	0	1 = Ultra DMA mode 0 is supported
89	0001h	F		Time required for security erase unit completion
	0		15	1 = Extended Time is reported in bits 14:0
				0 = Extended Time is reported in bits 7:0
	00		14:8	Extended Time required for Normal Erase mode
	01		7:0	Extended Time required for Normal Erase mode
90	0001h	F		Time required for Enhanced security erase completion
	0		15	1 = Extended Time is reported in bits 14:0
				0 = Extended Time is reported in bits 7:0
	00		14:8	Extended Time required for Enhanced Erase mode
	01		7:0	Extended Time required for Enhanced Erase mode
91	0000h	V		Advanced Power Management Level
	00		15:8	Reserved
	00		7:0	Current APM level value
92	FFFEh	V		Master Password Identifier
93	0000h	X		Hardware reset result
	0		15	Shall be cleared to zero
	0		14	Shall be set to one
	0		13	1 = device detected the CBLID- above
				0 = device detected the CBLID- below
	00		12:8	Device 1 hardware reset result
	00		7:0	Device 0 hardware reset result
94	0000h	V		Obsolete
95	0000h	V		Stream Minimum Request Size
96	0000h	V		Streaming Transfer Time - DMA
97	0000h	V		Streaming Access Latency - DMA and PIO
98-99	XXXXh	V		Streaming Performance Granularity
100-103	XXXXh	V		Number of User Addressable Logical Sectors
104	0000h	V		Streaming Transfer Time - PIO
105	0008h	V		Maximum number of 512-byte blocks per DATA SET MANAGEMENT command
106	4000h			Physical sector size / logical sector size
	0		15	Shall be cleared to zero
	1		14	Shall be set to one
	0		13	1 = Device has multiple logical sectors per physical sector
	0		12	1 = Device Logical Sector longer than 256 Words
	00		11:4	Reserved

	0		3:0 2^logical sectors per physical sector
107	0000h		Inter-seek delay for ISO 7779 standard acoustic testing
108-111	XXXXh	V	World wide name
112-115	XXXXh	X	Reserved
116	0000h	X	Reserved for TLC
117-118	XXXXh	X	Logical sector size
119	425C		Commands and feature sets supported
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	02		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is supported
	1		6 1 = Sense Data Reporting feature set is supported
	0		5 1 = Free-fall Control feature set is supported
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is supported
	0		0 Reserved for DDT
120	401C		Commands and feature sets supported or enabled
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	00		13:8 Reserved
	0		7 1 = Extended Power Conditions feature set is enabled
	0		6 1 = Sense Data Reporting feature set is enabled
	0		5 1 = Free-fall Control feature set is enabled
	1		4 1 = Download Microcode mode 3 is supported
	1		3 1 = READ LOG DMA EXT and WRITE LOG DMA EXT commands are supported
	1		2 1 = WRITE UNCORRECTABLE EXT command is supported
	0		1 1 = Write-Read-Verify feature set is enabled
	0		0 Reserved for DDT
121-126	XXXXh	X	Reserved for expanded supported and enabled settings
127	0000h	F	Obsolete
128	0029h	V	Security status
	00		15-9 Reserved
	0		8 Master Password Capability: 0 = High, 1 = Maximum
	0		7-6 Reserved
	1		5 1 = Enhanced security erase supported
	0		4 1 = Security count expired
	1		3 1 = Security frozen

	0		2 1 = Security locked
	0		1 1 = Security enabled
	1		0 1 = Security supported
129-159	XXXXh	X	Vendor specific
160	0000h	X	CFA power mode
	0		15 Word 160 supported
	0		14 Reserved
	0		13 CFA power mode 1 is required for one or more commands implemented by the device
	0		12 CFA power mode 1 disabled
	000		11:0 Maximum current in mA
161-167	XXXXh	X	Reserved for the CompactFlash Association
168	0000h		Device Nominal Form Factor
	000		15:4 Reserved
	0		3:0 Device Nominal Form Factor
169	0001		DATA SET MANAGEMENT command is supported
	0000		15:1 Reserved
	1		0 1 = Trim bit in the DATA SET MANAGEMENT command is supported
170-173	XXXXh	X	Additional Product Identifier
174-175	XXXXh	X	Reserved
176-205	XXXXh	V	Current media serial number
206	0031h	X	SCT Command Transport
	0		15:12 Vendor Specific
	0		11:8 Reserved
	0		7 Reserved for Serial ATA
	0		6 Reserved
	1		5 1 = SCT Data Tables command is supported
	1		4 1 = SCT Feature Control command is supported
	0		3 1 = SCT Error Recovery Control command is supported
	0		2 1 = SCT Write Same command is supported
	0		1 Obsolete
	1		0 1 = SCT Command Transport is supported
207-208	XXXXh	X	Reserved
209	4000h		Alignment of logical blocks within a physical block
	0		15 Shall be cleared to zero
	1		14 Shall be set to one
	0000		13:0 Logical sector offset within the first physical sector where the first logical sector is placed
210-211	XXXXh	V	Write-Read-Verify Sector Count Mode 3
212-213	XXXXh	V	Write-Read-Verify Sector Count Mode 2

214-216	XXXXh	X	Obsolete
217	0001h	V	Nominal media rotation rate
220	0000h	V	Write-Read-Verify feature
	00		15:8 Reserved
	00		7:0 Write-Read-Verify feature set current mode
221	0000h	X	Reserved
222	10FFh	X	Transport major version number
	1		15:12 Transport Type (0:Parallel, 1:Serial, 2-F:Reserved)
	03		11:6 Parallel = Reserved / Serial = Reserved
	1		5 Parallel = Reserved / Serial = SATA Rev 3.0
	1		4 Parallel = Reserved / Serial = SATA Rev 2.6
	1		3 Parallel = Reserved / Serial = SATA Rev 2.5
	1		2 Parallel = Reserved / Serial = SATA II Extensions
	1		1 Parallel = ATA/ATAPI-7 / Serial = SATA 1.0a
	1		0 Parallel = ATA8-APT / Serial = ATA8-AST
223	0000h	X	Transport minor version number
224-229	XXXXh	X	Reserved
230-233	XXXXh	X	Extended Number of User Addressable Sectors
234	0001h	X	Minimum number of 512-byte data blocks per Download Microcode mode 03h operation
235	0200h	X	Maximum number of 512-byte data blocks per Download Microcode mode 03h operation
236-254	XXXXh	X	Reserved
255	XXXXh	X	Integrity word
	XX		15-8 Checksum
	XX		7-0 Checksum Validity Indicator

Notes:

F/V = Fixed/variable content.

F = the content of the word is fixed and does not change. For removable media devices, these values may change when media is removed or changed.

V = the contents of the word is variable and may change depending on the state of the device or the commands executed by the device.

X = the content of the word may be fixed or variable.

4.2 S.M.A.R.T. Attribute

The following table defines the vendor specific data in byte 2 to 361 of the 512-byte SMART data.

Table 4-2 S.M.A.R.T. Attribute

ID (Dec)	ID (Hex)	Attribute Name
1	01h	Read Error Rate
5	05h	Reallocated Sectors Count
9	09h	Power-On Hours Count
12	0Ch	Power Cycle Count
160	A0h	Uncorrectable Sector Count On Line
161	A1h	Number of Pure Spare
163	A3h	Number of Initial Invalid Block
148	94h	SLC Total Erase Count
149	95h	SLC Max Erase Count
150	96h	SLC Min Erase Count
151	97h	SLC Average Erase Count
164	A4h	TLC Total Erase Count
165	A5h	TLC Max Erase Count
166	A6h	TLC Min Erase Count
167	A7h	TLC Average Erase Count
159	9Fh	DRAM 1 bit ECC Count
168	A8h	Max Erase Count in Spec
169	A9h	Remain Life Percentage
177	B1h	Wear Leveling Count
181	B5h	Program Fail Count
182	B6h	Erase Fail Count
187	BBh	Uncorrectable Error Count
192	C0h	Power off Retract Count
194	C2h	Temperature
196	C4h	Reallocation Event Count
199	C7h	UDMA CRC Error
232	E8h	Available Reserved Space
241	F1h	Write Sector Count
242	F2h	Read Sector Count
245	F5h	Flash Write count

5.0 Pin assignment and descriptions

Top Side			Bottom Side		
No.	Pin	Descriptions	Descriptions	Pin	No
75	GND	System Ground			
73	GND	System Ground	3.3V	POWER	74
71	GND	System Ground	3.3V	POWER	72
69	GND	System Ground	3.3V	POWER	70
67	NC	NC	3.3V	POWER	68
Module-KEY					
57	GND	System Ground	NC	UART	58
55	NC	NC	NC	UART	56
53	NC	NC	NC	NC	54
51	GND	System Ground	NC	NC	52
49	Diff	SATA-A+	NC	NC	50
47	Diff	SATA-A-	NC	NC	48
45	GND	System Ground	NC	NC	46
43	Diff	SATA-B-	NC	NC	44
41	Diff	SATA-B+	NC	NC	42
39	GND	System Ground	NC	NC	40
37	NC	NC	DEVSLP	DEVSLP	38
35	NC	NC	NC	NC	36
33	GND	System Ground	NC	NC	34
31	NC	NC	NC	NC	32
29	NC	NC	NC	NC	30
27	GND	System Ground	NC	NC	28
25	NC	NC	NC	NC	26
23	NC	NC	NC	NC	24
21	GND	System Ground	NC	NC	22
			NC	NC	20
Module-KEY					
11	NC	NC			
9	NC	NC	DAS/DSS (option)	INDICATE	10
7	NC	NC	NC	NC	8
5	NC	NC	NC	NC	6
3	GND	System Ground	3.3V	POWER	4
1	GND	System Ground	3.3V	POWER	2

6.0 Product Line up

Table 6-1 Product Line up

Part Number	Capacity	Type	P/E Cycle	Remark
UM28S3TND-128GNS5	128GB	M.2 2280 SATA	3K	Normal, 0°C-70°C
UM28S3TND-256GNS5	256GB	M.2 2280 SATA	3K	Normal, 0°C-70°C
UM28S3TND-512GNS5	512GB	M.2 2280 SATA	3K	Normal, 0°C-70°C
UM28S3TND-001TNS5	1TB	M.2 2280 SATA	3K	Normal, 0°C-70°C

7.0 Package Specifications

