

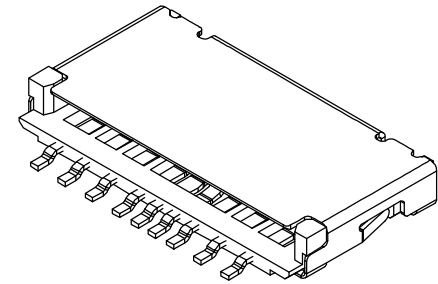


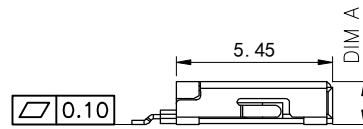

REV.	ECN NO OR DESCRIPTION	REVISED	DATE

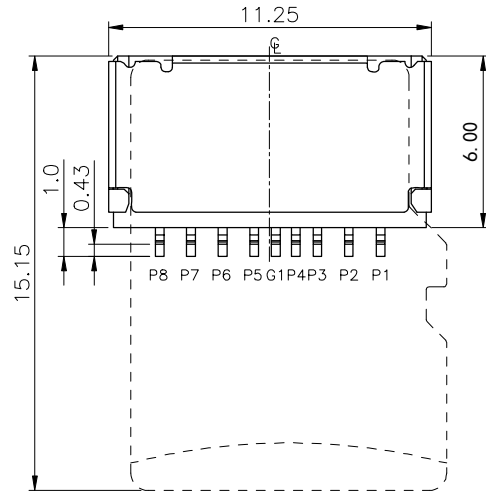

Specification:


1. ELECTRICAL CHARACTERISTICS

- 1-1. CONTACT RESISTANCE: 80 milliohms MAX.
- 1-2. INSULATION RESISTANCE: 1,000 Megohms MIN.
- 1-3. DIELECTRIC WITHSTANDING VOLTAGE: 500V AC FOR 1 MINUTE.


2. MECHANICAL CHARACTERISTICS

- 2-1. DURABILITY: 3,000 CYCLES
- 3. RoHS 2002/95/EC COMPLIANT.

Pin No.	Pin assignment
PIN1	DAT2
PIN2	CD/DAT3
PIN3	CMD
PIN4	VDD
G1	SWITCH
PIN5	CLK
PIN6	VSS
PIN7	DAT0
PIN8	DAT1

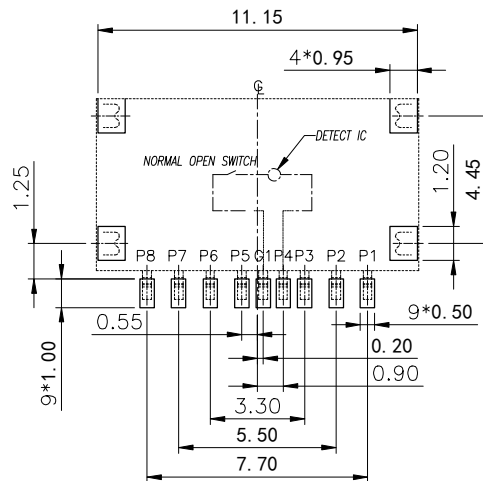

RECOMMEND PCB LAYOUT  
(TOLERANCE: ±0.05)

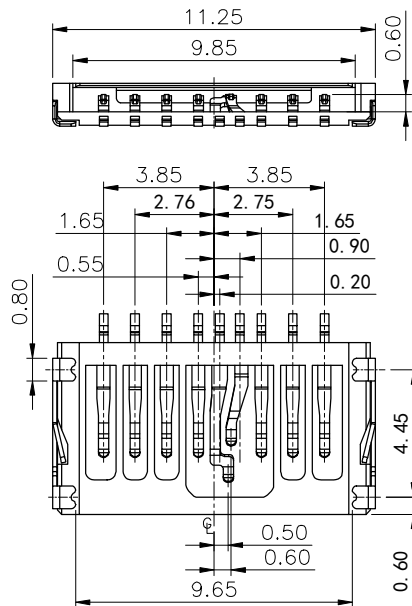

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS: ANGLES:  
X :±0.25 X :±5°  
X.X :±0.15 X.X :±3°  
X.XX :±0.05



东莞市汉博电子科技有限公司  
DONGGUAN HANBO TECHNOLOGY CO., LTD

TITLE	T-FLASH CONN 9P SIMPLE SOCKET (With Detect)			
DWN	xiong	PART NO. TF-018B-H15		
CHKD	lee	SCALE:1:1	UNIT: mm	
APVD	wang	SIZE: A4	SHEET:10F 1	REV: A4

CUSTOMER COPY