
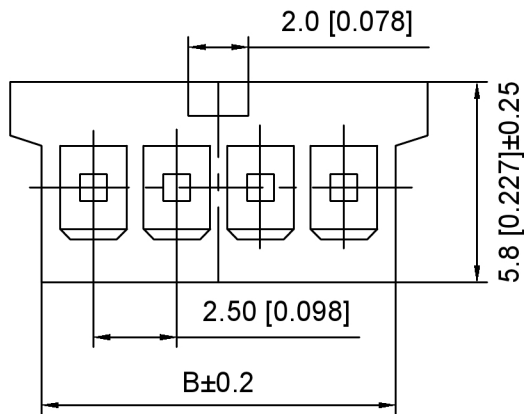
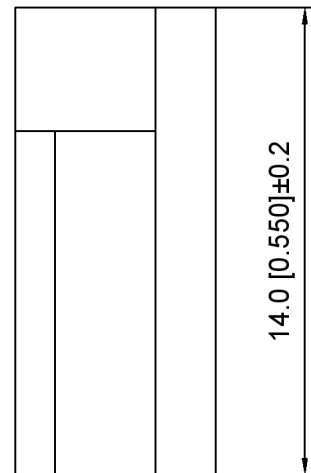


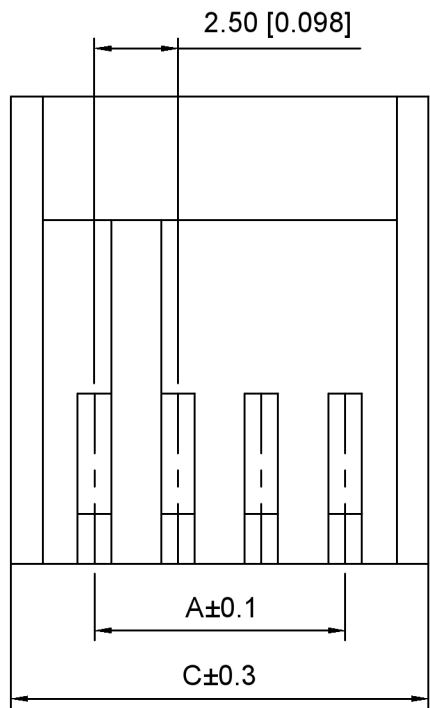

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1000V AC/minute

耐受电压: 1000V AC/分钟

Temperature range:-25℃--+85℃

温度范围: -25℃--+85℃

Insulation resistance:1000MΩ min

绝缘电阻: 1000MΩ Min

Contact resistance:20mΩ Max

接触电阻: 20mΩ Max

X2511 H - XX - N0

① ② ③ ④

1.Series No

2.Category:H-HSG

3.Row No.Pin No:XX-02~12P

4.Material:N0-Nylon66 94V-0

Poles	Dimensions(mm)		
	A	B	C
02	2.50	5.60	7.30
03	5.00	8.10	9.80
04	7.50	10.60	12.30
05	10.00	13.10	14.80
06	12.50	15.60	17.30
07	15.00	18.10	19.80
08	17.50	20.60	22.30
09	20.00	23.10	24.80
10	22.50	25.60	27.30
11	25.00	28.10	29.80
12	27.50	30.60	32.30

X2511H-XX-N0	Nylon66	X2511W	X2511T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

DSND		SCALE: N/A	MODEL TYPE: 2.5mm Crimp Style Connector
DWN		VIEW: 	PART NO.: X2511H-XX-N0
CHKD		UNIT: mm/in	DWG NO.: X-X2511H-XX-N0
APPD		SIZE: A4	

XKLB

XKB INDUSTRIAL PRECISION CO.,LIMITED

WEIGHT	SHEET	REVISION
	1/1	A0

广东星坤科技股份有限公司	
审核	日期
设计	
文件工程章	

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
	REVISIONS				
					ANGULAR ±5°
					L≤ 4 ±0.2
					4<L≤ 16 ±0.3
					16<L≤ 63 ±0.4
					L> 63 ±0.5