

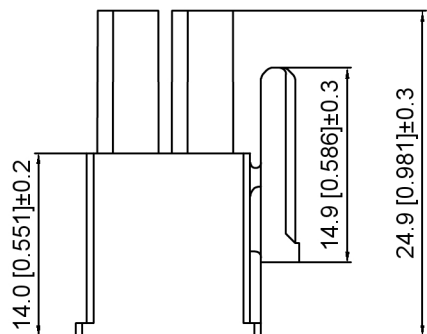


Specifications:  
 规格:  
 Voltage rating:600V AC/DC  
 额定电压: 600V AC/DC  
 Current rating:23A AC/DC  
 额定电流: 23A AC/DC  
 Withstanding voltage:2200V AC/minute  
 耐受电压: 2200V AC/分钟  
 Temperature range:-40°C+105°C  
 温度范围: -40°C+105°C  
 Insulation resistance:≥1000MΩ  
 绝缘电阻: ≥1000MΩ  
 Contact resistance:≤2mΩ  
 接触电阻: ≤2mΩ

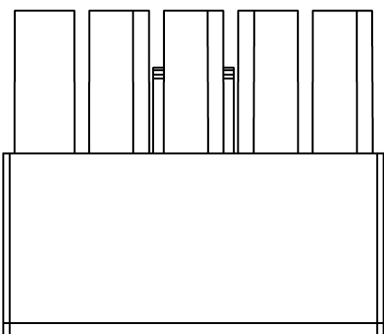

X5700 H - 2xXX - N0  
 ① ② ③ ④

- 1.Series No
- 2.Category:H-HSG
- 3.Row No.Pin No:2xXX-2x01~2x06P
- 4.Material:N0-PA66 94V-0 Black

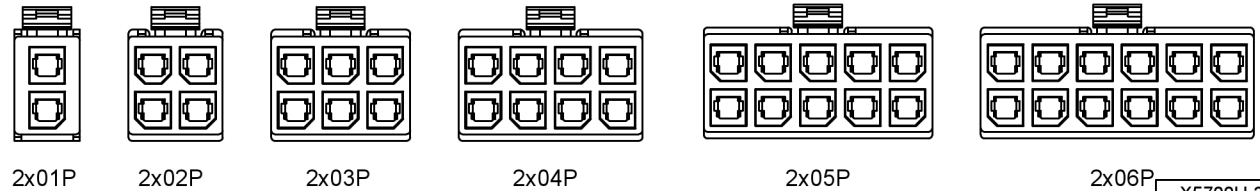

Poles	Dimensions(mm)
	A
2x01	8.35
2x02	12.05
2x03	17.75
2x04	23.45
2x05	29.15
2x06	34.85

X5700H-2xXX-N0	PA66	X5700W	X5700T
PART NO	Material	Suitable XKB Wafer	Suitable XKB Terminal

广东星坤科技股份有限公司

MARK	DESCRIPTION	DATE	REVISED	APPROVED	UNSPECIFIED TOLERANCES
Δx					ANGULAR ±5°
Δx					L ≤ 4 ±0.2
Δx					4 < L ≤ 16 ±0.3
					16 < L ≤ 63 ±0.4
					L > 63 ±0.5



DSND		SCALE: N/A	MODEL TYPE: 5.7mm Crimp Style Connector
DWN		VIEW:	PART NO.: X5700H-2xXX-N0
CHKD		UNIT: mm/in	DWG NO.: X-X5700H-2xXX-N0
APPD		SIZE: A4	

文件工程章