
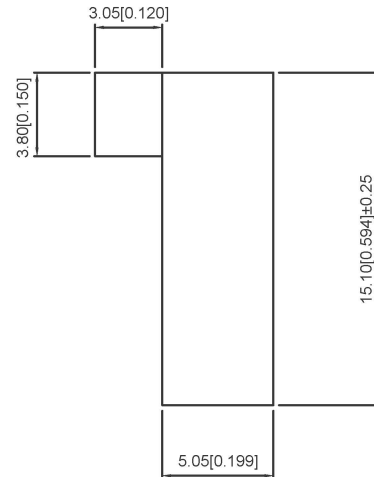
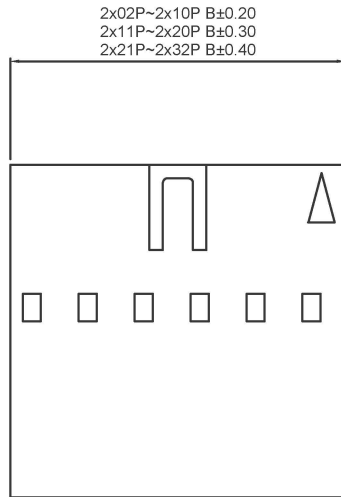


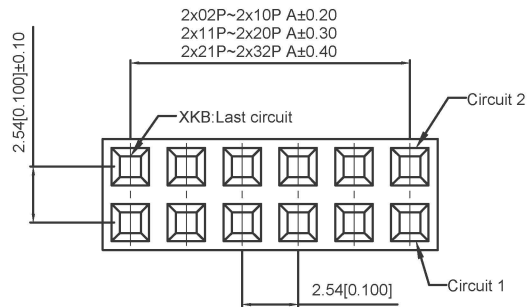

Specifications:

规格:

Voltage rating:250V AC/DC

额定电压: 250V AC/DC

Current rating:3A AC/DC

额定电流: 3A AC/DC

Withstanding voltage:1500V AC/minute

耐受电压: 1500V AC/分钟

Temperature range:-25℃~+85℃

温度范围: -25℃~+85℃

Insulation resistance:≥1000MΩ

绝缘电阻: ≥1000MΩ

Contact resistance:≤20mΩ

接触电阻: ≤20mΩ

After environmental testing:≤30mΩ

环境测试后: ≤30兆欧

X9555 H X-2xXX E2-PT XX

① ②③ ④ ⑤ ⑥ ⑦

1.Series No

2.Category:H-HSG

3.Welding Board Angle:Blank-ordinary

4.Row No-Pin No:2xXX-2x02P~2x32P

5.Special No:

E2-With single convex point,Thickness=5.05mm

6.Material:PT-PBT 94V-0

6.Color:Blank-Natural Color

poles	Dimensions(mm)		poles	Dimensions(mm)		poles	Dimensions(mm)	
	A	B		A	B		A	B
2x02	2.54	5.08	2x13	30.48	33.02	2x24	58.42	60.96
2x03	5.08	7.62	2x14	33.02	35.56	2x25	60.96	63.50
2x04	7.62	10.16	2x15	35.56	38.10	2x26	63.50	66.04
2x05	10.16	12.70	2x16	38.10	40.64	2x27	66.04	68.58
2x06	12.70	15.24	2x17	40.64	43.18	2x28	68.58	71.12
2x07	15.24	17.78	2x18	43.18	45.72	2x29	71.12	73.66
2x08	17.78	20.32	2x19	45.72	48.26	2x30	73.66	76.20
2x09	20.32	22.86	2x20	48.26	50.80	2x31	76.20	78.74
2x10	22.86	25.40	2x21	50.08	53.34	2x32	78.74	81.28
2x11	25.40	27.94	2x22	53.34	55.88			
2x12	27.94	30.48	2x23	55.88	58.42			

X9555H-2xXXE2-PT	PBT UL 94V-0	X9555T-A	X9555W
PART NO	Material	Suitable XKB Terminal	Suitable XKB Terminal

广东星坤科技股份有限公司			
生		日期	
ΔX		ΔX	
ΔX		ΔX	
MARK	文件工程章	DESCRIPTION	REVISIONS
		DATE	REVISED
		APPROVED	UNSPECIFIED TOLERANCES
		www.xk-dg.cn www.helloxkb.com www.helloxkb.cn	

DSND		DATE		SCALE: N/A	MODEL TYPE: Wire to board connector
DWN		DATE		VIEW:	PART NO.: 2.54mm Crimp Style Connectors
CHKD		DATE		UNIT: mm/in	DWG NO.: X9555H-2xXXE2-PT
APPD		DATE		SIZE: A4	
XKB INDUSTRIAL PRECISION CO.,LIMITED					WEIGHT 1.0g
					SHEET 1/1
					REVISION A0