

适配器 - HC-B-TA-M32-ER-AL - 1414258


Please be informed that the data shown in this PDF Document is generated from our Online Catalog. Please find the complete data in the user's documentation. Our General Terms of Use for Downloads are valid (<http://download.phoenixcontact.com>)



适配器，铝制，用于EVO外壳，M32螺纹



关键商业数据

包装单位	1 STK
GTIN	 4 055626 022208
GTIN	4055626022208
Sales Key	BF7AAF

技术数据

尺寸

内螺纹长度	13 mm
-------	-------

环境条件

保护等级	4 (UL 50e)
	4X (UL 50e)
	12 (UL 50e)
环境温度 (运行)	-40 °C ... 125 °C

概述

标识材料	压铸铝，抗腐蚀
外壳材料	压铸铝，抗腐蚀
密封侧螺纹类型	M32
扭矩	18 Nm (螺钉连接的拧紧扭矩)

Environmental Product Compliance

China RoHS	环保使用期限：无限期 = EFUP-e
------------	---------------------

适配器 - HC-B-TA-M32-ER-AL - 1414258


技术数据

Environmental Product Compliance

	无超标的有害物质
--	----------

产品图

尺寸图

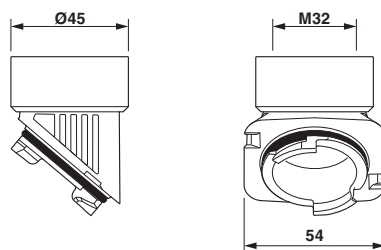

尺寸图

认证

认证

认证

UL认证 / cUL认证 / EAC / GL / cULus认证

防爆认证

认证详情

UL认证		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
------	--	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------

cUL认证		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	E255026
-------	--	-------------------------------------------------------------------------------------------------------------------------------------------------------	---------

EAC			RU C- DE.AI30.B.01102
-----	--	--	--------------------------

适配器 - HC-B-TA-M32-ER-AL - 1414258

认证

GL		http://exchange.dnv.com/tari/	6196614 HH
----	--	---------------------------------------------------------------------------	------------

cULus认证		http://database.ul.com/cgi-bin/XYV/template/LISEXT/1FRAME/index.htm	
---------	--	-------------------------------------------------------------------------------------------------------------------------------------------------------	--

附件

附件

全螺钉连接

电缆密封 - G-INS-M32-S68N-NNES-S - 1424528



电缆密封, 螺钉连接材料: 镀镍铜, 电缆外径 13 mm ... 18 mm, 屏蔽: 无, 连接螺纹: M32 x 1.5, 颜色: 银色, 带O型圈

电缆密封 - G-INS-M32-M68N-NNES-S - 1411166



电缆密封, 螺钉连接材料: 镀镍铜, 电缆外径 15 mm ... 21 mm, 屏蔽: 无, 连接螺纹: M32 x 1.5, 颜色: 银色, 带O型圈

电缆密封 - G-INSEC-M32-M68N-NCRS-S - 1411191



电缆密封, 螺钉连接材料: 镀镍铜, 电缆外径 14 mm ... 21 mm, 屏蔽: 有, 连接螺纹: M32 x 1.5, 颜色: 银色, 带O型圈

电缆密封 - G-INS-M32-M68N-SNES-S - 1424545



电缆密封, 螺钉连接材料: 优质钢 1.4305, 电缆外径 15 mm ... 21 mm, 屏蔽: 无, 连接螺纹: M32 x 1.5, 颜色: 银色, 带O型圈

