

RoHS

版本 REV	变更事项 CHANGE CONTENT	依据 REFERENCE	变更日期 DATE
A0			

技术要求:
Technical requirement

一. 电气性能:

electrical performance

1-1. 额定电流: 2A AC DC.

rated current: 2A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$

Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$

Insulation resistance: $\geq 1000M\Omega$

1-4. 耐 压: 550V AC/Minute

withstand voltage: 550V AC/Minute

二. 物理特性:

Physical characteristics

2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$

environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max

welding temperature: $+260^{\circ}C$, 10s max

三. 材质:





Material

3-1. 塑胶: PA6T (Black) UL94V-0

plastic: PA6T (Black) UL94V-0

3-2. 插针: 磷铜/镀金

pin: Brass/Gold plated

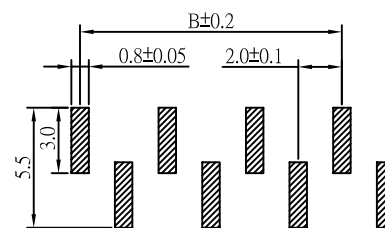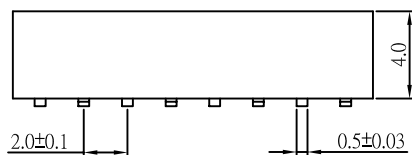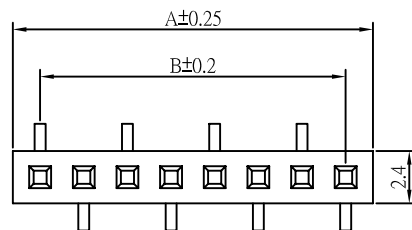

P.C.B LAYOUT

PIN	A	B
1x2A	4.50	2.00
1x3A	6.50	4.00
1x4A	8.50	6.00
1x5A	10.50	8.00
1x6A	12.50	10.00
1x7A	14.50	12.00
1x8A	16.50	14.00
1x9A	18.50	16.00
1x10A	20.50	18.00
1x11A	22.50	20.00
1x12A	24.50	22.00
1x13A	26.50	24.00
1x14A	28.50	26.00
1x15A	30.50	28.00
1x16A	32.50	30.00
1x17A	34.50	32.00
1x18A	36.50	34.00
1x19A	38.50	36.00
1x20A	40.50	38.00
1x21A	42.50	40.00
1x22A	44.50	42.00
1x23A	46.50	44.00
1x24A	48.50	46.00
1x25A	50.50	48.00
1x26A	52.50	50.00
1x27A	54.50	52.00
1x28A	56.50	54.00
1x29A	58.50	56.00
1x30A	60.50	58.00
1x31A	62.50	60.00
1x32A	64.50	62.00
1x33A	66.50	64.00
1x34A	68.50	66.00
1x35A	70.50	68.00
1x36A	72.50	70.00
1x37A	74.50	72.00
1x38A	76.50	74.00
1x39A	78.50	76.00
1x40A	80.50	78.00

3	包装	<input type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input checked="" type="checkbox"/> 盒装	1	PCS
2	塑胶	PH2.0*4.0 W2.4mm 1*nP PA6T料	1	PCS
1	端子	2.0x4.3mm W6.5mm SMT 磷铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

	单位	mm	泰华电子有限公司 TaiHua Electronics Co., Ltd	
	比例	SCALE		
x. ±0.5	x.*±	核准:	版本: A0	产品名称 Production name
.x ±0.30	.x *±	APPROVED BY	页次: 1/1	产品料号 Production No
.xx ±0.20	.xx *±	审核:	日期:	客户料号 Client No
.xxx ±0.005	.xxx *±	CHECKED BY		
		制图: 吕灿东		
		DRAWN BY		