

RoHS

版本 REV	变更事项 CHANGE CONTENT	依据 REFERENCE	变更日期 DATE
A0			

技术要求:
Technical requirement

一. 电气性能:
electrical performance

1-1. 额定电流: 2A AC DC.
rated current: 2A AC DC.

1-2. 接触电阻: $\leq 20m\Omega$
Contact resistance: $\leq 20m\Omega$

1-3. 绝缘电阻: $\geq 1000M\Omega$
Insulation resistance: $\geq 1000M\Omega$

1-4. 耐压: 550V AC/Minute
withstand voltage: 550V AC/Minute

二. 物理特性:
Physical characteristics




2-1. 环境温度: $-25^{\circ}C \sim 105^{\circ}C$
environmental temperature: $-25^{\circ}C \sim 105^{\circ}C$

2-2. 焊接温度: $+260^{\circ}C$, 10s max
welding temperature: $+260^{\circ}C$, 10s max

三. 材质:
Material

3-1. 塑胶: PA6T(Black) UL94V-0
plastic: PA6T(Black) UL94V-0

3-2. 插针: 黄铜/镀金
pin: Brass/Gold plated

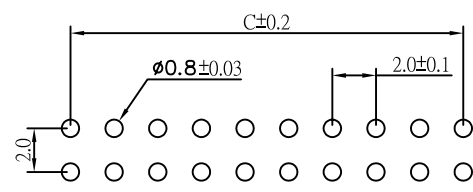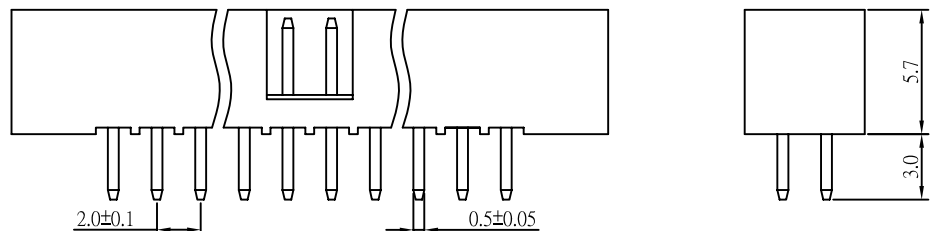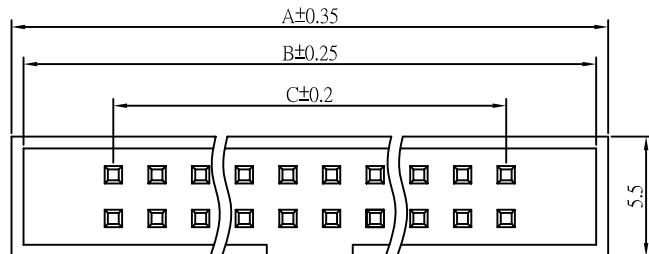

P.C.B LAYOUT

PIN	A	B	C
2x3A	13.30	12.20	4.00
2x4A	15.30	14.20	6.00
2x5A	17.30	16.20	8.00
2x6A	19.30	18.20	10.00
2x7A	21.30	20.20	12.00
2x8A	23.30	22.20	14.00
2x9A	25.30	24.20	16.00
2x10A	27.30	26.20	18.00
2x11A	29.30	28.20	20.00
2x12A	31.30	30.20	22.00
2x13A	33.30	32.20	24.00
2x14A	35.30	34.20	26.00
2x15A	37.30	36.20	28.00
2x16A	39.30	38.20	30.00
2x17A	41.30	40.20	32.00
2x18A	43.30	42.20	34.00
2x19A	45.30	44.20	36.00
2x20A	47.30	46.20	38.00
2x21A	49.30	48.20	40.00
2x22A	51.30	50.20	42.00
2x23A	53.30	52.20	44.00
2x24A	55.30	54.20	46.00
2x25A	57.30	56.20	48.00

3	包装	<input checked="" type="checkbox"/> 袋装 <input type="checkbox"/> 管装 <input type="checkbox"/> 卷装 <input type="checkbox"/> 盒装	1	PCS
2	塑胶	PH2.0*5.7 2*NP PA6T料	1	PCS
1	方针	0.5mm L=8.2 黄铜镀金G/F	/	PCS
ITEM	PART NAME	DESCRIPTION	QUA'Y	UNIT

	单位 UNIT	mm	泰华电子有限公司 TaiHua Electronics Co., Ltd	
	比例 SCALE			
x. ±0.5	x.*±	核准:	版本: A0	产品名称 Production name
. x±0.30	. x*±	APPROVED BY	页次: 1/1	产品料号 Product No
. xx±0.20	. xx*±	CHECKED BY	日期:	客户料号 Client No
. xxx±0.005	. xxx*±	制图: 吕灿东 DRAWN BY		