


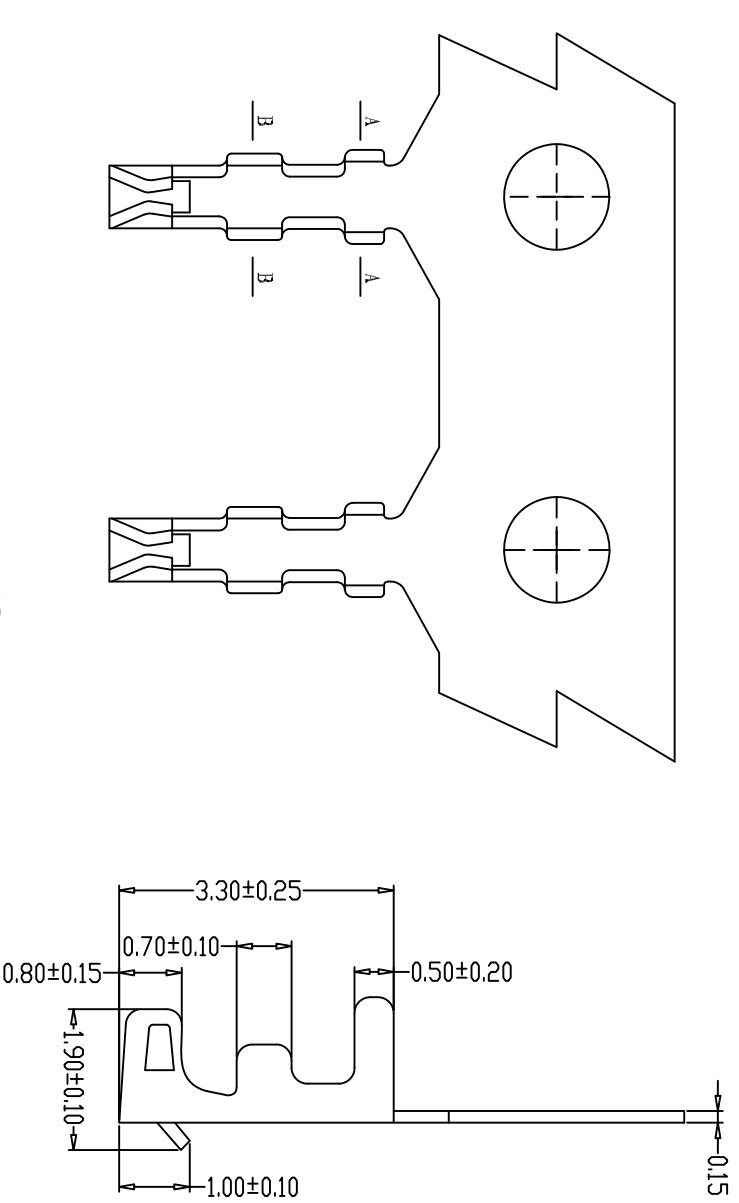

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 125V AC, DC
- 3、Temperatuer Range: -25℃~+85℃
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 100mΩ Min
- 6、Withstanding Voltang: 500V AC/minute
- 7、Material:Phosphoric copper Tin-plated
- 8、Applicable Wire Sizes:AWG#28~32#

A
B
C
D
E
F

1 2 3 4 5 6 7 8

	单位 UNIT	mm	深圳市泰华电子有限公司 <i>TaiHua Electronics Co., Ltd</i>	
	比例 SCALE			
X. ±0.5	X. ±		核准: 版本: A0	产品名称 Product name
. X ±0.30	. X ±		审核: 页次: 1/1	1. 25端子
. XX ±0.20	. XX ±		CHECKED BY	产品料号 Product No
. XXX ±0.005	. XXX ±		制图: 封文辉 DRAW BY 2022.8.31	TH-A1251-T
			日期:	客户料号 Client No