
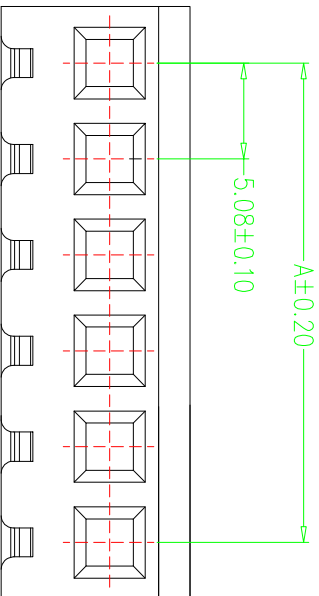
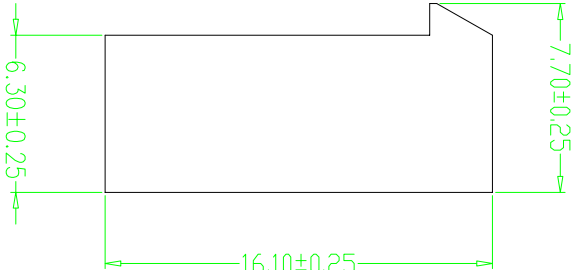


SPECIFICATIONS

- 1、Current Rating: 7A AC, DC
- 2、Voltage Rating: 250V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 1000MΩ Min
- 6、Withstanding Voltage: 1500 AC/minute
- 7、Material: Nylon66, UL94V-0

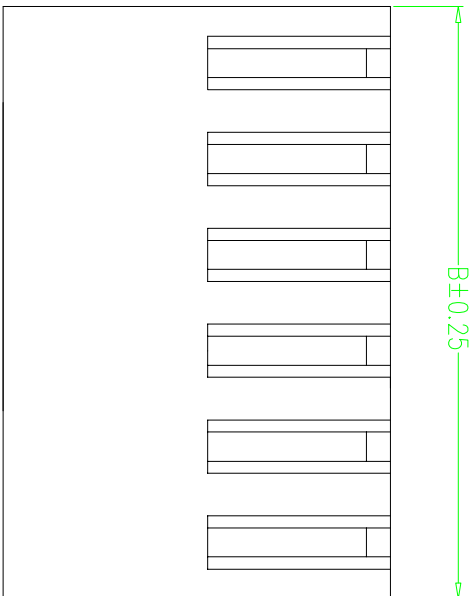

编号	尺寸 (mm)	
	A	B
A5801-02Y	5.08	9.60
A5801-03Y	10.16	14.68
A5801-04Y	15.24	19.76
A5801-05Y	20.32	24.84
A5801-06Y	25.40	29.92
A5801-07Y	30.48	35.00
A5801-08Y	35.56	40.08
A5801-09Y	40.64	45.16
A5801-10Y	45.72	50.24
A5801-11Y	50.80	55.32
A5801-12Y	55.88	60.40
A5801-20Y	96.52	101.04

	单位	mm	<b>泰华电子有限公司</b> <b>TaiHua Electronics Co., Ltd</b>
X ± 0.5	X ± 1		
X ± 0.30	X ± 1		
.XX ± 0.20	.XX ± 1		
.XXX ± 0.005, .XXX ± 1			
核准:	APPROVED BY	版本:	A0
审核:	CHECKED BY	页次:	1/1
制图:	DRAWN BY	日期:	
	2022.3.1	客户料号	TH-A5081-NV
		客户 No	