
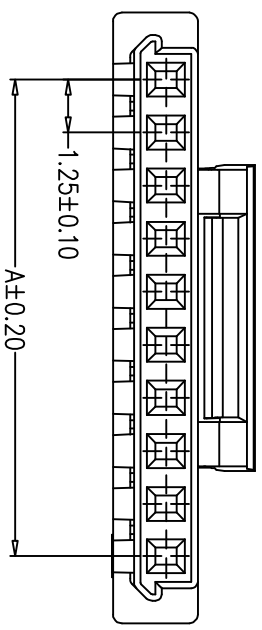
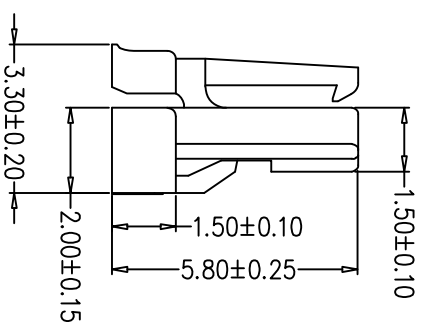


SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 150V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Nylon66, UL94V-0

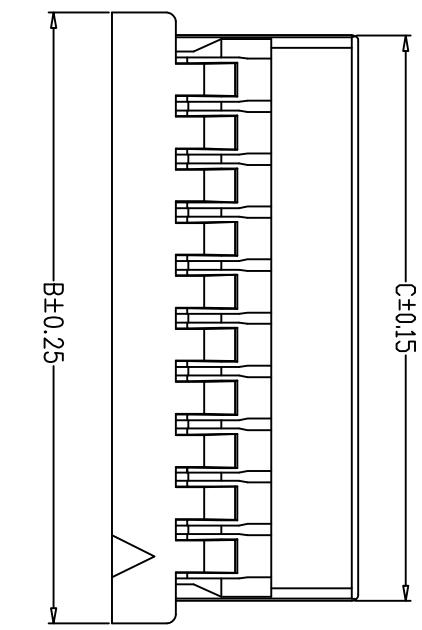

编 号	尺寸 (mm)		
	A	B	C
A1257-02Y	1.25	4.40	3.35
A1257-03Y	2.50	5.65	4.60
A1257-04Y	3.75	6.90	5.85
A1257-05Y	5.00	8.15	7.10
A1257-06Y	6.25	9.40	8.35
A1257-07Y	7.50	10.65	9.60
A1257-08Y	8.75	11.90	10.85
A1257-09Y	10.00	13.15	12.10
A1257-10Y	11.25	14.40	13.35
A1257-11Y	12.50	15.65	14.60
A1257-12Y	13.75	16.90	15.85
A1257-30Y	36.25	39.40	38.35

单位 UNIT	mm	深圳市泰华电子有限公司 TaiHua Electronics Co., Ltd
比例 SCALE	1:1	产品名称 Product name
核准: APPROVED BY		版本: REV
审核: CHECKED BY		页次: PAGE
制图: DRAWN BY		日期: DATE
		客户编号 Client No