



- SPECIFICATIONS**
- 1、Current Rating: 3A AC, DC
 - 2、Voltage Rating: 250V AC, DC
 - 3、Temperature Range: -25°C~+85°C
 - 4、Contact Resistance: 20mΩ Max
 - 5、Insulation Resistance: 1000 MΩ Min
 - 6、Withstanding Voltage: 1000V AC/minute
 - 7、Material: Nylon66, UL94V-0

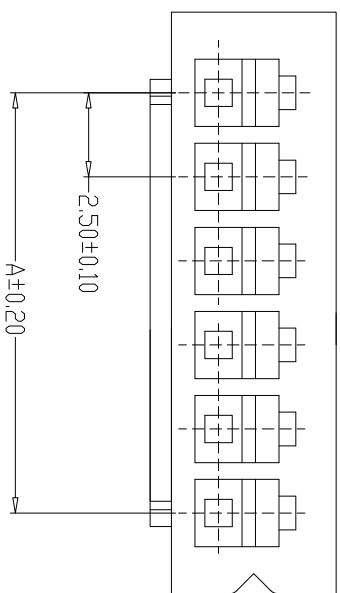

编号	尺寸 (mm)	
	A	B
A2501-02Y	2.50	7.50
A2501-03Y	5.00	10.00
A2501-04Y	7.50	12.50
A2501-05Y	10.00	15.00
A2501-06Y	12.50	17.50
A2501-07Y	15.00	20.00
A2501-08Y	17.50	22.50
A2501-09Y	20.00	25.00
A2501-10Y	22.50	27.50
A2501-11Y	25.00	30.00
A2501-12Y	27.50	32.50
A2501-20Y	47.50	52.50

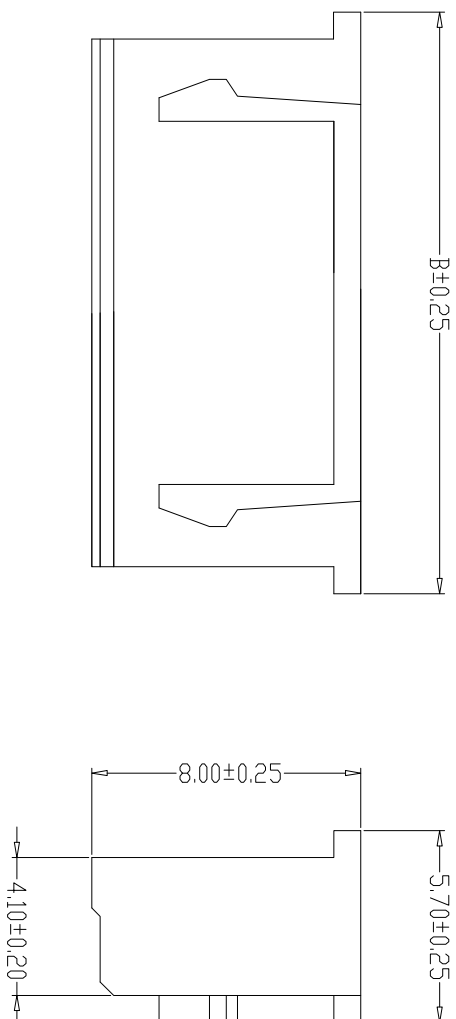

$x. \pm 0.5$	$x^{\circ} \pm$
$.x \pm 0.30$	$.x^{\circ} \pm$
$.xx \pm 0.20$	$.xx^{\circ} \pm$
$.xxx \pm 0.005$	$.xxx^{\circ} \pm$

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

单位 UNIT	mm	版本: A0	产品名称 Production name	1JC3孔座
比例 SCALE		核准: APPROVED BY	图: DRAWN BY	
		审核: CHECKED BY	日期: DATE	
		封装: PACKAGE	封文: DRAWN BY	2022.9.6
		物料: MATERIAL	客户料号 Client No	