

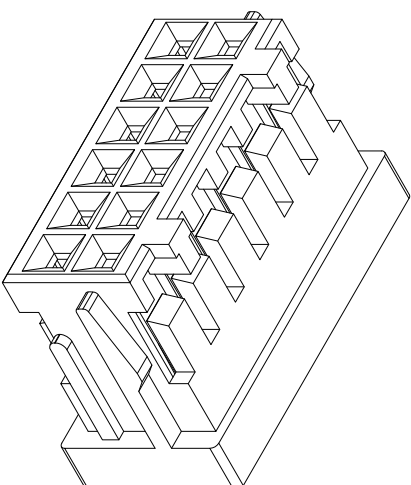
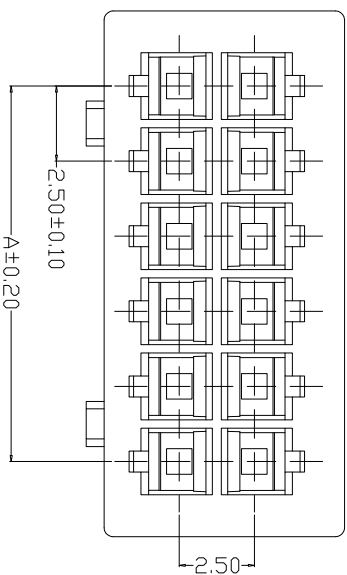
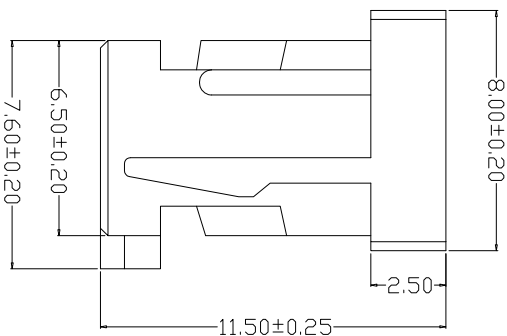


- SPECIFICATIONS**
- 1、 Current Rating: 3A AC, DC
  - 2、 Voltage Rating: 250V AC, DC
  - 3、 Temperature Range: -25°C~+85°C
  - 4、 Contact Resistance: 30mΩ Max
  - 5、 Insulation Resistance: 1000MΩ Min
  - 6、 Withstanding Voltage: 800V AC/minute
  - 7、 Material: Housing PA66, UL94V-0

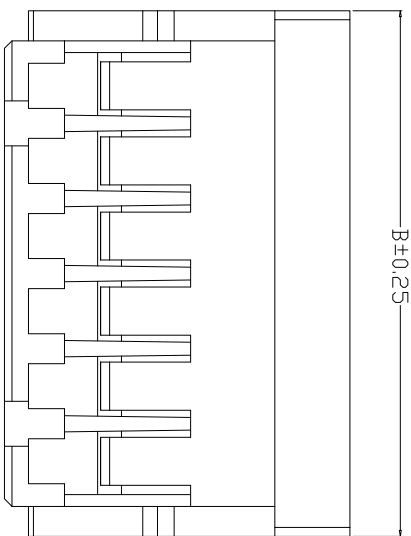

编 号	尺寸 (mm)	
	A	B
A2557-2*02Y	2.50	7.50
A2557-2*03Y	5.00	10.00
A2557-2*04Y	7.50	12.50
A2557-2*05Y	10.00	15.00
A2557-2*06Y	12.50	17.50
A2557-2*07Y	15.00	20.00
A2557-2*08Y	17.50	22.50
A2557-2*09Y	20.00	25.00
A2557-2*10Y	22.50	27.50
A2557-2*11Y	25.00	30.00
A2557-2*12Y	27.50	32.50
A2557-2*20Y	47.50	52.50



X. ±0.5	X*±
.X±0.30	.X*±
.XX±0.20	.XX*±
.XXX±0.008	.XXX*±

单位 UNIT	mm
比例 SCALE	
批准: APPROVED BY	版本: A0
审核: CHECKED BY	页次: 1/1
制图: DRAWN BY	日期:
封文辉	客户料号 Client No

**深圳市泰华电子有限公司**  
**TaiHua Electronics Co., Ltd**

产品名称  
Production name

XHD2-5孔座

产品料号  
Product No

TH-A2557-2\*XY

客户料号  
Client No