


PCB LAYOUT

编号	尺寸 (mm)	
	A	B
A1500-02AWD	1.50	4.50
A1500-03AWD	3.00	6.00
A1500-04AWD	4.50	7.50
A1500-05AWD	6.00	9.00
A1500-06AWD	7.50	10.50
A1500-07AWD	9.00	12.00
A1500-08AWD	10.50	13.50
A1500-09AWD	12.00	15.00
A1500-10AWD	13.50	16.50
A1500-11AWD	15.00	18.00
A1500-12AWD	16.50	19.50
A1500-20AWD	28.50	31.50

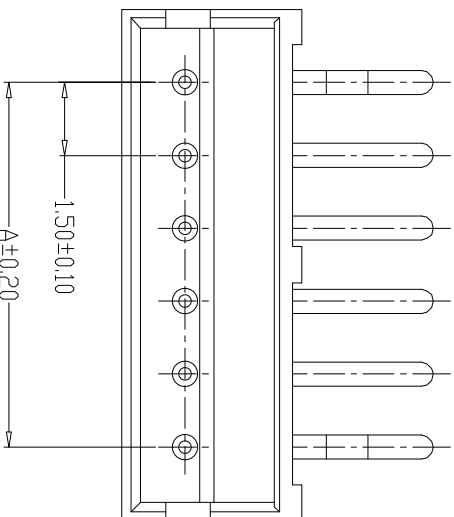

单位
UNIT

mm

比例
SCALE

X. ±0.5 X* ±

. X ±0.30 X* ±

. XX ±0.20 . XX* ±

. XXX ±0.008 . XXX* ±

批准:
APPROVED BY

审核:
CHECKED BY

制图:
DRAWN BY

封文辉

深圳市泰华电子有限公司
TaiHua Electronics Co., Ltd

版本: A0 产品名称: Production name

页次: 1/1 产品料号: Product No

日期: 客户料号: Client No

ZH定位弯针 WAFER DIP TYPE

TH-A1500-NAWD

SPECIFICATIONS

- 1、Current Rating: 1A AC, DC
- 2、Voltage Rating: 100V AC, DC
- 3、Temperature Range: -25°C~+85°C
- 4、Contact Resistance: 20mΩ Max
- 5、Insulation Resistance: 500MΩ Min
- 6、Withstanding Voltage: 500V AC/minute
- 7、Material: Wafer PA46, UL94V-0
PIN Brass Tin-plated

版本 REV	变更日期 CHANGE DATE	变更理由 REASON
00		