




THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION

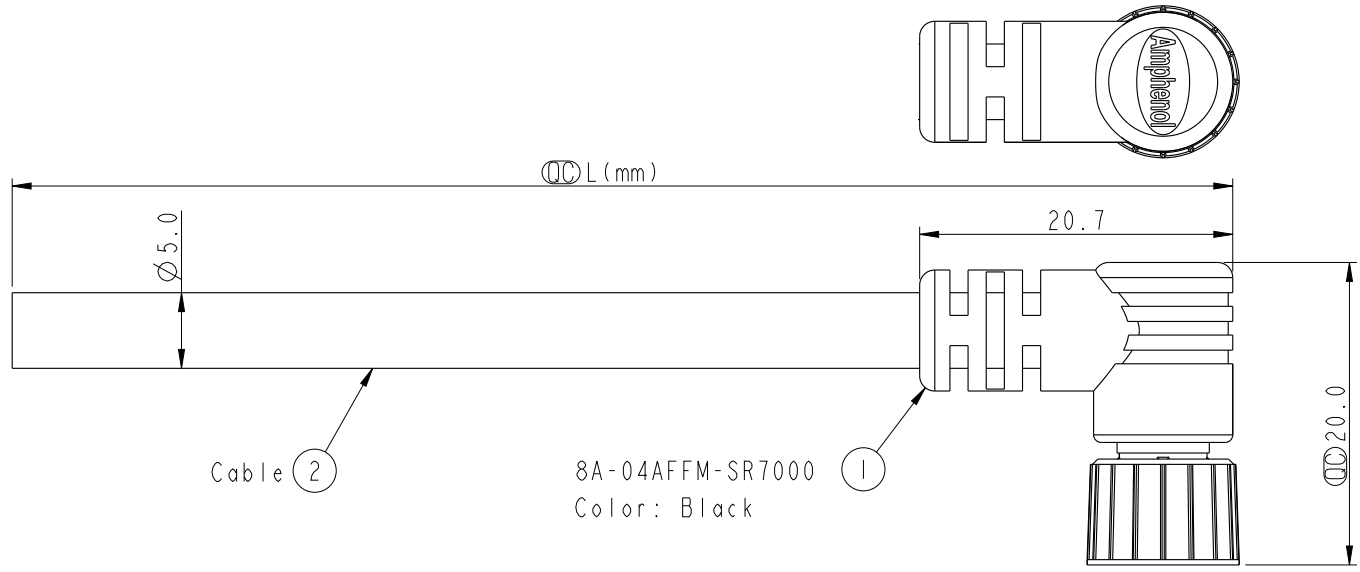


8A-04AFFM-SR7000  
Color: Black

8A-04AFFM-SR7AXX  
XX: 01~99Meters  
01: 01Meter  
02: 02Meter  
:  
:  
99: 99Meters  
Cable Length(L): 01~99Meters



Conn.

- Note:
- \*  $\varnothing$  Important Dimension.
  - \* Waterproof Rate: IP67.
  - \* Connector: PU, Black.
  - \* Female Pin: Copper Alloy, Gold Plated.
  - \* Screw Nut: Zinc Alloy, Nickel Plated.
  - \* O-Ring: Viton, Green.
  - \* Cable: UL2464 22AWG\*4C+Talcum, PVC Jacket, UV Resistant, OD=5.0, Black.
  - \* Cable Length Tolerance: 01M:  $\pm 40$ mm  
02~05M:  $\pm 60$ mm  
06~10M:  $\pm 100$ mm  
11~30M:  $\pm 200$ mm  
31~99M:  $\pm 500$ mm



Pin Assignments  
Front View

Pin	Wire Color	Pin Out
4	Black 黑	
3	Blue 藍	
2	White 白	
1	Brown 棕	
Conn.	Wire Color	Pin Out

UNIT:mm TOLERANCE $\pm 0.5$ mm	TITLE M8 4Pin Cable F Conn. F Pin			Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Mila	DATE 2014-01-09
	SCALE 2:1	SIZE A4	SHEET 1 OF 1		DWG NO 8A-04AFFM-SR7AXX	CHECKED BY Jimmy	DATE 2014-01-09
	REV. A	WC-REV. A.3	$\varnothing$ : Inspection item		CUSTOMER ALTW	APPROVED BY Jerry	DATE 2014-01-09