
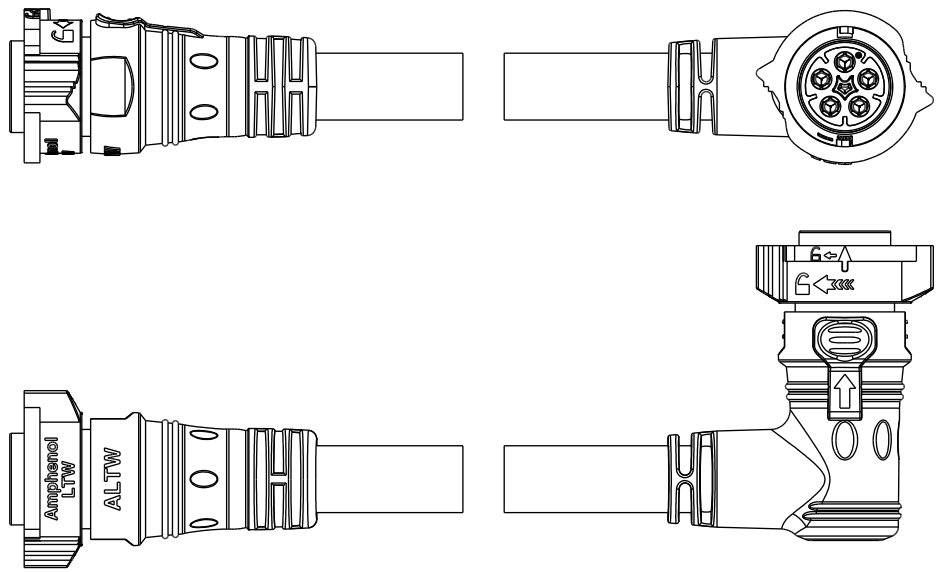


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A		2020/01/13	Ruru	Initial Released

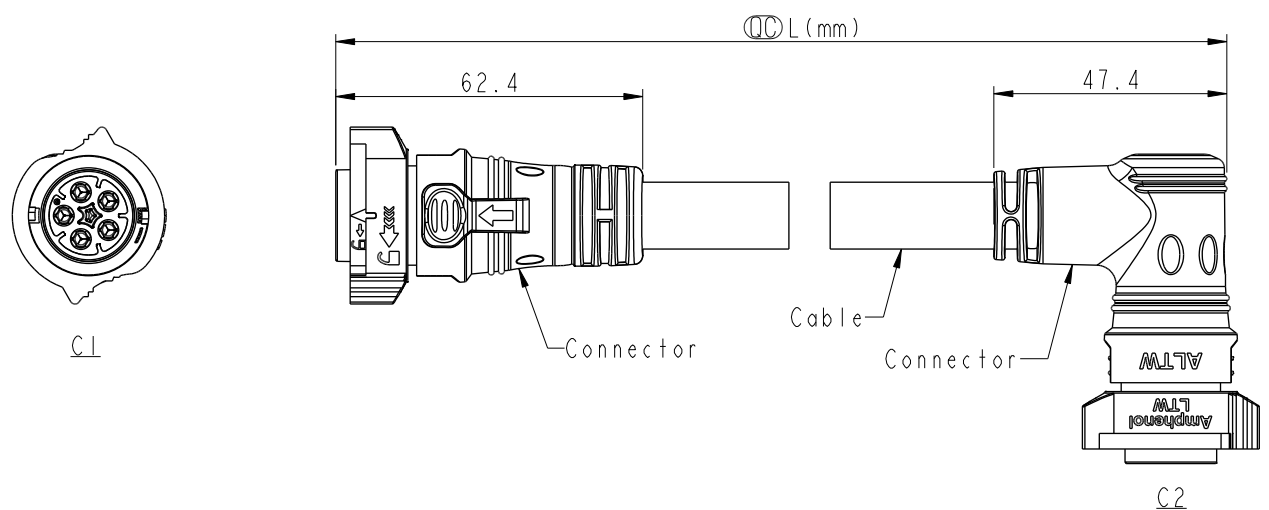

Note:

- \*  $\text{⌀}$  Important Dimension.
- \* Waterproof Rate: IP68, Mated.  
IP68: 1M depth of water in 24 hours.
- \* Connector: Thermoplastic, Black.
- \* Pin: Copper Alloy, Gold Plated.
- \* Cable: SJTW, PVC Jacket, Black.
- \* Cable Length Tolerance:
  - 0.5M: +60/-0mm
  - 01M: +60/-0mm
  - 02~03M: +120/-0mm
  - 04~05M: +160/-0mm
  - 06~10M: ±100mm
  - 11~20M: ±200mm
  - 21~30M: ±300mm
  - 31~99M: ±500mm

UNIT:mm	$\text{⌀}$	$\text{⌒}$
TOLERANCE	±0.5 mm	

TITLE ACC, XLOK, D-20A, DB-ENDED FF		
SCALE 1:2	SIZE A4	SHEET 1 OF 2
REV. A	WC-REV.	$\text{⌀}$ : Inspection item

**Amphenol LTW**  
安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-01-13
DWG NO. AB-DCXXBL-DCBR-QEXXX	CHECKED BY Rita	DATE 2020-01-13
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-01-13

