


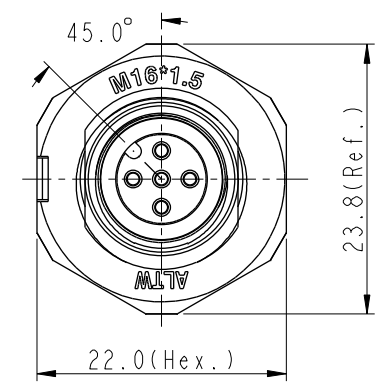
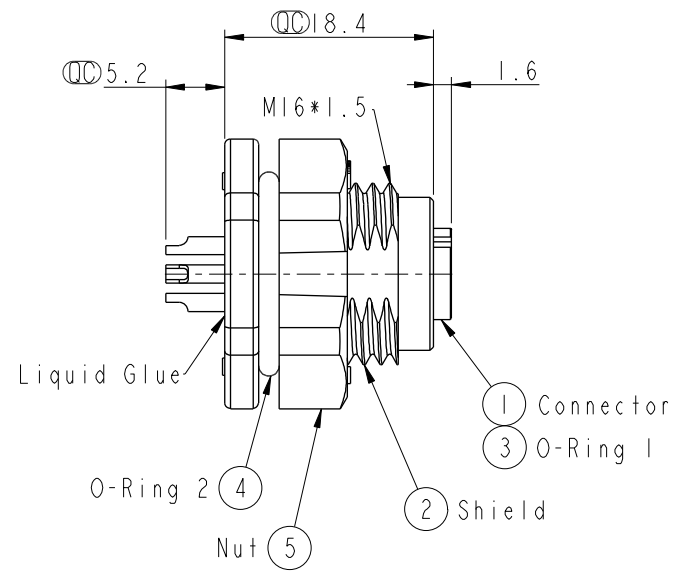



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Release	2017/03/31	Frank Deng	Change Rev.01 To Rev.A
B	LEN1770185	2017/07/03	Frank Deng	Change Note
C	CI90517	2019/04/09	Vicky	Change Note



Pin Assignments
Front View



Recommended
Panel Cut-Out

- Note:**
- * $\varnothing$ Important Dimension To Check
 - * Waterproof Rate: IP68, Unmated.
In 1 meter water within 24 hours
 - * Connector: Thermoplastic, Black.
 - * Pin: Copper Alloy, Gold Plated.
 - * Shield: Thermoplastic, Black.
 - * O-Ring 1: Rubber, Gray
 - * O-Ring 2: Rubber, Gray
 - * Nut: Thermoplastic, Black.
 - * For Panel Thickness Max 4.9mm
 - * Nut are packed separately in PE bags.

UNIT:mm		TITLE NMEA2000, MICRO-C, PANEL,SOLDER 5PIN, M CONN M PIN, PLASTIC		Amphenol LTW		ITEM NO HPC-05PFFS-SF8001	DRAWN BY Vicky	DATE 2019-04-09
TOLERANCE .X ±0.25 .XX ±0.1 .XXX ±0.05 ANGLES ±1°		SCALE 3:2	SIZE A4	SHEET 1 OF 1	DWG NO HPC-05PFFS-SF8001		CHECKED BY Rita	DATE 2019-04-09
REV. C		WC-REV. A.2	$\varnothing$ Inspection item		CUSTOMER ALTW		APPROVED BY Max	DATE 2019-04-09
				安費諾亮泰企業股份有限公司				8 W10814-03-0001A2