
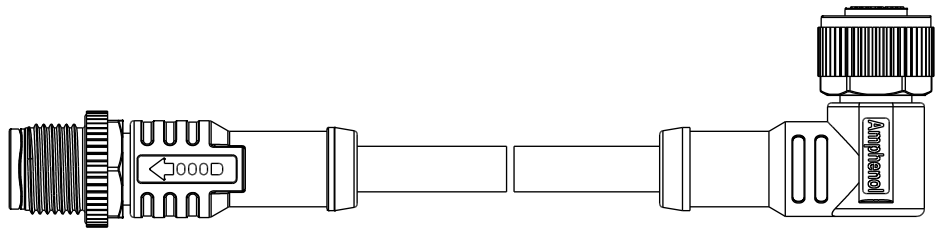
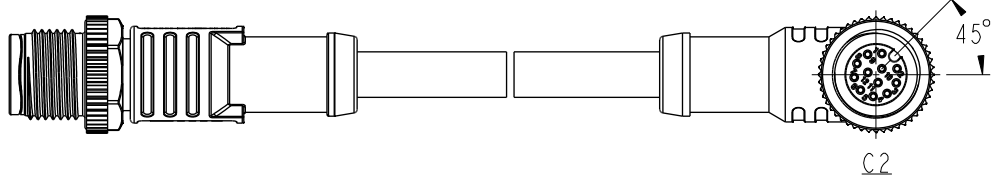



THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

| REV. | ECN NO. | DATE | SIGN | DESCRIPTION |
|------|--------------|------------|-------|------------------|
| B | C201759 & 60 | 2020/11/17 | Vicky | \triangle_B X4 |
| C | C210231 | 2021/04/06 | Vicky | \triangle_C X4 |

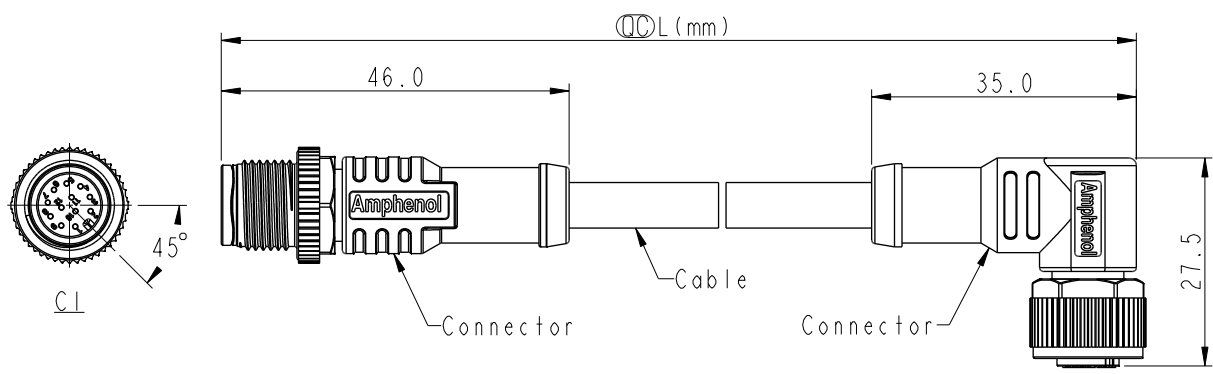

Note:

- * RoHS Compliant
- * \varnothing Important dimension
- * C1
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
- * C2
Waterproof rate: IPX8, mated 1m/24h
IPX9K, mated
Housing: Thermoplastic, Black
Pin: Copper alloy, Gold plated
O-Ring: Rubber, Green
Nut: Thermoplastic, Black
Outer Mold: Thermoplastic, Black
- * Cable: UL2517, PVC Jacket, Black
- * Cable Length Tolerance:

| | |
|---------------|--------------|
| 0.5M < L ≤ 1M | : +60/-0 mm |
| 1M < L ≤ 3M | : +120/-0 mm |
| 3M < L ≤ 5M | : +160/-0 mm |
| 5M < L ≤ 10M | : ±100 mm |
| 10M < L ≤ 20M | : ±200 mm |
| 20M < L ≤ 30M | : ±300 mm |
| 30M < L ≤ 99M | : ±500 mm |

| | | | |
|-----------|--------------|---------------|--|
| UNIT: mm | | TITLE | ACC, SEN, A Code, DB-ENDED \triangle_C |
| TOLERANCE | ± 0.5 mm | SCALE | 1:2 |
| | | SIZE | A4 |
| | | SHEET | 1 OF 2 |
| | | REV. | C |
| | | WC-REV. | |
| | | \varnothing | Inspection item |

Amphenol LTW
安費諾亮泰企業股份有限公司

| | | |
|------------------------------------|-------------|------------|
| ITEM NO | DRAWN BY | DATE |
| | Ruru | 2018-12-06 |
| DWG NO | CHECKED BY | DATE |
| \triangle_B MSAPXXML-SAPFR-SDXXX | Rita | 2018-12-06 |
| CUSTOMER | APPROVED BY | DATE |
| ALTW | Max | 2018-12-06 |

