


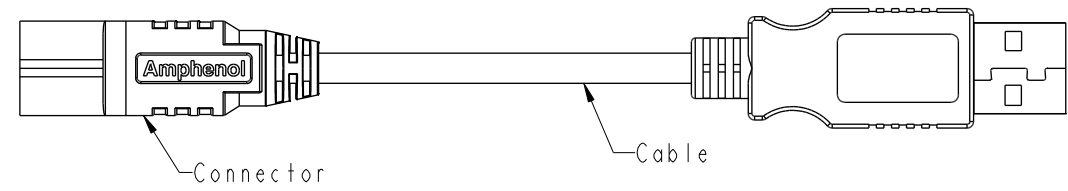


THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

REV.	ECN NO.	DATE	SIGN	DESCRIPTION
A	Initial Released	2020/08/21	Ruru	Old Item No. MUB-20AFF-QA7AXX

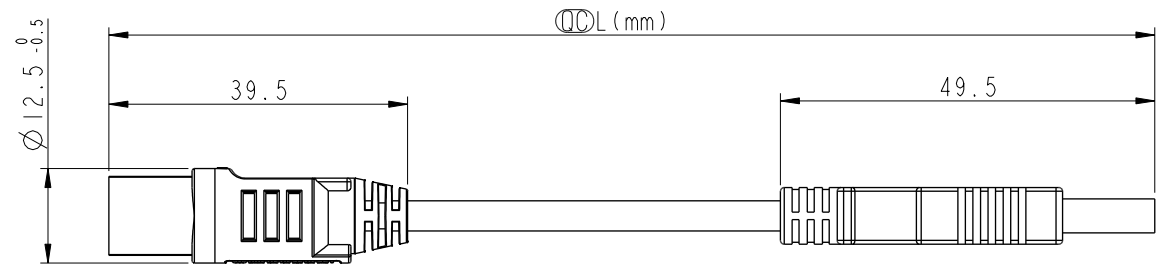

MUB20FL-NAML-QAXXX
 001: 01Meter
 002: 02Meters

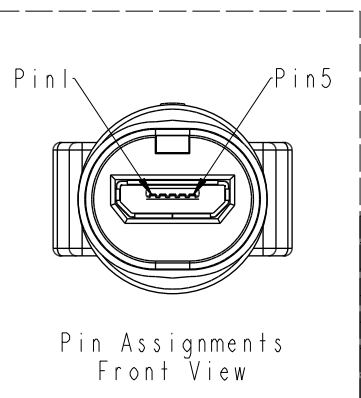

Shield	Drain	地線	Shield
5	Black	黑	4
4	N/A		
3	Green	綠	3
2	White	白	2
1	Red	紅	1
Conn.	Wire Color		Plug

Twist
對線

- Notes:
- * \varnothing Important Dimension To Check.
 - * Waterproof Rate: IPX7.
 - * Connector: Micro USB Type-B Jack.
 - * Outer Mold: Thermoplastic, Black.
 - * Plug: USB2.0 A-Type.
 - * Cable: UL2725, 28AWG*1P+28AWG*2C+D+AL/MY+B, PVC Jacket, OD3.8, Black.
 - * Cable Length Tolerance: 01M: +50/-0mm
02M: +100/-0mm

UNIT:mm

TOLERANCE $\pm 0.5mm$

TITLE ACC, USB, MICRO B, DB-ENDED, FM			
SCALE 1:1	SIZE A4	SHEET 1 OF 1	
REV. A	WC-REV. .0	\varnothing : Inspection item	

Amphenol LTW
 安費諾亮泰企業股份有限公司

ITEM NO.	DRAWN BY Ruru	DATE 2020-08-21
DWG NO. MUB20FL-NAML-QAXXX	CHECKED BY Rita	DATE 2020-08-21
CUSTOMER ALTW	APPROVED BY Max	DATE 2020-08-21