

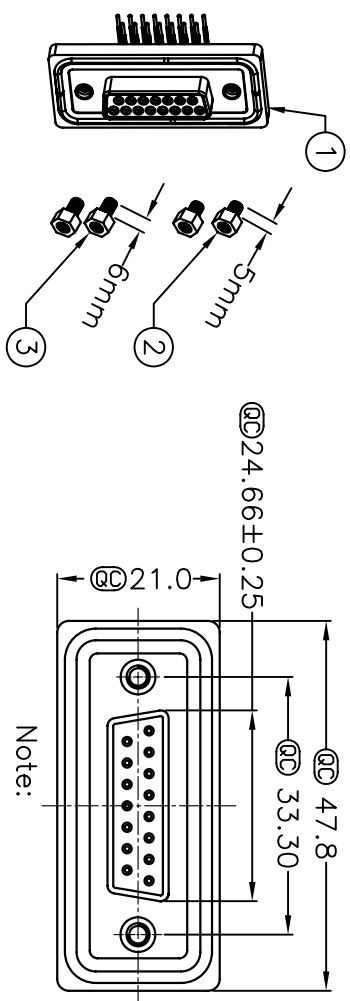



REV.	EON NO.	DATE	SIGN	DESCRIPTION

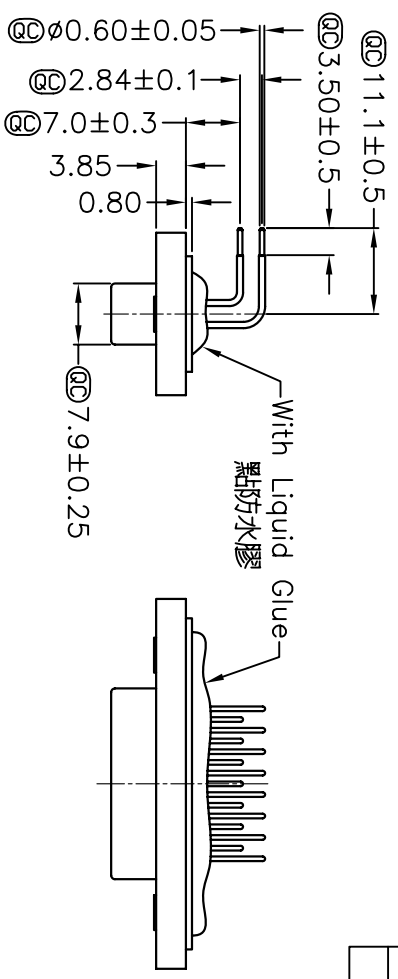


Note:

- \* @Important Dimension.
- \* Waterproof Rate : IP68
- IP68:1M of depth of water 24 hours (防水等級 IP68 )
- 〈 IP68:1米水深 24小時 〉
- \* Do Mating Test After Glued 點膠後,須作對插測試
- \* D-SUB Conn. :Black Core , PBT
- \* Plastic Jacket : Black , Nylon+GF
- \* Pin : Copper Alloy , Gold Plated
- \* Ring : Light Blue,Silicone
- \* Screw : Copper Alloy,Nickel Plated,#4-40 UNC



Screw L=5.0 For Panel Thickness Under 1.2mm  
適用板厚為1.2mm以下

Screw L=6.0 For Panel Thickness Between 1.2~2.0mm  
適用板厚為1.2~2.0mm

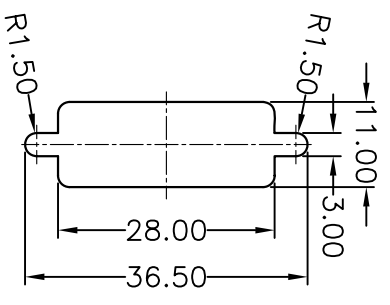

Recommended Panel Cut-Out  
建議挖孔尺寸

UNIT:mm		TITLE		ITEM NO		DRAWN BY		DATE	
TOLERANCE		D-SUB Conn.		LTWSDB-15PFFP-SR8001		Gao Ling		2006/12/09	
X	±0.25	Panel Screw DB15P F Conn. F Pin		DWG NO		CHECKED BY		DATE	
.XX	±0.1	SCALE		LTWSDB-15PFFP-SR8001		Simon		2006/12/09	
.XXX	±0.05	Free		CUSTOMER		APPROVED BY		DATE	
ANGLES	±1°	A4		Max		Max		2006/12/09	
1	2	3	4	5	6	7	8	8 QP02C-01-01A2	