




REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-880366~369	2008/03/08	Li Chi Cheng	Add the partition.
C	LEN1720301~304	2017/02/15	Ruru	Change Logo & Outer Mold Design & Note

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.

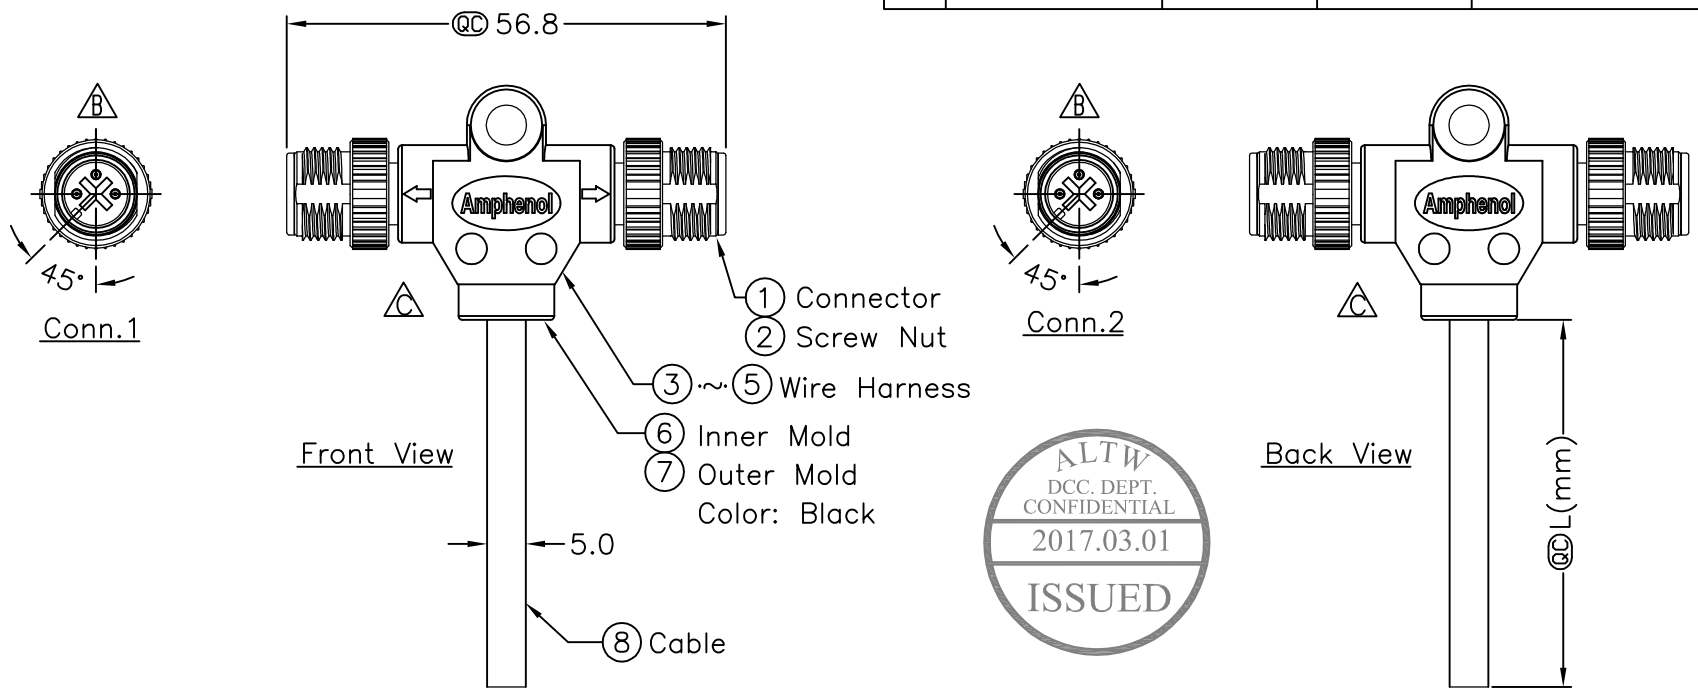

Pin Assignments
Front View

4	Black	黑	4
3	Blue	藍	3
1	Brown	棕	1
Conn.1	Wire Color		Conn.2

Pin Out

SS-030300-MM0-TSAXX

↑
XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:

- * @C Important Dimension.
- * Waterproof Rate: IP68
- * Housing: Black, PU
- * Male Pin: Copper Alloy, Gold Plated
- * Wire Harness: UL1007 24AWG, 3Pcs.
- * Cable: UL2464 22AWG*3C+Talc Black, PVC Jacket UV Resistant OD=5.0mm
- * Cable Length Tolerance: 01M: ±40mm
02M~05M: ±60mm
06M~10M: ±100mm
11M~30M: ±200mm
31M~99M: ±500mm

UNIT:mm TOLERANCE ±0.5 mm	TITLE M12 Conn T Cable Screw MM Conn MM Pin		Amphenol LTW 安費諾亮泰企業股份有限公司	ITEM NO	DRAWN BY Ruru	DATE 2017/02/15
	SCALE Free	SHEET 1 OF 1		DWG NO SS-030300-MM0-TSAXX	CHECKED BY Rita	DATE 2017/02/15
REV. C	SIZE A4	@C :Inspection Item		CUSTOMER ALTW	APPROVED BY Max	DATE 2017/02/15