

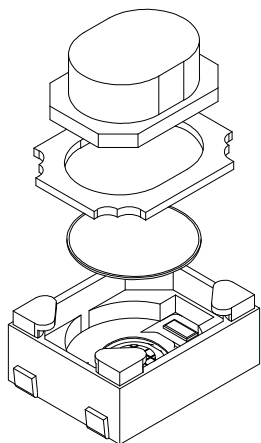


SAMZO REAC/ROHS

REV	ECN NO	DESCRIPTION	DESIGN	APPROVAL	DATE
A1	NEW	Replace frame			2018.06.12





← E
← D
← C
← B
← A




主要技术参数、性能
The Main Thchnology Performance

额定电流、电压 Rate voltage, current	50mA DC12V
接触电阻 Contact resistance	≤100mΩ
按力 Operating force	±50gf
行程 Travel	0.20±0.10mm
绝缘电阻 Insulated resistance	≥100MΩ
介电强度 Dielectric strength	≥250VAC/1min

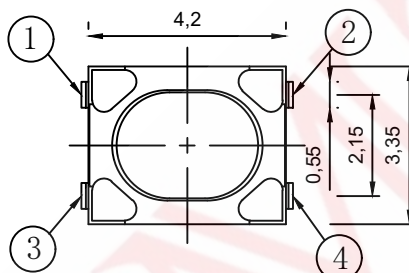


S 4 E 2 5 * 1 1 0
A B C D E F G H

- A. 系列:S-3*4mm系列
- B. 贴装方式:4-立式贴片
- C. 引脚规格:E-4P
- D. 操作高度:25-2.5mm
- E. 操作力度:1-180gf/2-260gf
- F. 操作寿命:1-50,000次
- G. 固定方式:1-无柱
- H. 物料编码:0-常规(确认待编)




电路图
CIRCUIT DIAGRAM



PCB. 焊接图
PCB. WELDING DRAWING

ITEM	DESCRIPTION	MATERIAL	QTY	FINISH/COLOR					
E	按钮	PPA	1	白色	GENERAL TOLERANCE				
D	盖板	磷铜	1	镀铜锡	≥0~2<	±0.15			
C	弹片	不锈钢	1	镀银	DESIGN	WANGGUIFA	2018.06.12	≥2~5<	±0.25
B	本件	LCP	1	白色	CHECKED	ZHENGUILAN	2018.06.12	≥0~2<	±0.15
A	卡件	磷铜	1	镀银	APPROVED	LILIANJIANG	2018.06.14	≥5	±0.35

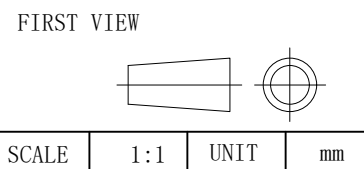

The copyright belongs to samzo parts [China] Co., Ltd. please use the material after samzo parts agree to authorize. The final right of interpretation belongs to samzo parts.
WWW.KKK-JP.COM

TITLE::	3.35*4.2*2.5 4P-LT
DWG NO:	S4E25-P16
PART NO:	S4E25036
MODEL NO:	S4E25-* -110
NAME:	TACT SWITCH

SAMZO COMPONENTS
Electronic switch and connector manufacturer