


ITEM	PART#	DESCRIPTION	QTY	UOM
A,B	5023801000	1.25 W/B Single Plg Hsg 10Ckt	2	PC
C	5023810000	1.25 W/B Single Plg Term W/Pit	20	PC
D	--	WHITE PART ID LABEL	1	PC

FROM	TO	DESCRIPTION	COLOUR
A1	B1	1X26AWG DISC BK	BLACK
A2	B2	1X26AWG DISC BK	BLACK
A3	B3	1X26AWG DISC BK	BLACK
A4	B4	1X26AWG DISC BK	BLACK
A5	B5	1X26AWG DISC BK	BLACK
A6	B6	1X26AWG DISC BK	BLACK
A7	B7	1X26AWG DISC BK	BLACK
A8	B8	1X26AWG DISC BK	BLACK
A9	B9	1X26AWG DISC BK	BLACK
A10	B10	1X26AWG DISC BK	BLACK

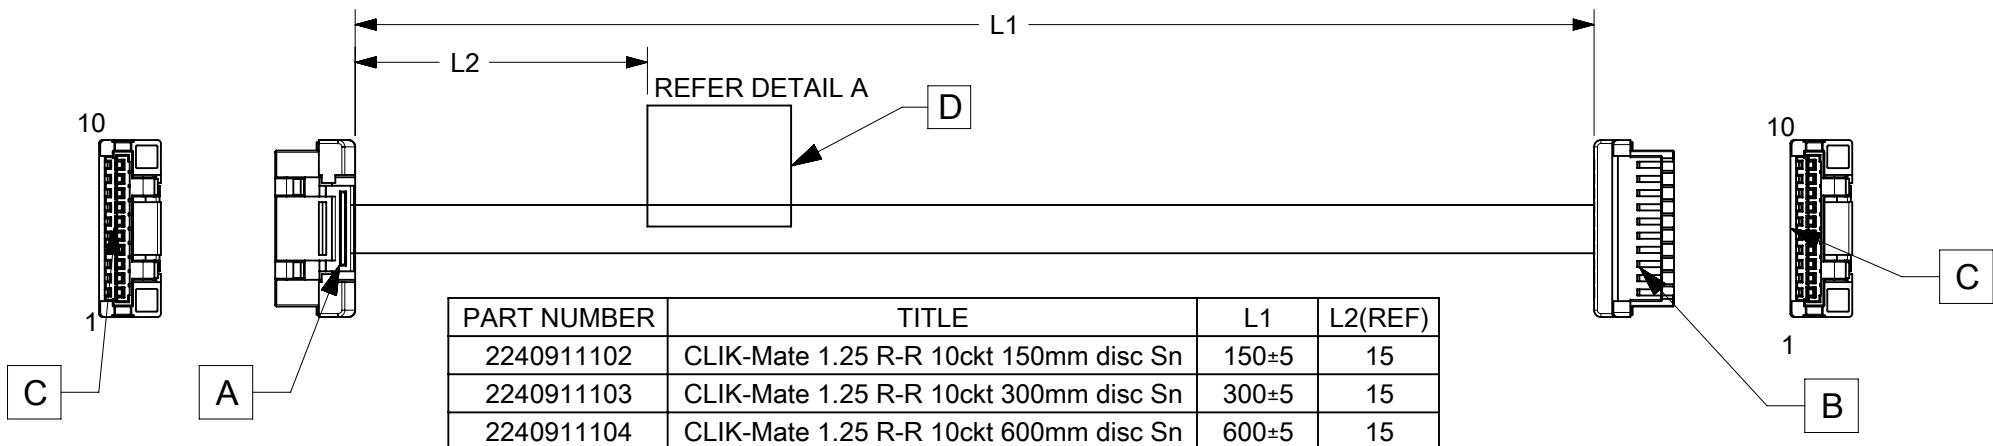

PART NUMBER	TITLE	L1	L2(REF)
2240911102	CLIK-Mate 1.25 R-R 10ckt 150mm disc Sn	150±5	15
2240911103	CLIK-Mate 1.25 R-R 10ckt 300mm disc Sn	300±5	15
2240911104	CLIK-Mate 1.25 R-R 10ckt 600mm disc Sn	600±5	15

MOLEX P/N  
MOLEX  
BATCH WK/YR

DETAIL A

- NOTES
1. CABLE ASSEMBLY TO BE TESTED 100% FOR CONTINUITY AND POLARITY.
  2. CONNECTOR VIEW SHOWN IS FROM MATING SIDE.
  3. LABEL TEXT MUST BE 2 MM MAX. IN HEIGHT WITH ARIAL FONT.
  4. LABEL MUST BE WRAPPED IN FLAG TYPE ON A SINGLE CABLE.

REVISION				
DATE	REV	DESCRIPTION	CHANGER	
2023/11/04	C	INITIAL RELEASE	THANUB	
RELEASE STATUS	P1	RELEASE DATE	2023/05/05	16:46:44

FUNCTIONAL SYMBOLS $\nabla_A = 0$ $\nabla_E = 0$ $\nabla_P = 0$ DIVISIONAL SYMBOLS	DIMENSION UNITS: <b>mm</b> SCALE: <b>NTS</b>		CURRENT REV DESC:		
	GENERAL TOLERANCES (UNLESS SPECIFIED)		EC NO: 745876 DRWN: THANUB    2023/04/11 CHK'D: BCAPPS    2023/05/05 APPR: BCAPPS    2023/05/05		
	ANGULAR TOL ± °		INITIAL REVISION: DRWN: THANUB    2023/01/15 APPR: SKUMAR07    2023/02/06		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		THIRD ANGLE PROJECTION	DRAWING: <b>A4-SIZE</b>	SERIES: <b>224091</b>
MOLEX P/N MOLEX BATCH WK/YR			SEE TABLE		
PRODUCT CUSTOMER DRAWING			DOCUMENT NUMBER: <b>2240911100</b>	DOC TYPE: <b>PSD</b>	DOC PART: <b>000</b>
REVISION			REVISION: <b>C</b>		
GENERAL MARKET			SHEET NUMBER: <b>1 OF 1</b>		