


Product Area Male socket, front fastened, dip solder, 6 mm contact length
M12 connectors A-Coding serie 713/763

Pole 8
Article number 09 3482 680 08

illustration




scale drawing

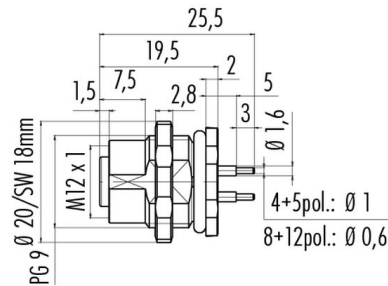


Ausführung mit Zink Druckgussgehäuse
Version with zinc diecasted housing

Contact Arrangement



	X	Y
1	-2,69	0,57
2	-0,57	2,69
3	1,66	2,20
4	2,75	0,19
5	1,94	-1,94
6	-0,19	-2,75
7	-2,20	-1,66
8	0,00	0,00

Installation instructions / Mounting cutout

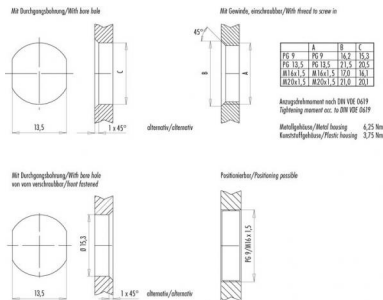

Technical data

Common values

Connector Design	Female socket
Connector locking system	Screw-locking
Termination	dip solder
Upper temperature	+85 °C
Lower temperature	-25 °C

Material

Material of contact	CuSn (bronze)
Contact plating	Au (gold)
Material of contact body	PA
Material of housing	stainless steel 1.4404

Electrical values

Rated voltage	60 V
Rated impulse voltage	800 V
Pollution degree	3
Overvoltage category	II
Material group	II
Rated current (40°C)	2 A
Volume resistivity	≤ 3 mΩ
Degree of protection	IP 68
Mechanical operation	>100 mating cycles

Cable data

Contacts 8: Male socket, front fastened, dip solder, 6 mm contact length, stainless steel