

Features

- ◆ Wide 2:1 input voltage range
- ◆ Fully regulated output voltage
- ◆ Compact SIP-8 package
- ◆ Models with 1'500 VDC and 3'000 VDC I/O isolation (functional insulation)
- ◆ Small footprint
- ◆ Temperature range -40° to $+85^{\circ}\text{C}$
- ◆ High efficiency up to 85%
- ◆ Short-circuit protection
- ◆ Remote On/Off control
- ◆ 3-year product warranty



The TMR-3 series is a new family of isolated 3W dc-dc converter modules with regulated output, featuring wide 2:1 input voltage ranges. The product comes in a compact SIP-8 plastic package with a small footprint occupying only 2.0 cm² (0.3 square in.) of board space.

An excellent efficiency allows -40° to $+85^{\circ}\text{C}$ operation temperatures. Further features include remote On/Off control and continuous short circuit protection. The compact dimensions of these converters make them an ideal solution for many space critical applications in communication equipment, instrumentation and industrial electronics.

Models

Order code		Input voltage range	Output voltage	Output current max.	Efficiency typ.
1500 VDC isolation	3000 VDC isolation				
TMR 3-0510	TMR 3-0510HI	4.5 – 9.0 VDC (5 VDC nominal)	3.3 VDC	700 mA	75 %
TMR 3-0511	TMR 3-0511HI		5 VDC	600 mA	79 %
TMR 3-0512	TMR 3-0512HI		12 VDC	250 mA	81 %
TMR 3-0513	TMR 3-0513HI		15 VDC	200 mA	82 %
TMR 3-0521	TMR 3-0521HI		± 5 VDC	± 300 mA	78 %
TMR 3-0522	TMR 3-0522HI		± 12 VDC	± 125 mA	81 %
TMR 3-0523	TMR 3-0523HI		± 15 VDC	± 100 mA	81 %
TMR 3-1210	TMR 3-1210HI		9 – 18 VDC (12 VDC nominal)	3.3 VDC	700 mA
TMR 3-1211	TMR 3-1211HI	5 VDC		600 mA	81 %
TMR 3-1212	TMR 3-1212HI	12 VDC		250 mA	83 %
TMR 3-1213	TMR 3-1213HI	15 VDC		200 mA	83 %
TMR 3-1221	TMR 3-1221HI	± 5 VDC		± 300 mA	82 %
TMR 3-1222	TMR 3-1222HI	± 12 VDC		± 125 mA	83 %
TMR 3-1223	TMR 3-1223HI	± 15 VDC		± 100 mA	83 %
TMR 3-2410	TMR 3-2410HI	18 – 36 VDC (24 VDC nominal)		3.3 VDC	700 mA
TMR 3-2411	TMR 3-2411HI		5 VDC	600 mA	82 %
TMR 3-2412	TMR 3-2412HI		12 VDC	250 mA	83 %
TMR 3-2413	TMR 3-2413HI		15 VDC	200 mA	84 %
TMR 3-2421	TMR 3-2421HI		± 5 VDC	± 300 mA	80 %
TMR 3-2422	TMR 3-2422HI		± 12 VDC	± 125 mA	83 %
TMR 3-2423	TMR 3-2423HI		± 15 VDC	± 100 mA	85 %
TMR 3-4810	TMR 3-4810HI		36 – 75 VDC (48 VDC nominal)	3.3 VDC	700 mA
TMR 3-4811	TMR 3-4811HI	5 VDC		600 mA	79 %
TMR 3-4812	TMR 3-4812HI	12 VDC		250 mA	81 %
TMR 3-4813	TMR 3-4813HI	15 VDC		200 mA	82 %
TMR 3-4821	TMR 3-4821HI	± 5 VDC		± 300 mA	79 %
TMR 3-4822	TMR 3-4822HI	± 12 VDC		± 125 mA	82 %
TMR 3-4823	TMR 3-4823HI	± 15 VDC		± 100 mA	83 %

Input Specifications

Input current at full load / at no load (nominal input voltage)	5 Vnom models: 810 mA max. / 60 mA typ. 12 Vnom models: 330 mA max. / 30 mA typ. 24 Vnom models: 160 mA max. / 18 mA typ. 48 Vnom models: 85 mA max. / 12 mA typ.
Surge voltage (100 msec. max.)	5 Vnom models: 15 V max. 12 Vnom models: 36 V max. 24 Vnom models: 50 V max. 48 Vnom models: 100 V max.
Input voltage variation (dv/dt)	5 V/ms, max. (complies with ETS300 132 part 4.4)
Input filter	capacitor type (see application note for compliance to EN 55022 class A/B)
Start up time (constant resistive load)	– Power On: 30 ms typ. – Remote On: 30 ms typ.

Output Specifications

Voltage set accuracy	±1 % max
Regulation	– Input variation Vin min. to Vin max.: 0.2 % max. – Load variation 5 – 100% single output models: 0.5 % max. dual output models: 1.0 % max. balanced load – Load variation 0 – 100% single output models: 1.0 % max. dual output models: 1.0 % max. balanced load – Load cross regulation 25/100%: 5.0 % max. (dual output models)
Minimum load	not required
Ripple and noise (20 MHz Bandwidth)	50 mVp-p max.
Transient response setting time (25% load step change)	500 µs typ.
Short circuit protection	continuous, automatic recovery
Capacitive load	3.3 VDC / 5 VDC output models: 3300 µF max. / 1680 µF max. 12 VDC / 15 VDC output models: 820 µF max. / 680 µF max. ±5 VDC / ±12 VDC output models: ±1000 µF max. / ±470 µF max. ±15 VDC output models: ±330 µF max.

General Specifications

Temperature ranges	– Operating: –40°C to +85°C – Case temperature: +100°C max. – Storage: –55°C to +105°C
Load derating	3.3 %/K above 70°C
Humidity (non condensing)	5 – 95 % rel. H max.
Temperature coefficient	±0.02 %/K
Reliability, calculated MTBF (MIL-HDBK-217F, at +25°C, ground benign)	>4.8 Mio h
Isolation voltage (60 sec.)	– Input/Output: 1600 VDC with suffix -HI: 3000 VDC
Isolation capacitance	– Input/Output: 200 pF max. with suffix -HI: 40 pF max.
Isolation resistance	– Input/Output (500 VDC): >1 GOhm
Switching frequency	100 kHz min. (PFM)
Remote On/Off	– On: open or high impedance – Off: 2...4 mA current applied via 1KOhm resistor – Off stand by input current: 2.5 mA max.

All specifications valid at nominal input voltage, full load and +25°C after warm-up time unless otherwise stated.

General Specifications


Safety standards	- Certification documents	IEC/EN 60950-1, UL 60950-1 www.tracopower.com/overview/tmr3
Environmental compliance	- Reach - RoHS	www.tracopower.com/info/reach-declaration.pdf RoHS directive 2011/65/EU

Physical Specifications

Casing material	non-conductive plastic
Potting material	silicone, (UL 94V-0 rated)
Weight	4.8 g (0.17oz)

Supporting documents: www.tracopower.com/overview/tmr3

Outline Dimensions mm (inches)

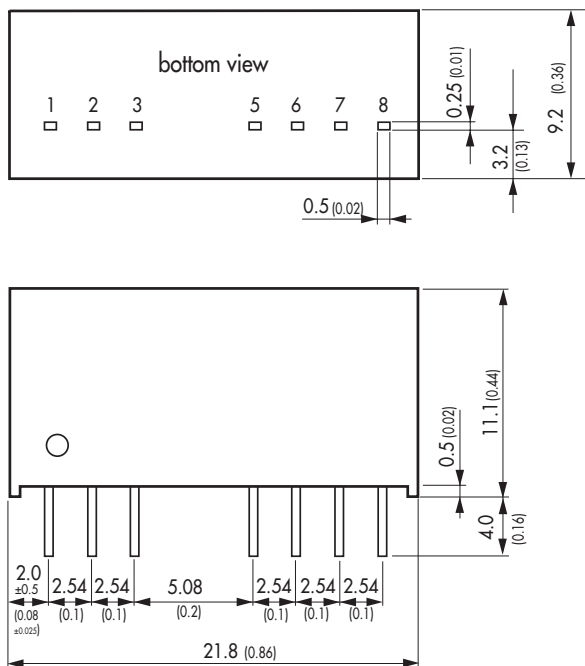

Pin-Out		
Pin	Single	Dual
1	-Vin (GND)	-Vin (GND)
2	+Vin (Vcc)	+Vin (Vcc)
3	Remote On/Off	Remote On/Off
5*	No function	No function
6	+Vout	+Vout
7	-Vout	Common
8	No function	-Vout

*No pin 5 with HI version

Dimensions in [mm], () = Inch
Tolerances: ±0.5 (±0.02)
Pin pitch tolerances: ±0.25 (±0.01)

Specifications can be changed without notice! Make sure you are using the latest documentation, downloadable at www.tracopower.com