

Terminal Part Number: 15344660

Surface Plating: SN

Material Thickness [mm]: -

Cross Section [mm²]: 2,00

Cable Type codes: 1005

Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY

Insulation Range Φ[mm]: 2,45 - 2,70

Seal(s): 15324973 | 15327863

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1005 2,00 / 15324973		2,58	180	1,70	0,05	2,55	0,10	4,00	0,10	4,00	0,10
1005 2,00 / 15327863		2,58	180	1,70	0,05	2,55	0,10	4,00	0,10	4,00	0,10

Cable type code legend:

1005:



Industry Designator: SAE

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PVC, PVDF, XLPE

Insul. Wall Designator: THIN

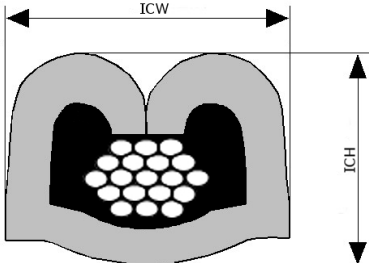

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 1007
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,85 - 3,10
Seal(s): 15327859

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
1007 2,00 / 15327859		2,98	180	1,70	0,05	2,55	0,10	4,20	0,10	4,10	0,10

Cable type code legend:

1007:

Industry Designator: SAE
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPA/PVDF, XLPE
Insul. Wall Designator: REGULAR

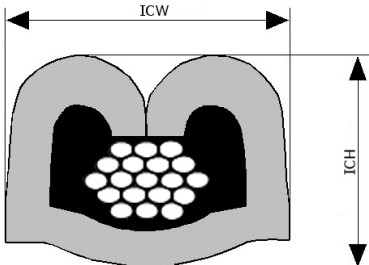

Crimp Information Sheet

DELPHI

Terminal Part Number: 15344660
 Surface Plating: SN
 Material Thickness [mm]: -
 Cross Section [mm²]: 0,75 | 1,50 | 2,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*

Cable Type codes: 2010
 Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
 Insulation Range Φ [mm]: 1,60 - 3,00
 Seal(s): 15327863 | 15324973 | 15327859 | 15339838

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2010 0,75 / 15339838		1,75	235	1,90	0,05	2,65	0,10	4,20	0,10	4,20	0,10
2010 1,50 / 15327863		2,20	200	1,70	0,05	2,60	0,10	4,00	0,10	4,15	0,10
2010 1,50 / 15324973		2,20	200	1,70	0,05	2,60	0,10	4,00	0,10	4,15	0,10
2010 2,50 / 15327859		2,80	250	1,90	0,05	2,65	0,10	4,20	0,10	4,15	0,10
2010 2,50 / 15324973		2,80	250	1,90	0,05	2,65	0,10	4,20	0,10	4,15	0,10

Cable type code legend:

2010: ACW0219, FIAT T2 FLRY, FL RENAULT R1, FL RENAULT R3, FLR (AGP0219), FLR2X-A, FLR4Y-A, FLR9Y, FLRX-B, FLRY-A, FLRYB, FLRY-B



Industry Designator: DIN

Conductor Material: COPPER

Conductor Plating: NONE

Insul. Material: PA, POLYOLEFIN, PP, PVC, SYNTHRESIN, XLCOPOLY, XLPBT, XLPE, XLPE/PVDF, XLPVC

Insul. Wall Designator: THIN

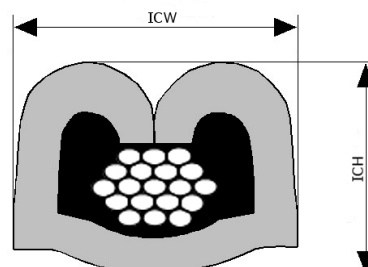

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 2,00

This document is non-contractual
and for information only.

For more information, please
consult your local sales office



Cable Type codes: 2013
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,80
Seal(s): 10777518 | 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2013 2,00 / 10777518		2,65	180	1,70	0,05	2,60	0,10	4,10	0,10	4,10	0,10
2013 2,00 / 15324973		2,65	180	1,70	0,05	2,60	0,10	4,10	0,10	4,10	0,10

Cable type code legend:

2013:

Industry Designator: DIN
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PUR, PVC, SYNTHRESIN, XLPE, XLPE/PVDF
Insul. Wall Designator: THIN

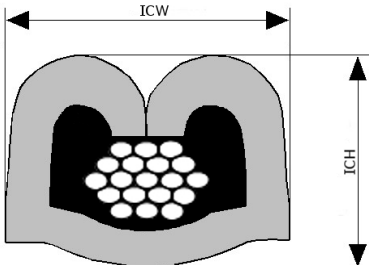

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 2,50

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 2083
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,70 - 3,00
Seal(s): 15324973

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
2083 2,50 / 15324973		2,85	210	1,80	0,05	2,60	0,10	4,20	0,10	4,10	0,10

Cable type code legend:

2083:

Industry Designator: ISO
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC (YW)
Insul. Wall Designator: THIN

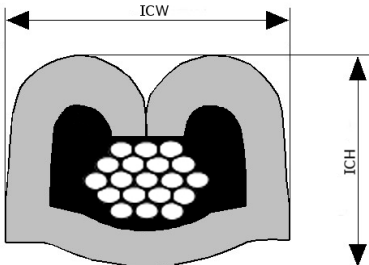

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*

*For more information, please
consult your local sales office*



Cable Type codes: 3002
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 3,00 - 3,40
Seal(s): 15327859

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3002 2,00 / 15327859		3,20	180	1,70	0,05	2,60	0,10	4,00	0,10	4,30	0,10

Cable type code legend:

3002:

Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPVC
Insul. Wall Designator: REGULAR

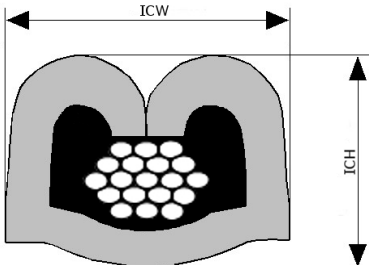

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 2,00

*This document is non-contractual
and for information only.*



*For more information, please
consult your local sales office*

Cable Type codes: 3003
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,50 - 2,80
Seal(s): 15339838

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3003 2,00 / 15339838		2,65	180	1,70	0,05	2,60	0,10	4,10	0,10	4,10	0,10

Cable type code legend:

3003: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, X-PVC
Insul. Wall Designator: THIN

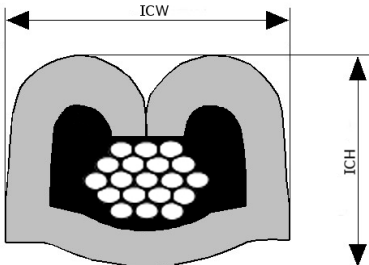

Terminal Part Number: 15344660
Surface Plating: SN
Material Thickness [mm]: -
Cross Section [mm²]: 1,25

This document is non-contractual
and for information only.

For more information, please
consult your local sales office

Cable Type codes: 3004
Crimp Process: (C) CRIMP ONLY - TERMINAL IS APPLIED CRIMP ONLY
Insulation Range Φ[mm]: 2,00 - 2,20
Seal(s): 15339838 | 12147387 | 15327863

Cable type / seal	Arrangement	Nominal Insul. diam [mm]	Tear-out force [N]	CCH [mm]	Tol CCH [mm]	CCW [mm]	Tol CCW [mm]	ICH [mm]	Tol ICH [mm]	ICW [mm]	Tol ICW [mm]
3004 1,25 / 15339838		2,10	135	1,50	0,05	2,60	0,10	3,70	0,10	4,00	0,10
3004 1,25 / 12147387		2,10	135	1,50	0,05	2,60	0,10	3,70	0,10	4,00	0,10
3004 1,25 / 15327863		2,10	135	1,50	0,05	2,60	0,10	3,60	0,10	4,00	0,10

Cable type code legend:

3004: AVSS
Industry Designator: JIS/JA
Conductor Material: COPPER
Conductor Plating: NONE
Insul. Material: PVC, XLPE, X-PVC
Insul. Wall Designator: THIN

