



REV.	ECN NO.	DATE	SIGN	DESCRIPTION
B	LEN-790203	2007/09/13	WUFEI	Change Nut
C	LEN-920176~79	2008/09/16	Li Xiu Zhi	Change View
D	LEN1710138~43	2017/01/17	Ruru	Change Logo

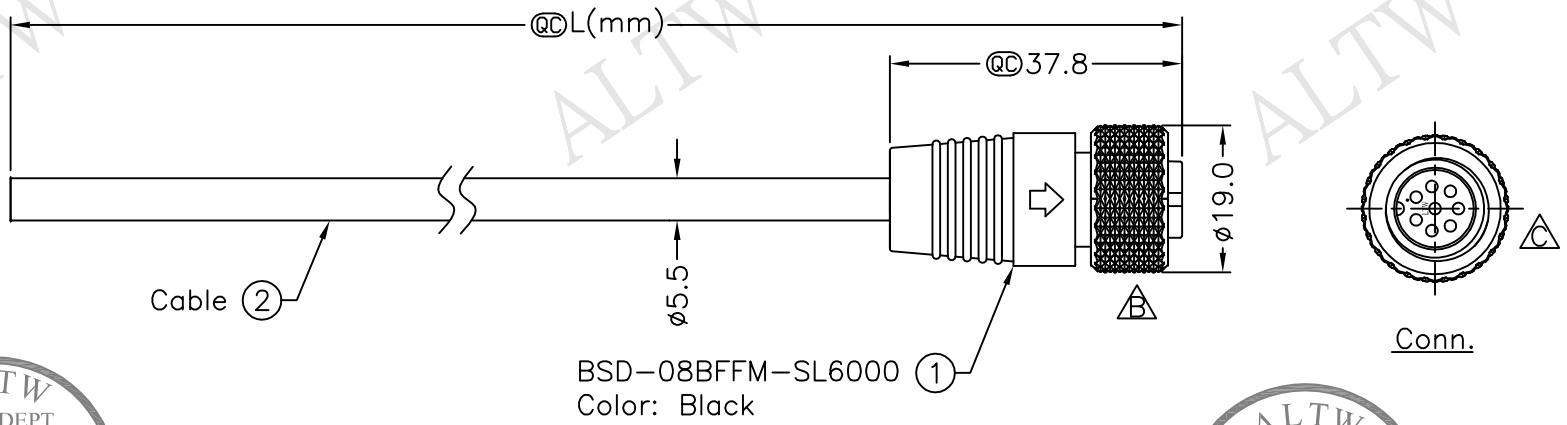

BSD-08BFFM-SL6000
Color: Black


BSD-08BFFM-SL6AXX

XX:01~99Meter
01:01Meter
02:02Meters
:
:
99:99Meters

Cable Length(L):01~99Meters

Note:

- * @Q Important Dimension To Check.
- * Waterproof Rate: IP66
- * Housing: Black, Nylon+GF
- * Pin: Brass, Gold Plated
- * Cable: Black, UL2464 24AWG*8C+Drain+Al/My (UV Resistant), OD=5.5
- * Cable Length Tolerance: 01M:40mm
02M~05M:60mm
06M~10M:100mm
11M~30M:200mm
31M~99M:500mm



Pin Assignments
Front View

Shield	Drain	地線
8	Green	綠
7	Yellow	黃
6	Orange	桔
5	Red	紅
4	Blue	藍
3	White	白
2	Brown	棕
1	Black	黑
Conn.	Wire Color	
	Pin Out	

UNIT:mm	
TOLERANCE	±0.5 mm

TITLE	Standard	
	Cable Screw 8Pin F Conn F Pin	
SCALE	Free	SHEET 1 OF 1
REV.	D	SIZE A4
		@QC :Inspection Item

Amphenol LTW
安費諾亮泰企業股份有限公司

ITEM NO	DRAWN BY	DATE
DWG NO	CHECKED BY	DATE
CUSTOMER	APPROVED BY	DATE
	Ruru	2017/01/17
	Rita	2017/01/17
	Max	2017/01/17

THIS DOCUMENT IS SUBJECT TO CHANGE WITHOUT NOTICE. IT IS CONFIDENTIAL AND A PROPERTY OF Amphenol LTW. DISCLOSURE TO THIRD PARTY HAS TO BE AUTHORIZED BY Amphenol LTW.